

# 54 Inch LED Ceiling Fan OZ

Olde Bronze

Project Name: \_\_\_\_\_

Location: \_\_\_\_\_

Type: \_\_\_\_\_

Qty: \_\_\_\_\_

Comments: \_\_\_\_\_




## Product Information

Finish	Olde Bronze
Blade Finish	Walnut

## Specifications

Number of Blades	4
Blades Included	Yes
Blade Pitch	14 Degrees
Blade Sweep	52"
Blades Reversible	No
Blade Material	ABS
Optional Blades Available	No
Downrod 1	1.00 OD X 6.00
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	78.00"
Motor Size	188MM X 25MM
Motor Type	AC

## Dimensions

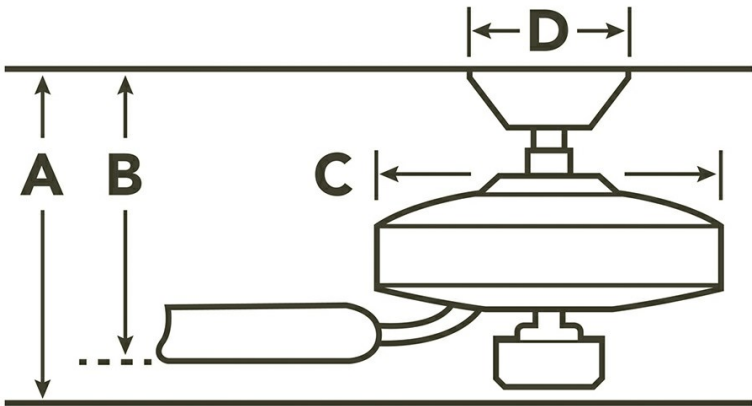

Downrod	A	B	C	D
1.00 OD X 6	20.00	10.50	15.00	6.25

## Downlight

Downlight Included	Yes
Light Source	LED
Downlight Bulb Included	Integrated
Downlight Bulb Type	LED
Number of Lights/LEDs	1
Watts	60/11
Initial Lumens	1600
Glass Description	Cased Opal
Optional Light Kit Available	No
Kelvin Temperature	3000K
Color Rendering Index	80

## Safety Listings & Certifications

Safety Rated	Wet
--------------	-----

## Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
--------	---------	-------	---------	---------

## Installation

The electrical junction box and support structure must be

**Notes:**  
1) Information provided is subject to change without notice.  
All values are design or typical values when measured under laboratory conditions.  
2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.

# 54 Inch LED Ceiling Fan OZ

Olde Bronze

Project Name: \_\_\_\_\_  
Location: \_\_\_\_\_  
Type: \_\_\_\_\_  
Qty: \_\_\_\_\_  
Comments: \_\_\_\_\_

Finish	Fixture	Glass	Blade 1	Blade 2
Olde Bronze		CASED OPAL	WALNUT	
Weathered Zinc		CASED OPAL	WEATHERED WHITE	

Installation requirements	securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120v 60Hz ac
Hanging Weight	35.38 LBS
Minimum Distance Between Bottom Of Fan Blade To Floor	7 feet

**Notes:**  
1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.  
2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.