

installation instructions

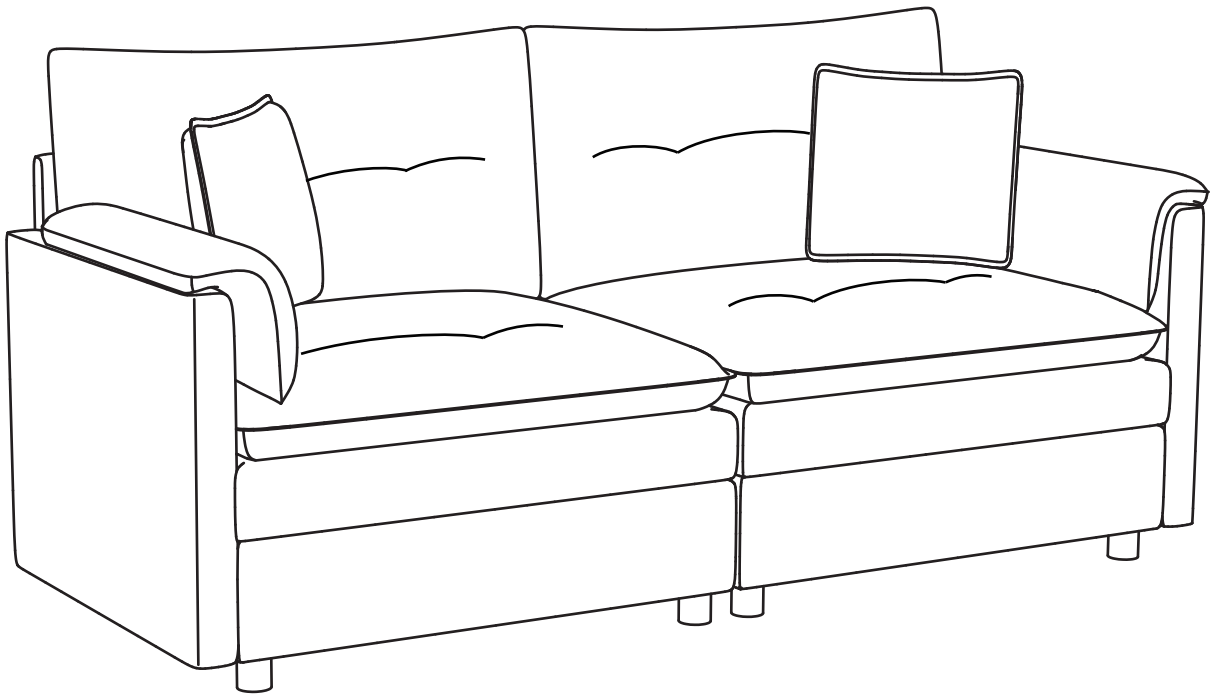


LABEL		DESCRIPTION	LABEL
A1		Left facing armrest	1
A2		Right facing armrest	1
B		Backrest	2
C1		Left facing seat frame	1
C3		Right facing seat frame	1
E		Middle position seat cushion	2
G		Throw pillow	2
H1		Left facing armrest cover	1
H2		Right facing armrest cover	1
I		Throw pillow	2
J1		Sofa leg	8
J2		Plastic washer	8
J3		Felt pad	8
K		M6*25	16+1
L		Backrest hanging plugin	8
M		Allen wrench	1
N		Seat frame connector	2
O		M6*25	8+1
P		Washer	4+1
Q		Lower buckle of backrest	4

Step 1： Install sofa feet at the four corners of C1,C3.

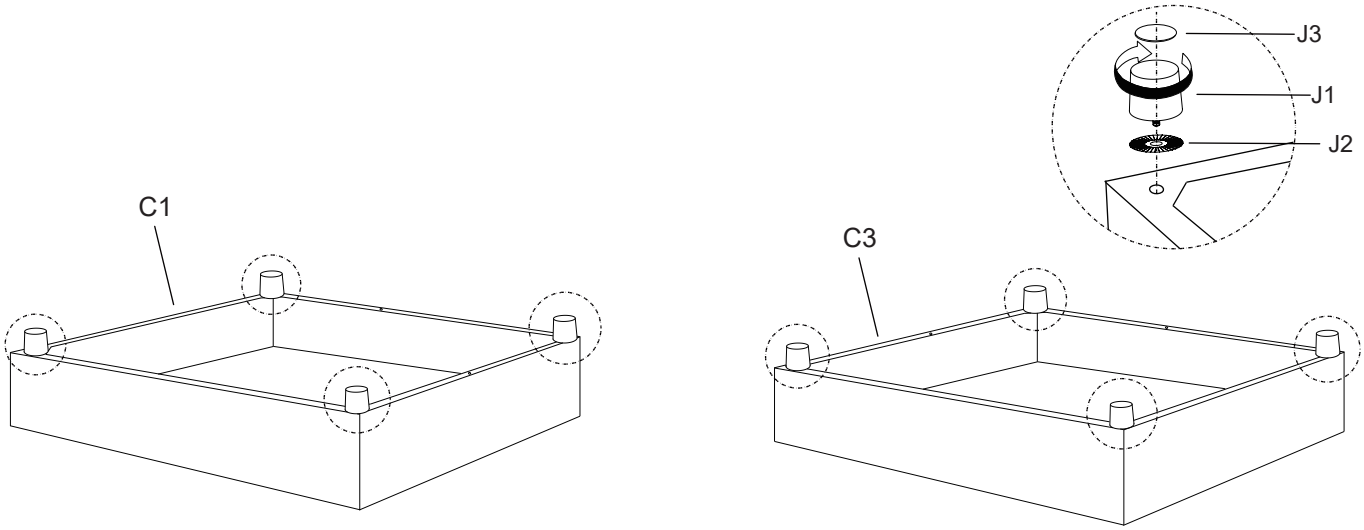


Step 2: As shown in the figure, install screw O.

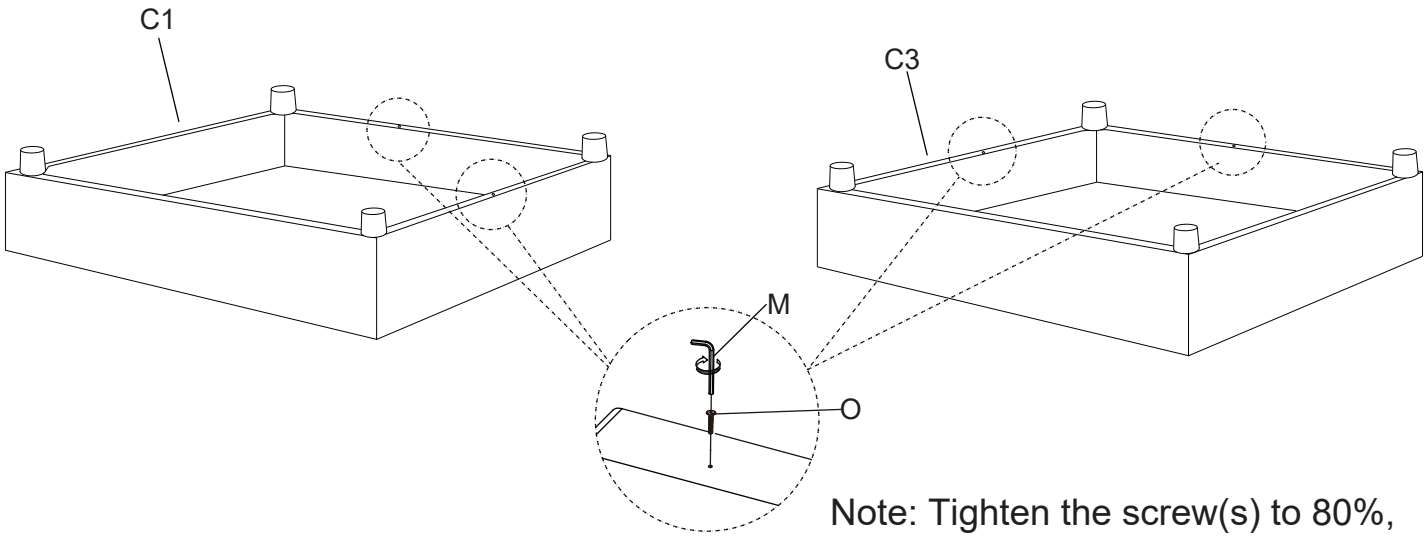


Note: Tighten the screw(s) to 80%, with 10mm of the screw exposed.

Step 3: Install the backrest hangers and base snaps in sequence.

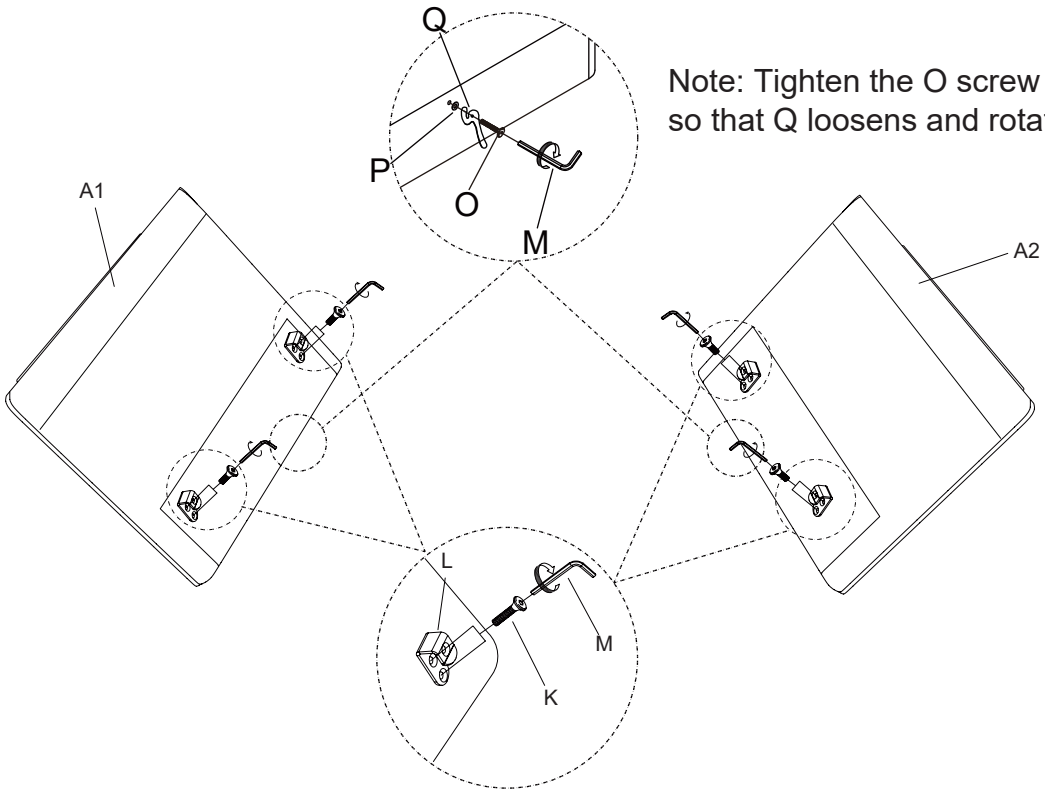


Note: Tighten the O screw to 80% so that Q loosens and rotates.

Step 4: Install the backrest hangers and base snaps in sequence.

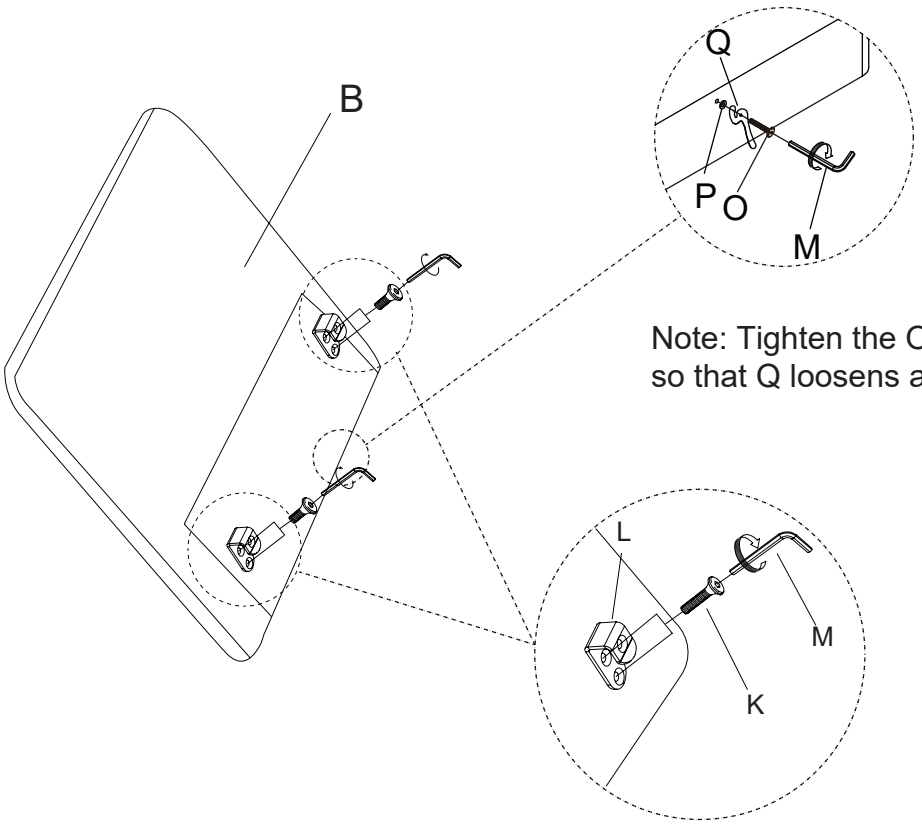


Note: Tighten the O screw to 80% so that Q loosens and rotates.


Step 5：Install left and right armrests sequentially, ensuring they are flush with the front and rear of the seat frame. Next, align the backrest flush with both sides, theninstall the armrest cover.

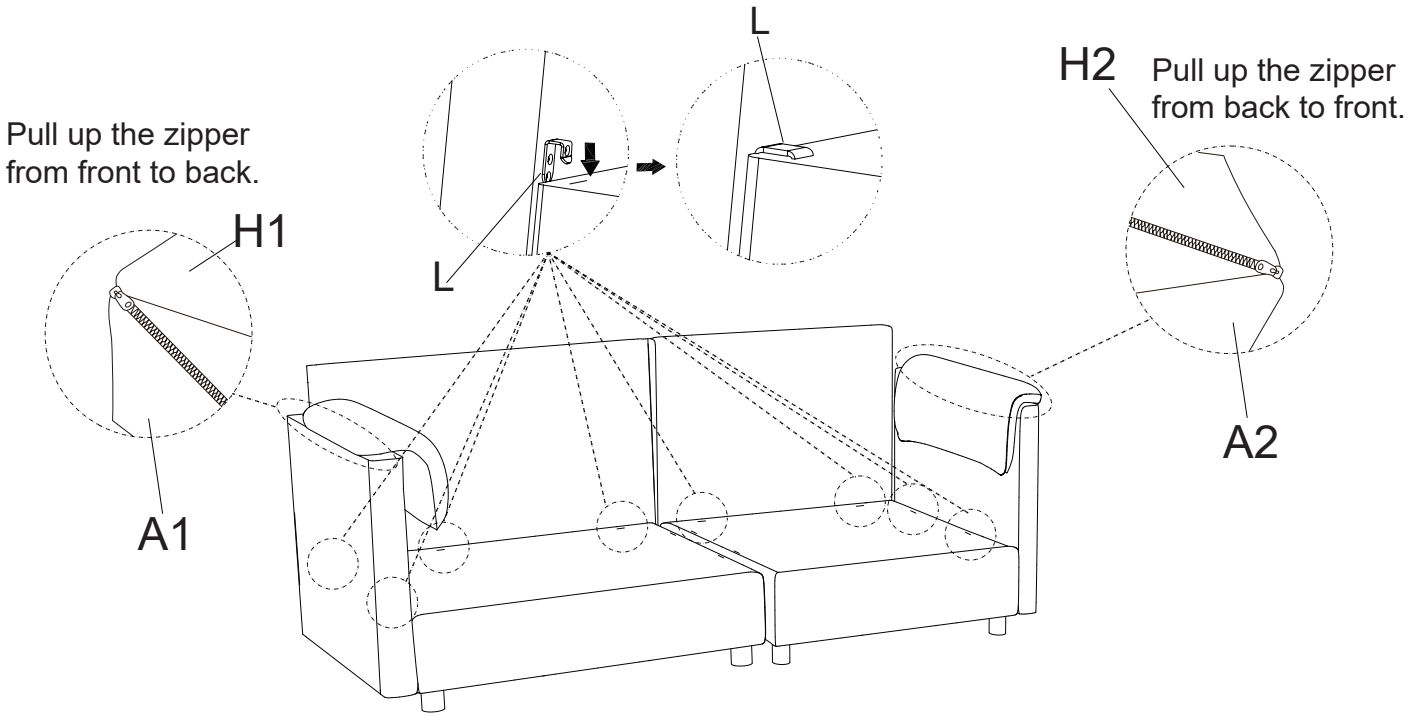

Step 6：Connect the armrest, backrest, and seat frame in sequence, and fix them by rotating Q.

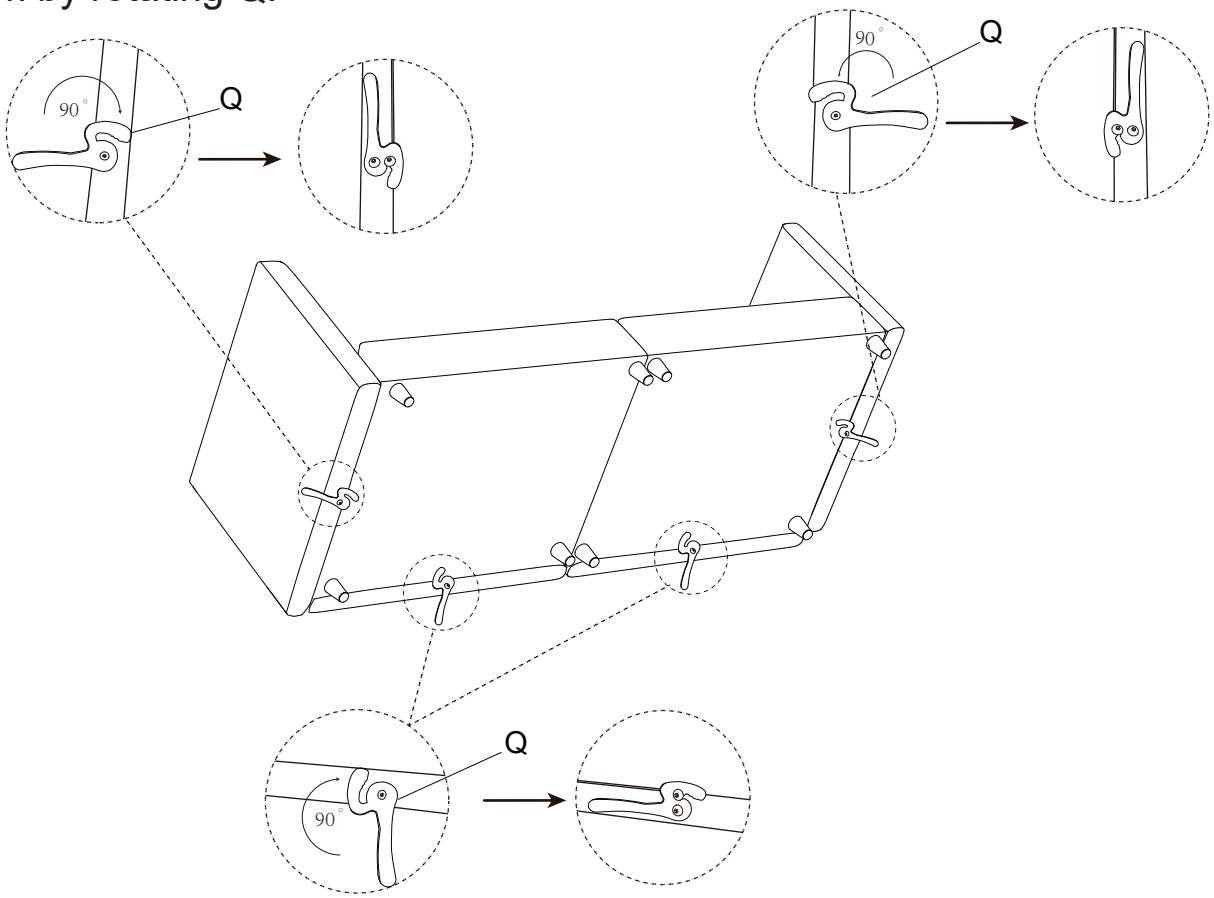

Step 7 : Ensure C1 and C3 are butted tightly together, then install N sequentially from front to back.

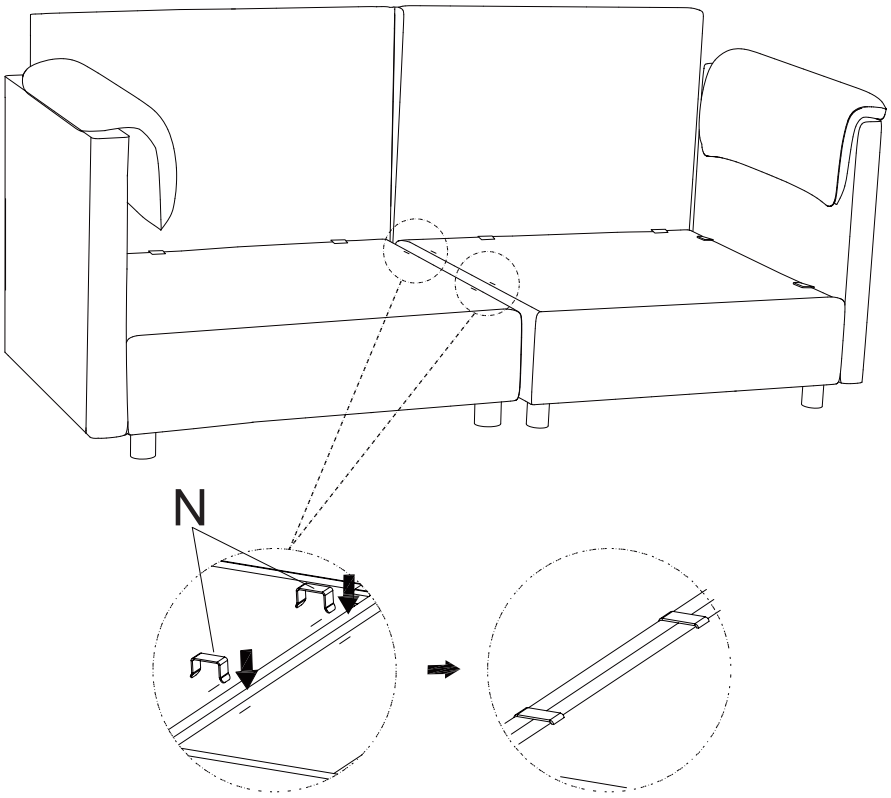

Step 8 : For the center seat cushion pull points, the one closer to the edge is the front, and the one farther from the edge is the rear.

