








Wood X-Back Non-Swivel Counter Stool

Examine all packaging material for small parts that may have come loose during shipment. Periodic checks are recommended to insure that all components are in proper position, tight and free from damage. Keep this assembly instruction for future reference. Adult assembly is required.

CODE	QTY	HARDWARE
1	2	1/4" x 38mm Allen Bolts 
2	4	1/4" x 80mm Allen Bolts 
3	4	1/4" x 60mm Allen Bolts 
4	10	1/4" x 12mm Spring Washers 
5	10	1/4" x 19mm Flat Washers 
6	1	Allen Wrench 
7	6	4 x 45mm Wood Screws 

CODE	QTY	COMPONENTS	CODE	QTY	COMPONENTS
A	1	Chair Back 	B	1	Seat 
C	1	Left Front Leg 	D	1	Right Front Leg 
E	1	Left Stretcher 	F	1	Right Stretcher 
			G	1	Front Stretcher 

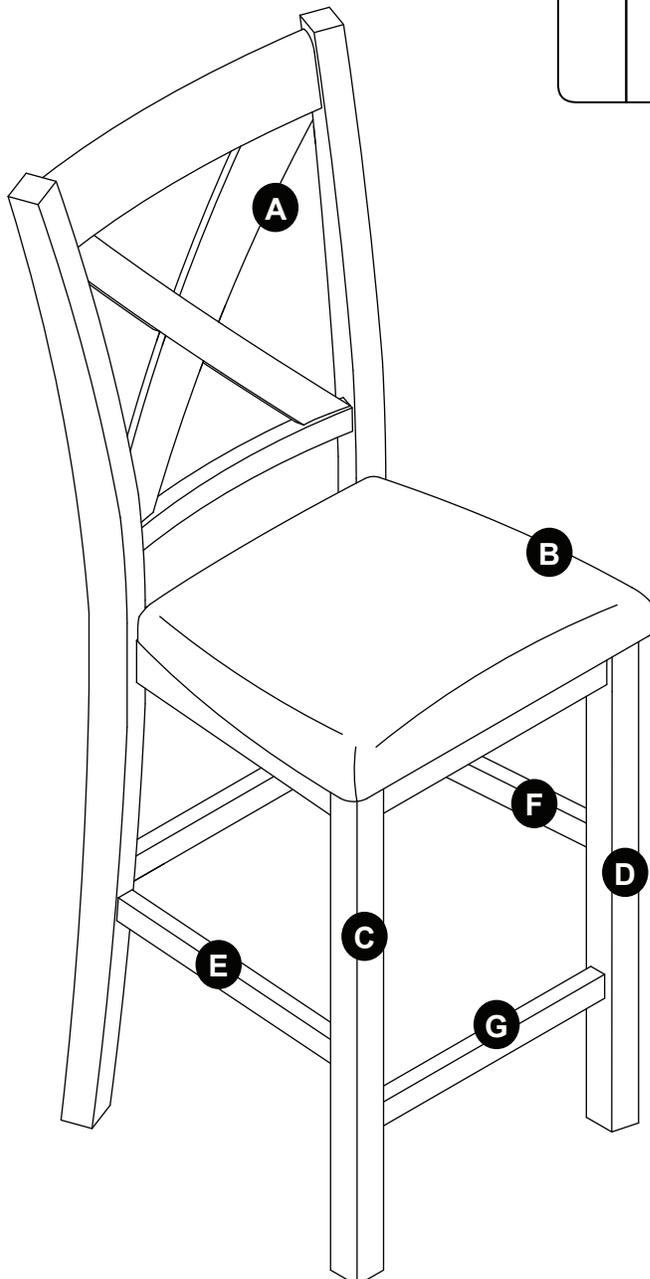

WARNING

- Do not let any sharp objects touch or rub the surface of the product.
- When assembling, do not let children play around the working area.
- Please confirm all parts are correct before starting the assembly process.
- Do not tighten all bolts and screws completely until the entire unit has been assembled and set up.
- Be careful if using power tools as they can over tighten screws and strip threads.

CARE & MAINTENANCE: The touch of a soft cloth is all the maintenance the finish will ever need. Please do not use harsh or abrasive cleaners for polishing, as they may cause damage to the finish. Periodic checks are recommended to make sure that all hardware is securely tightened.

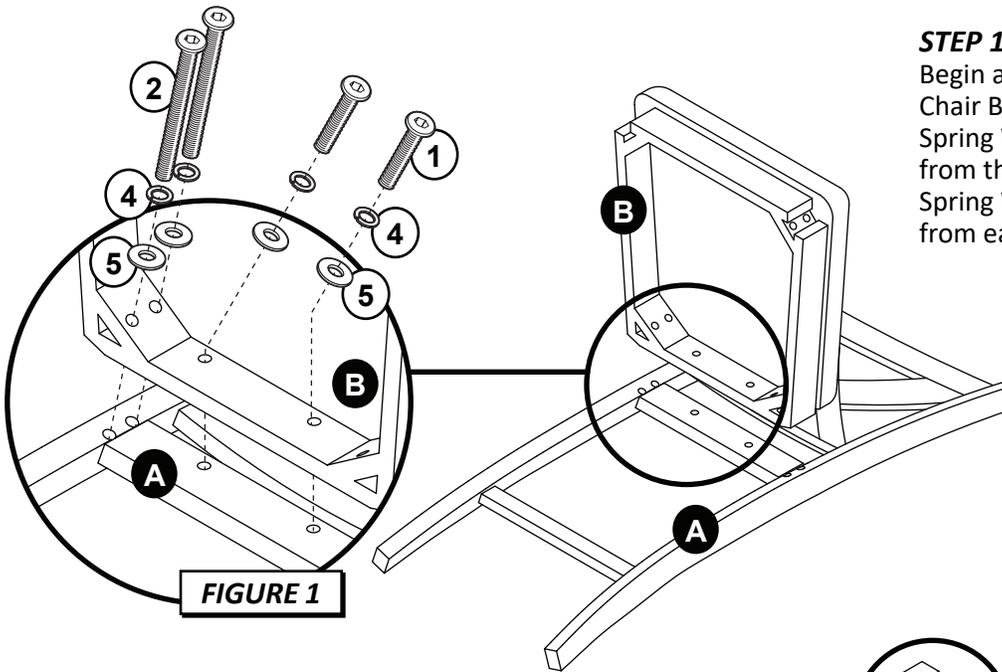


FIGURE 1

STEP 1 - Figure 1

Begin assembly by attaching Seat (B) to Chair Back (A) using 2 Allen Bolts (1), 2 Spring Washers (4) and 2 Flat Washers (5) from the center and 2 Allen Bolts (2), 2 Spring Washers (4) and 2 Flat Washers (5) from each side.

STEP 2 - Figure 2

Attach Left and Right Stretchers (E & F) to Chair Back (A). Attach Front Stretcher (G) in between Front Legs (C & D). Attach Front Legs (C & D) to Left & Right Stretchers (E & F). Secure Front Legs (C & D) to Chair Back using 2 Allen Bolts (3), 2 Spring Washers (4) and 2 Flat Washers (5) per leg. Tighten all bolts with Allen Wrench (6) provided.

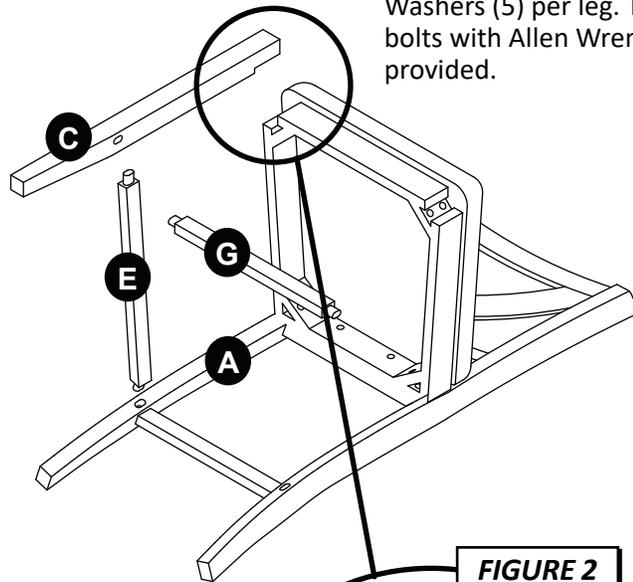


FIGURE 2

STEP 3 - Figure 3

Secure Stretchers (E, F & G) to Chair Back (A) and Front Legs (C & D) using Wood Screws (7). Tighten screws using Philips head screwdriver (not included).

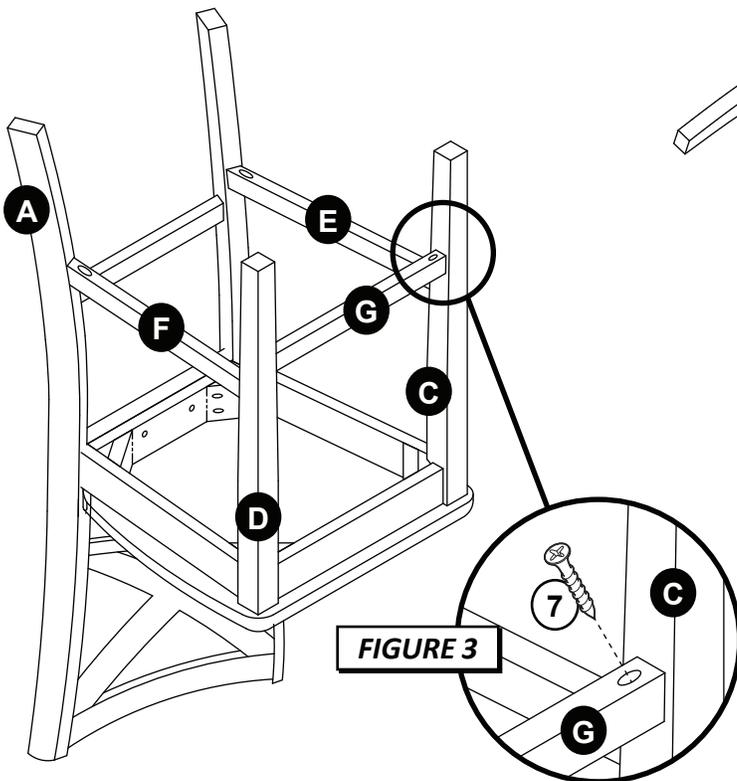


FIGURE 3