



Underscore®

6' Vibracoustic® Bath with Bask™ Heated Surface and Chromatherapy

K-1835-VBCW

Features

- VibrAcoustic calms and soothes with sound vibration technology.
- Six concealed speakers send sound waves through the water to gently massage the body.
- Four original instrumental compositions offer different levels of relaxation.
- Plug in your smart phone, tablet, or MP3 player via auxiliary-in cable. Add your own receiver to stream wirelessly via Bluetooth®.
- Customize your experience with the high-resolution color touch screen.
- Fully adjustable volume above and below the water.
- Functions as a hydrotherapy bath when full of water and a stereo system when empty.
- Bask™ heated surface creates spa-like relaxation with soothing warmth on your back and neck.
- Three heat settings allow you to customize the surface temperature.
- Generous 6-foot length provides an incredibly spacious bathing area.
- Clearflo slotted overflow for deep soaking.
- *The BLUETOOTH® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Kohler Co. is under license. Other trademarks and trade names are those of their respective owners.
- 72" (1829 mm) x 36" (914 mm) x 23" (584 mm)

Material

- Acrylic

Hydrotherapy

- VibrAcoustic

Installation

- Drop-in or under-mount.



Codes/Standards











ASME A112.19.7/CSA B45.10
CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
UL 1795
CSA C22.2 No. 218.2

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes


Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™



Underscore® 6' Vibracoustic® Bath with Bask™ Heated Surface and Chromatherapy K-1835-VBCW

No change in measurements if connected
with required drain illustrated. (K-7272)

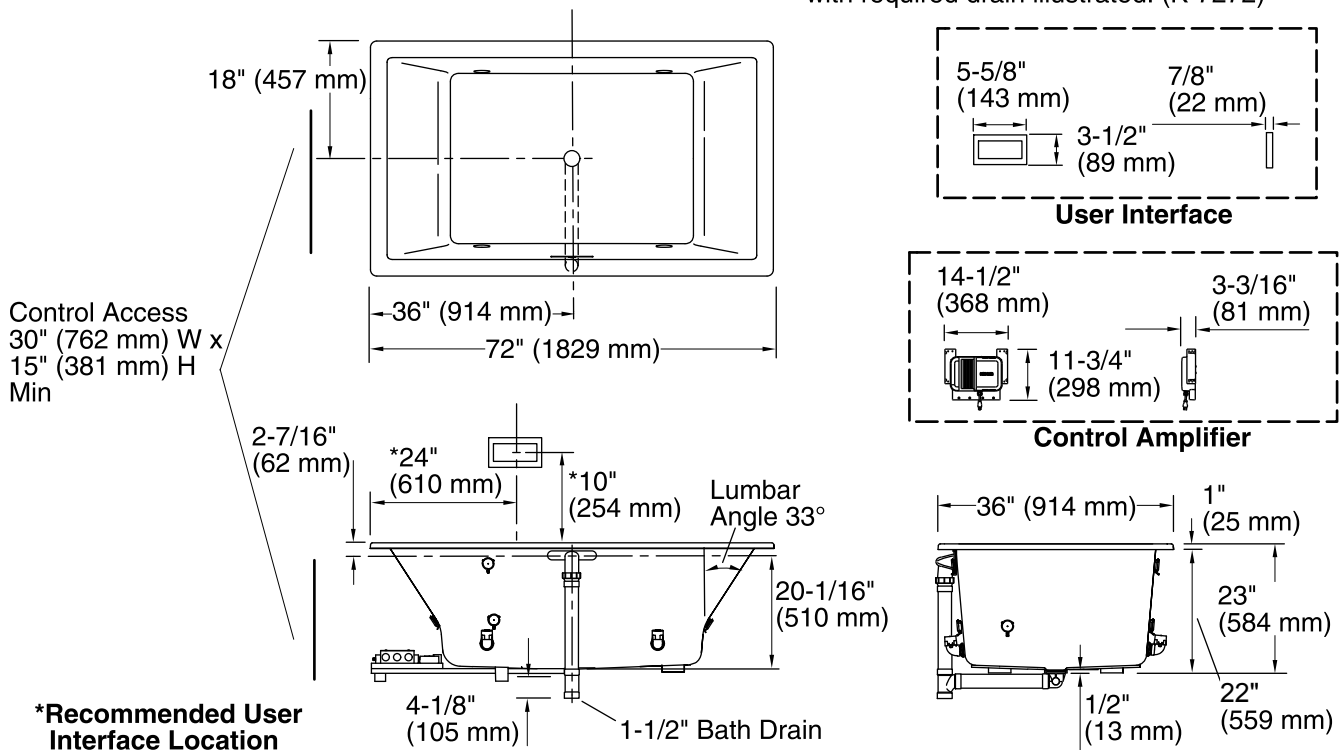

Required Electrical Service

One dedicated circuit required, protected with Class A
Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device
(RCD).

Amplifier, Heater: 120 V, 15 A, 50/60 Hz

Technical Information

All product dimensions are nominal.

Installation:	Drop-in/Undermount
Drain location:	Reversible
Basin area, bottom:	45-3/4" x 25-15/16" (1162 mm x 659 mm)
Basin area, top:	65-3/8" x 29-5/16" (1661 mm x 745 mm)
Weight:	92 lbs (41.7 kg)
Minimum floor load:	58.6 lbs/ft² (286.1 kg/m²)
Water depth:	19-7/16" (494 mm)
Water capacity:	112.9 gal (427.4 L)
Cutout:	Drop-in, 71-1/2" x 35-1/2" (1816 mm x 902 mm)
Under-mount kit:	K-593
Electrical rating:	Amplifier: 120 V, 50/60 Hz Heater: 120 V, 60 Hz, 65 W

Notes

Install this product according to the installation
guide. Ensure that the bath, user interface,
amplifier, and transducers are functional before
completing the installation.

Control amplifier fits 16" (406 mm) center studs.
25' (7.6 m) cables are included.

Locate the bath within 24" (610 mm) of a
GFCI-protected 120 V, 15 A grounded electrical
outlet. A second grounded outlet within the wall
framing must be within 24" (610 mm) of the
planned control amplifier. One electrical service
may be used for the entire bath and related
electrical components.

Hot water supply should be 70% of capacity or
greater. Installations will vary.