




OPERATIONS MANUAL



Instruction

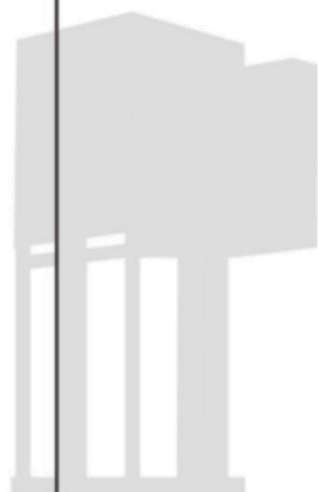

Where to Place Your Outdoor Wall Lights

If you have one light next to your entryway or garage door, then it should be $\frac{1}{3}$ of the height of the door. If you will be placing one light on each side of the door, then the lights should be $\frac{1}{4}$ of the height of the door. To do this, measure from the floor to the top of your door, then divide by 4 for two lights or 3 for one light. For example, if your door is 80" tall, divide by 4, and buy two lights that are each 20" tall. The lights should also be placed 66" from the floor or ground to properly illuminate the lock and handle. Lights should also be placed 6" from the edge of the door. If you choose to have only one light, make sure it is placed on the side of the door closest to the door handle.

What should I do if the glass lampshade I received is cracked or broken?

We understand that receiving a damaged product can be disappointing. If you find that your glass lampshade is cracked, broken, or otherwise not in perfect condition, please contact us immediately. Our customer service team is dedicated to providing you with the best possible solution and ensuring your satisfaction.

Dear Customer :

Thank you for choosing us!


We appreciate your business. Should you have any questions or encounter any issues, please don't hesitate to contact us. Our team is dedicated to ensuring your complete satisfaction with your purchase. We value your feedback, as it helps future customers in making informed decisions. We encourage you to share your experience by leaving a brief product review on the platform where you made the purchase. Once again, thank you for choosing us!

Best regards!

[Support Team]

Warning: California Residents Proposition 65
This product contains lead, a chemical known to
the state of California to cause cancer and birth
defects or other reproductive harm. Do not place
the product in your mouth. Wash your hands after
handling this product.

Caution: It is highly recommended to get an electrician to install this light. Please make sure to turn the electricity off at the main circuit breaker before beginning installation. All glass is fragile. Use care when handling glass component(s) and/or lamp(s).

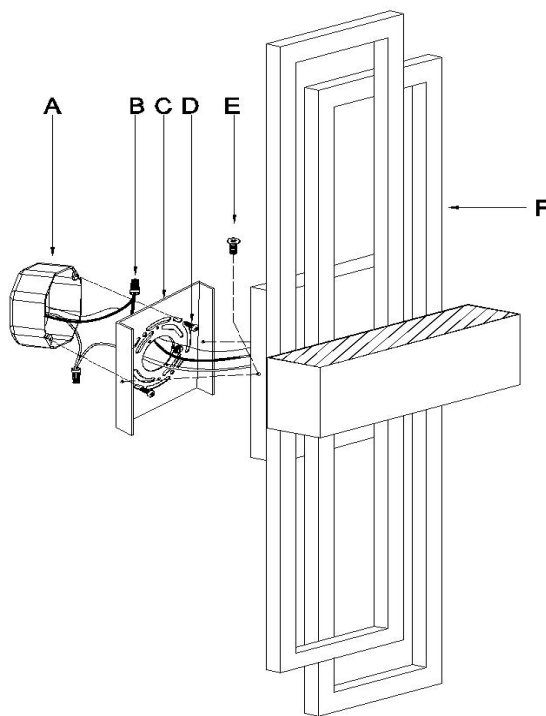

The built-in LED light source does not require a separate bulb


Drawing 1

After securing fixture to the wall it is recommended that the gap between the wall and the fixture backplate be sealed on the top and both sides, with a good quality waterproof caulk or silicone sealant (NOT INCLUDED)-see Drawing 1.



Wires meeting safety standards are required to connect the electrical circuit.

CAUTION: Risk of fire



Please read all instructions carefully. Before you proceed to install, make sure that the power supply is turned off and remains off until installation is completed.

PARTS INCLUDED

[illegible]

Installation Procedure:

Step 1:

Unscrew screw E from the lampbody
and remove the hanging plate C;

Step2: Install the hanging plate C
lock on the junction box A with screw D;

Step 3: Use terminal B The ground line and the input line are connected respectively;

Step 4: Lock the lamp body on the hanging plate C with screw E;
Installation completed.

