



PACKAGE CONTENTS

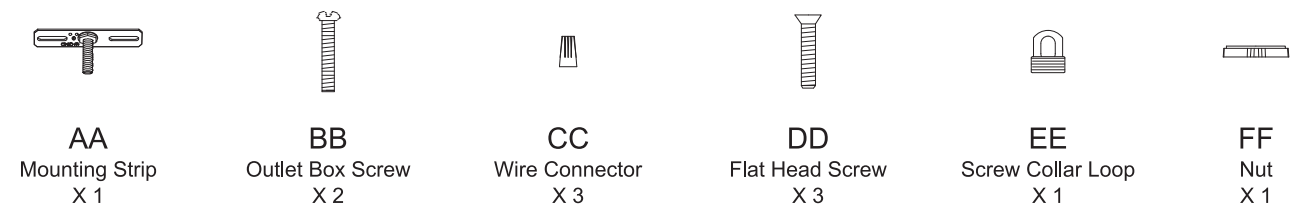

Use and Care Guide
HANGING LANTERN


PLANNING INSTALLATION

Read all instructions before assembly. Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box. To avoid damaging this product, assemble it on a soft, non-abrasive surface such as carpet or cardboard.

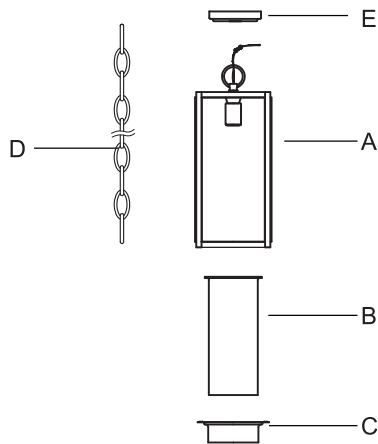


INSTALLATION

1. Place glass (B) through cover (C) until the glass sits on the cover (C) and then fasten the cover (C) to fixture body (A) using flat head screws (DD).

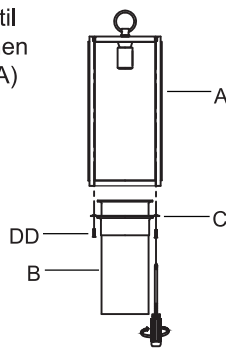


2. Unscrew nut (FF) from screw collar loop (EE). Unscrew the thread tube almost out of mounting strip (AA) to get enough length to attach the screw collar loop (EE) and nut (FF) on it to hold canopy (E) in place.




3. Attach mounting strip (AA) to outlet box (not included) using outlet box screws (BB).


Note: The threaded tube should protrude out from the outlet box.



4. Adjust chain (D) to desired length. Use pliers and screwdriver (not included) to twist open links at the two ends of the chain (D). Attach one end of chain (D) to fixture loop. Place the other end through the nut (FF) and canopy (E). Then attach to the screw collar loop (EE). Then close the link.

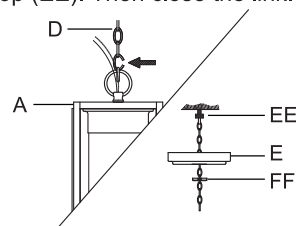


5. Weave electrical wires and ground wire up chain (D), through nut (FF), through canopy (E), through the screw collar loop (EE), through the threaded tube of mounting strip (AA) and into outlet box.

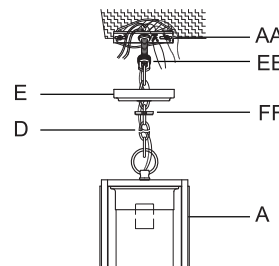


INSTALLATION(Continued)

6. Strip 3/4 in. of insulation from wire end. Twist stripped ends of the white, ribbed or tinned wire without writing from the fixture evenly against the white wire from the outlet box. Connect the black, smooth or un-tinned wire with writing from the fixture to the black wire from the outlet box in the same manner. Snip ends. Attach copper wire to ground wire. Helpful hint: if the outlet box doesn't have a ground wire, you can attach the ground wire from the fixture directly to the green screw on the mounting strip (AA).


Attach wire connectors (CC) to ends. Tape wire connectors (CC) and wires together with electrical tape (not included).

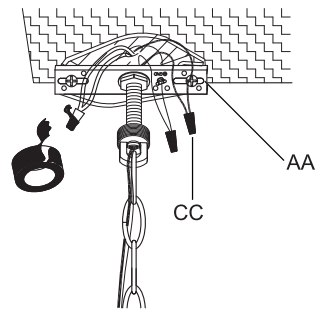

7. Attach the nut (FF) to screw collar loop (EE) and screw it until the canopy (E) is secured.

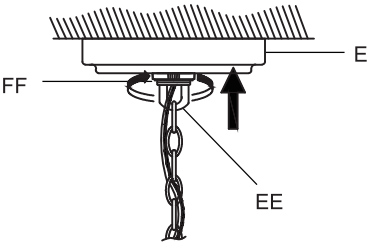

8. Install light bulb (not included). Use a 60-watt max. medium-base incandescent bulb or CFL or LED equivalent (not included).



Warranty

Safety Information



WARNING: Carefully read and understand the information given in this manual before beginning the assembly and installation. Failure to do so could lead to electric shock, fire or other injuries which could be hazardous or even fatal.



WARNING: Be sure the electricity to the wires you are working on is shut off. Either remove the fuse or turn the circuit off.

NOTICE: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.