


Assembly Instruction

CAUTION: Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.



Care and Cleaning

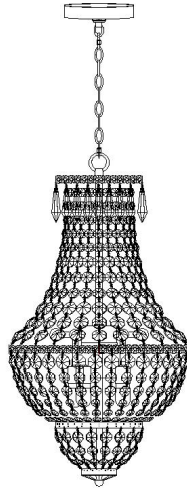















To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time: 30 minutes

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Mounting bar		1X	G	Dropper		18X	M	Bulb cover		4X
A1	Mounting screw		2X					N	Middle body Frame		1X
B	Canopy		1X	H	Crystal string		24X	O	Wire nut		1X
C	Lock		1X	I	Crystal string		18X				
D	Out ring		1X	J	Bottom body frame & tube		1X				
E	Chain		1X	K	Bulb		4X				
F	Top body frame & tube		1X	L	Crystal string		33X				

Installation

Step 1

Unpack all parts from cartons carefully

Screw the chain(E) to the lock(C) of the top body frame & tube(F)

Screw the top body frame & tube(F), the middle body frame(N) to the bottom body frame(J)


Place the bulb(K) to the socket then bulb cover(M)

Hang list:

Hang the crystal string(H) on the hole of the top body frame & tube and middle body frame(N)


Hang the crystal string(L) on the hole of the middle body frame(N) and the last second layer(J)

Hang the crystal string(I) on the hole of the last second layer and the last layer of the bottom body frame(J)


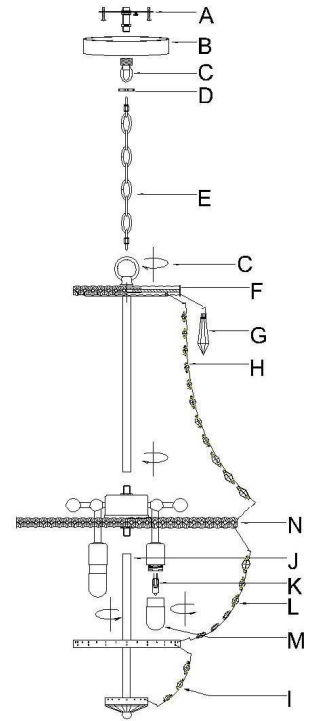


Step 2 Wire connection

Connect, Hot, Black or Red outlet Supply Wire to:	Connect, Neutral, White Outlet Supply Wire to:
Black	White
* Parallel Cord(round & smooth)	* Parallel Cord(square& ridged)
Clear, Brown, Gold or Black without Tracer(colored stripes)	Clear, Brown, Gold or Black without Tracer(colored stripes)
Insulated Wire(not green) with copper metal conductor	Insulated Wire(not green) with Silver metal conductor



*Note: When parallel wire(SPTI & SPT II) is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth. (See illustration on left.)



Step 3

Installing the mounting bar(A) with mounting screw1(A1), and secure canopy(B) with the lock (C) and tighten with out ring(D)

Step 4

Installing whole body to the lock(C)

Step 5

Consult a qualified electrician to ensure correct branch circuit conductor



ENJOY YOUR LAMP