

Product Features:

Extra thick LED light
Touch switch with memory
Touch switch dim function
Anti-fog pad

LED Mirror

Series:

LDJSBM2432SKSXXX

AB-C-4024R-U-001

Size:

W600XH800MM




W1000XH600MM

Series:

AB-C-C24-U-001

Size:

DIA600MM

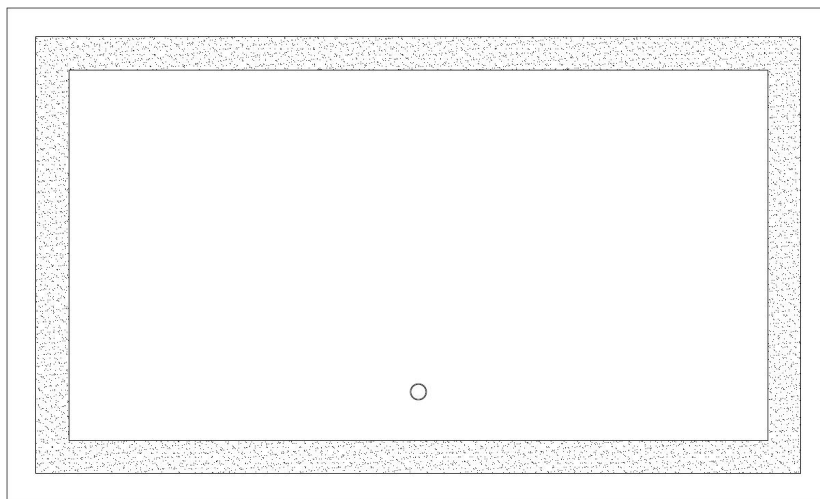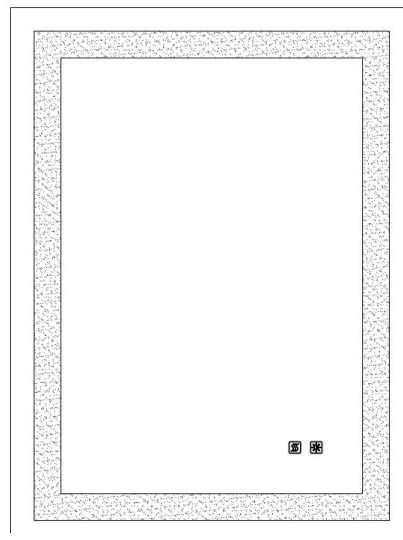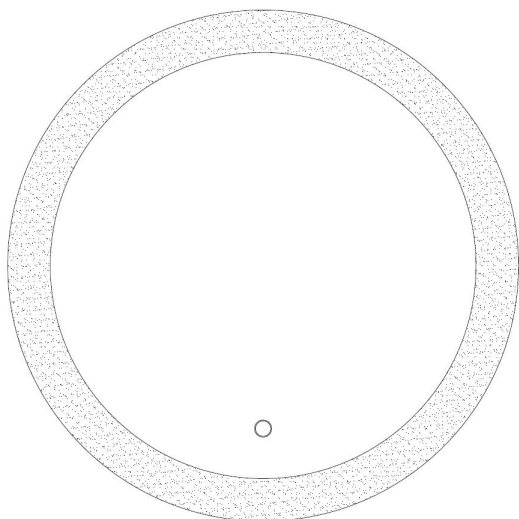

For easy and safe installation, please refer to the following:

Read all instructions thoroughly before installing the enclosed product.

Read and take note of all safety, care and maintenance information.

**PLEASE KEEP THIS INSTRUCTION MANUAL FOR FUTURE REFERENCE
DURING PRODUCT OPERATION AND MAINTENANCE.**



WARNING AND SAFETY INSTRUCTIONS

Before assembling your LED Lighted Mirror fixture, please make sure that you carefully read through this instruction sheet, refer back to them during installation to ensure your product is fitted safely and correctly. Keep these instructions for future use.

WARNING Risk of Fire and Electric Shock

- All fittings must be installed in accordance with current IEE wiring regulations. If in doubt, consult a qualified electrician.
- Switch off the electrical supply at the main circuit board BEFORE installation and maintenance.
- Suitable for indoor use only. This product should be positioned well away from curtains and fabrics. Never cover the mirror.
- Regularly check the cord, the transformer and all other parts for damage, if any part is damaged the product should not be used.

INSTALLATION SAFETY

- Inspect the product immediately upon receipt for the transit damage or missing parts. Handle the product with care and protect against knocks to all sides and edges of the glass.
- Ensure there are no hidden pipes or cables in the wall before drilling.
- Wear suitable eye protection when drilling. Take care if drilling on tiled surfaces in case the drill slips.

CAUTION

The light source of this product is non-changeable light diodes (LED). Do not disassemble the product, as the light diodes can cause damage to the eyes.


NOTE: The important safeguards and instructions that appear in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care are factors that can't be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture. Do not install this fixture in hazardous locations.

PRODUCT DESCRIPTION

CHECK PRODUCT LIST AFTER
OPENING THE PACKAGE

- LED Lighted Mirror
- Installation Manual
- Z-bar
- LDJSBM2432SKSXXXX-Wall Mounting Screws
- LDJSBM2432SKSXXXX-Drywall Anchor
- AB-C-4024R-U-001-Wall Mounting Screws
- AB-C-4024R-U-001-Drywall Anchor

- -1pcs
- -1pcs
- -1pcs
- -4pcs (One as a spare part)
- -4pcs (One as a spare part)
- -5pcs (One as a spare part)
- -5pcs (One as a spare part)

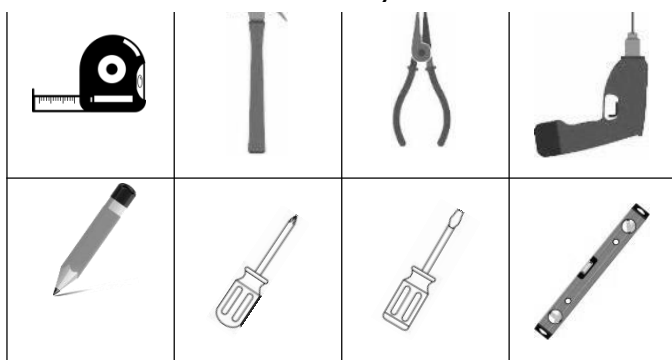

(TOOLS YOU MAY NEED)

Series:



LDJSBM2432SKSXXXXA

B-C-4024R-U-001

Size:

W600XH800MM


W1000XH600MM

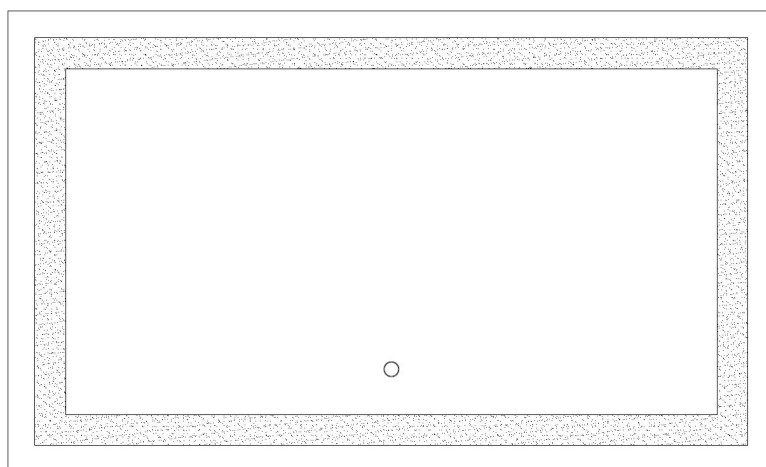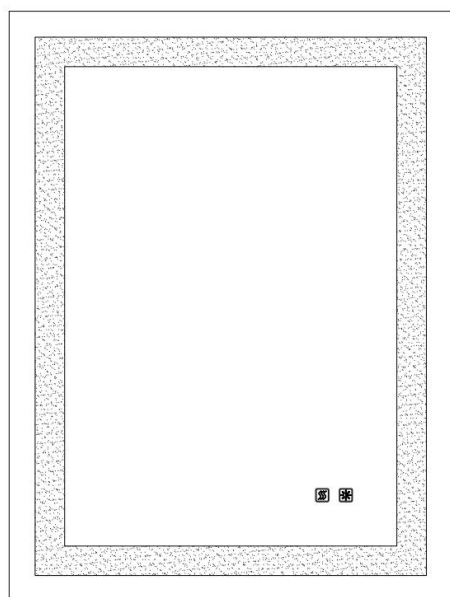


** All diagrams are for reference only. All model dimensions and proportions position will vary.*

PRODUCT DESCRIPTION & INFORMATION


Model: LDJSBM2432SKSXXXX

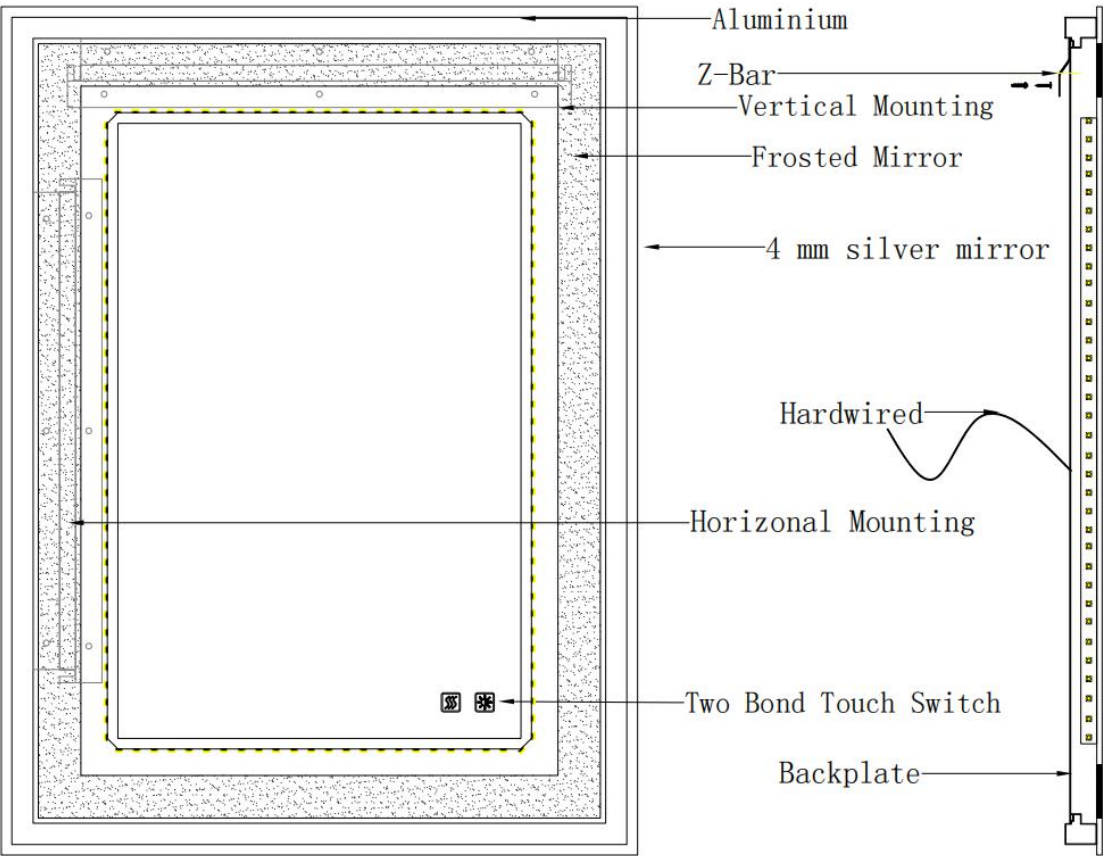

Model: AB-C-4024R-U-001

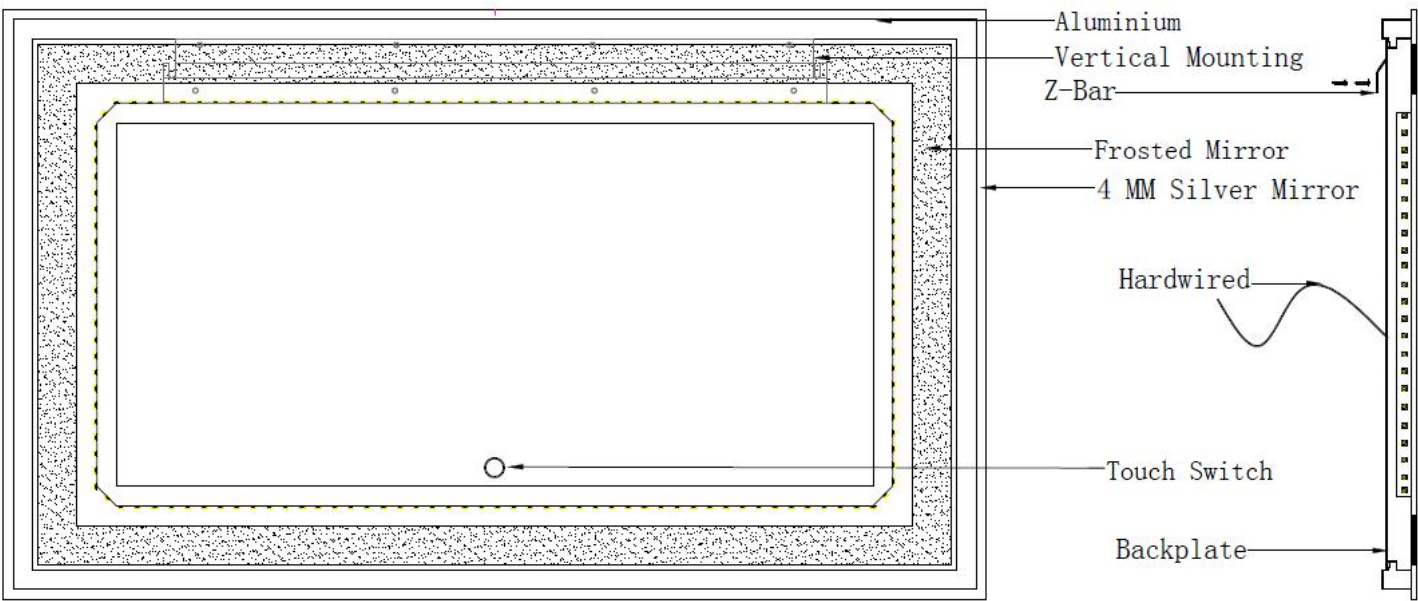

INSTALLATION PROCESS

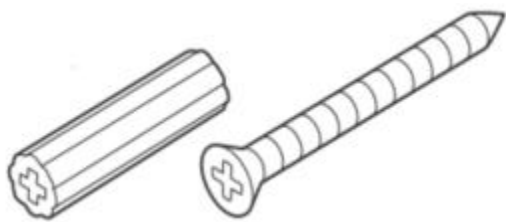

X4

(According to actual needs)


X4

(According to actual needs)



X1

(Z-bar)

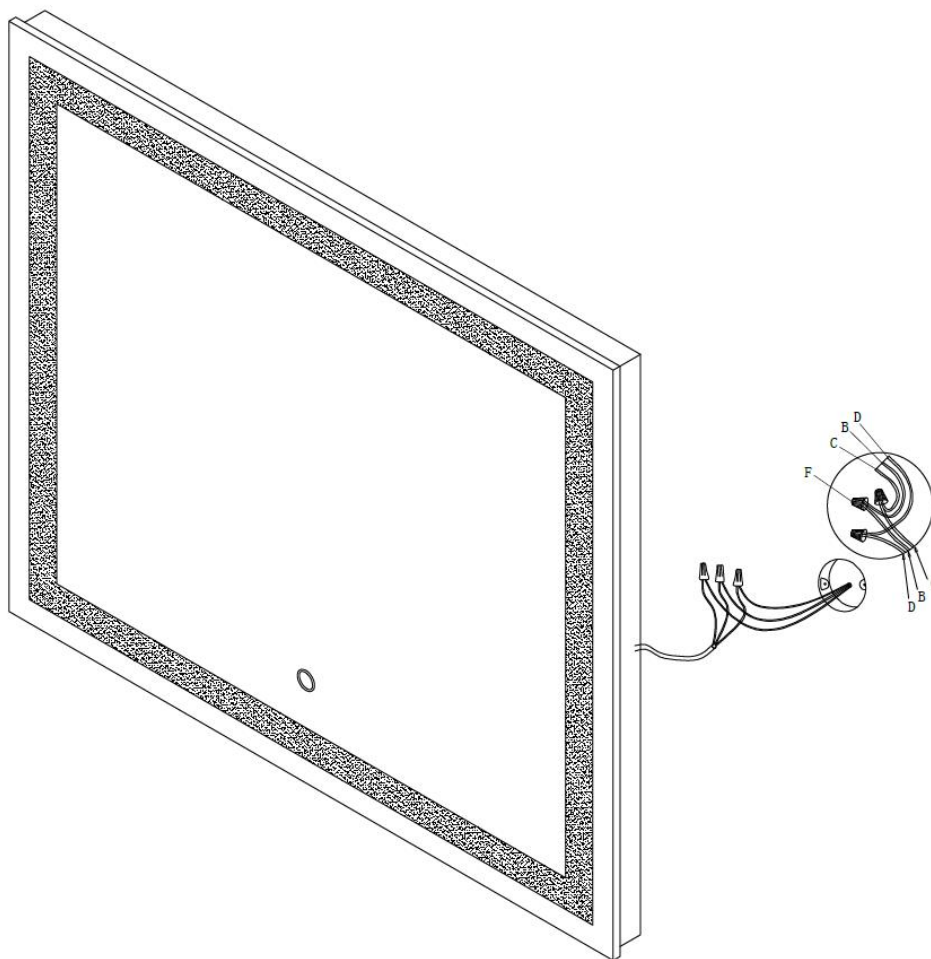

Warning: Always switch off the electrical supply at the mains during installation and maintenance.

Do not switch on the electrical supply at the mains until the end of the installation.

Step 1:

Use an I-Beam level to mount the included mounting bracket with 3 screws (Use anchor when it's installed on drywall, concrete or tile surface).

Step 2:

Make sure the circuit breaker for the power source of the mirror is off. Then connect the neutral (White), hot (black) and ground (copper wire or Green) wire between the mirror and the junction box.

Step 3:

Hang the mirror with desired placement by mirror Z-bar on to the mounting bracket.

PRODUCT DESCRIPTION

CHECK PRODUCT LIST AFTER
OPENING THE PACKAGE

- LED Lighted Mirror


- -1pcs
- Installation Manual

- -1pcs
- Z-bar

- -1pcs
- AB-C-C24-U-001-Wall Mounting Screws

- -4pcs (One as a spare part)
- AB-C-C24-U-001-Drywall Anchor

- -4pcs (One as a spare part)

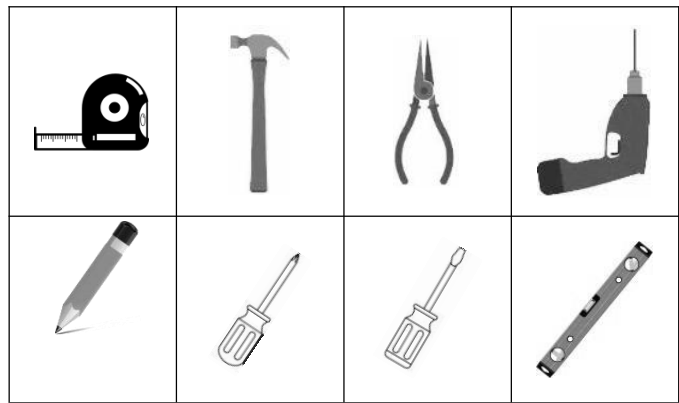


(TOOLS YOU MAY NEED)

Series:

AB-C-C24-U-001


Size:

DIA 600MM

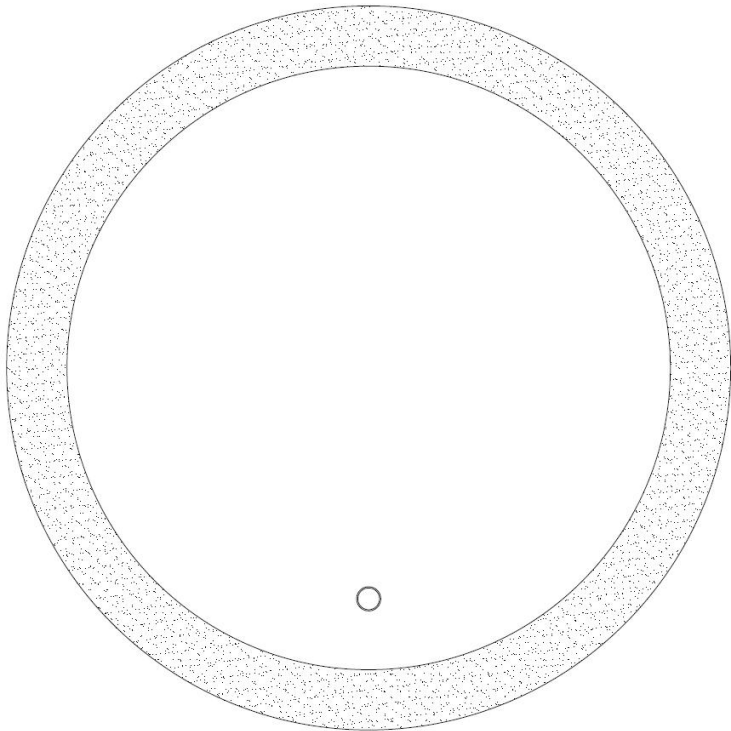


PRODUCT DESCRIPTION & INFORMATION

Model: AB-C-C24-U-001

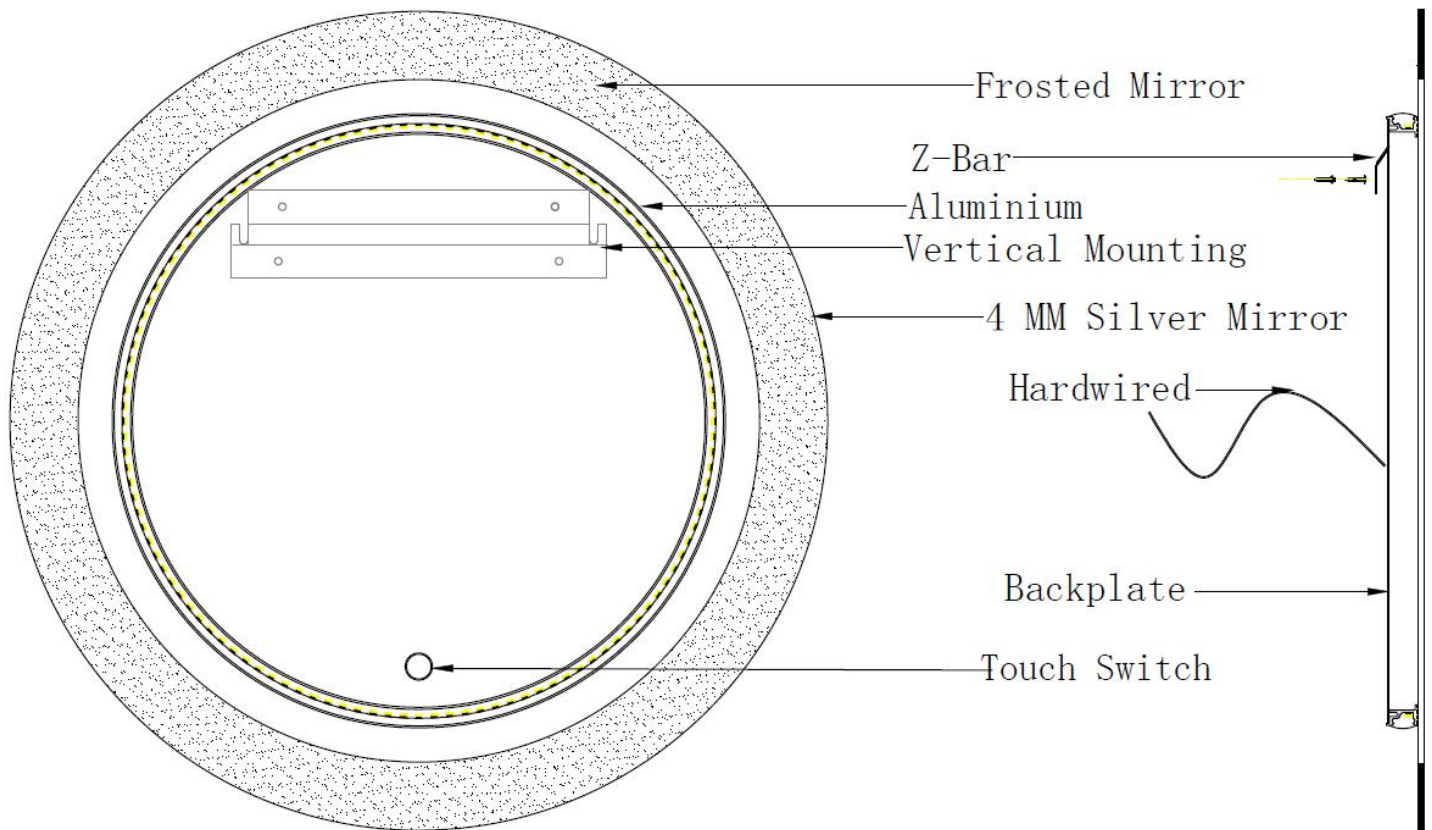

** All diagrams are for reference only. All model dimensions and proportions position will vary.*

INSTALLATION PROCESS

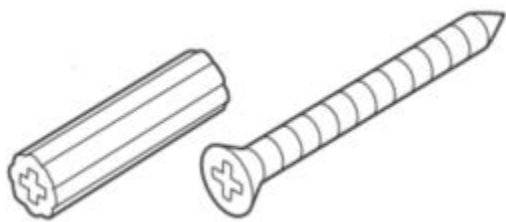

X4

(According to actual needs)


X4

(According to actual needs)



X1

(Z-bar)

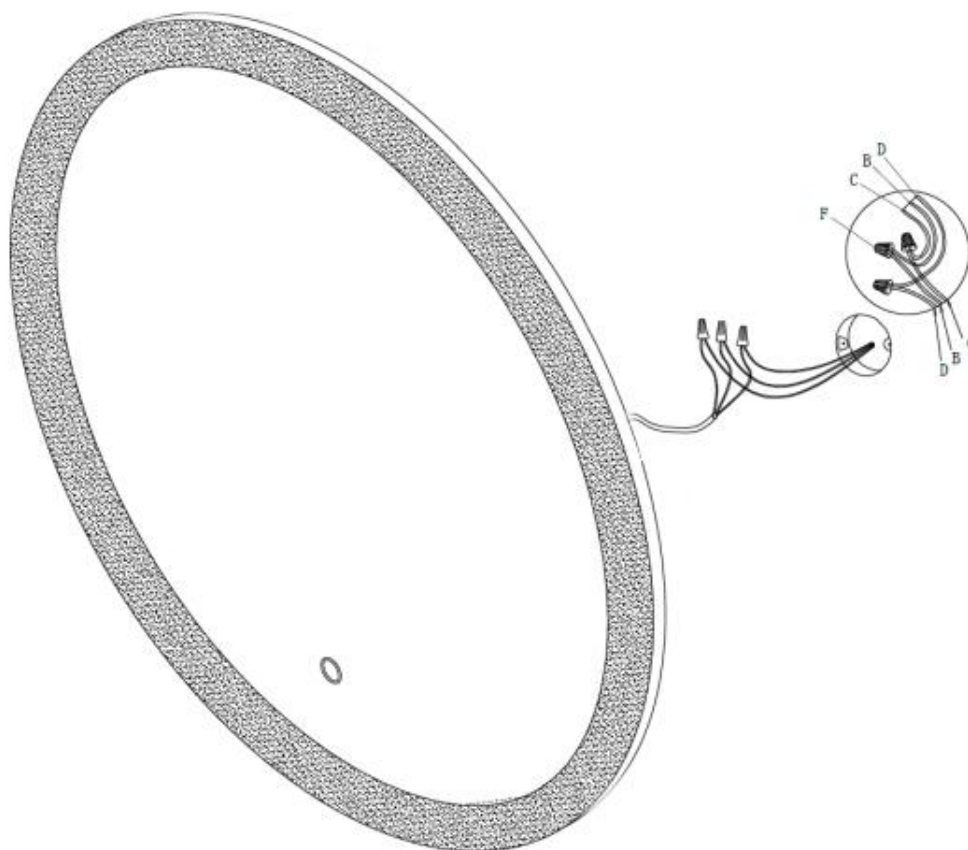

Warning: Always switch off the electrical supply at the mains during installation and maintenance.

Do not switch on the electrical supply at the mains until the end of the installation.

Step 1:

Use an I-Beam level to mount the included mounting bracket with 3 screws (Use anchor when it's installed on drywall, concrete or tile surface).

Step 2:

Make sure the circuit breaker for the power source of the mirror is off. Then connect the neutral (White), hot (black) and ground (copper wire or Green) wire between the mirror and the junction box.


Step 3:

Hang the mirror with desired placement by mirror Z-bar on to the mounting bracket.

Series:


AB-C-4024R-U-001

AB-C-C24-U-001

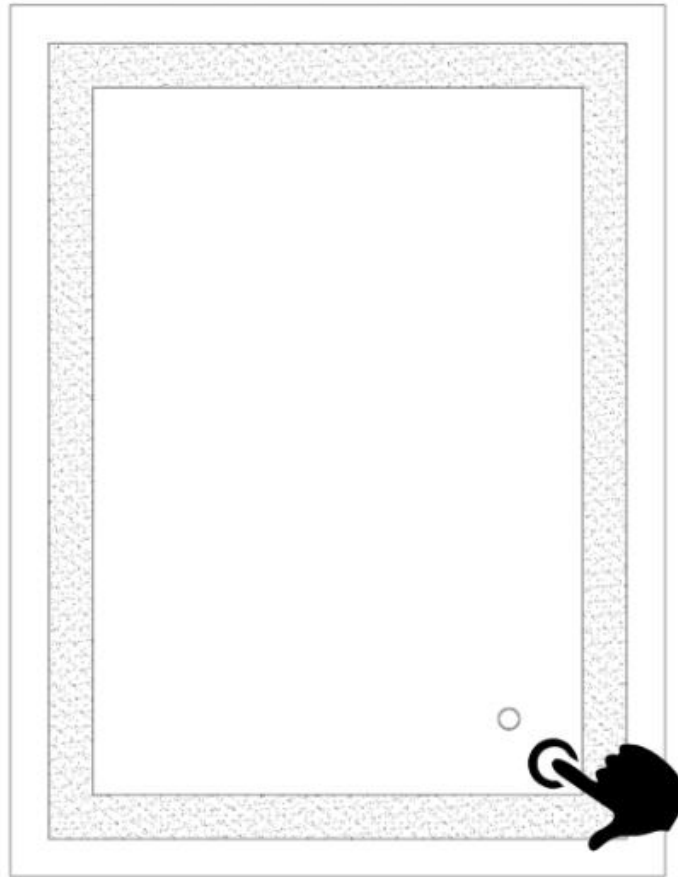

- ◆ Connect the power supply and touch the switch once to turn on the light.
- ◆ When the light is on, the anti-fog function is activated Automatically.
- ◆ Adjust the brightness of the light by long press the same switch.

** All diagrams are for reference only. All model dimensions and proportions position will vary.*

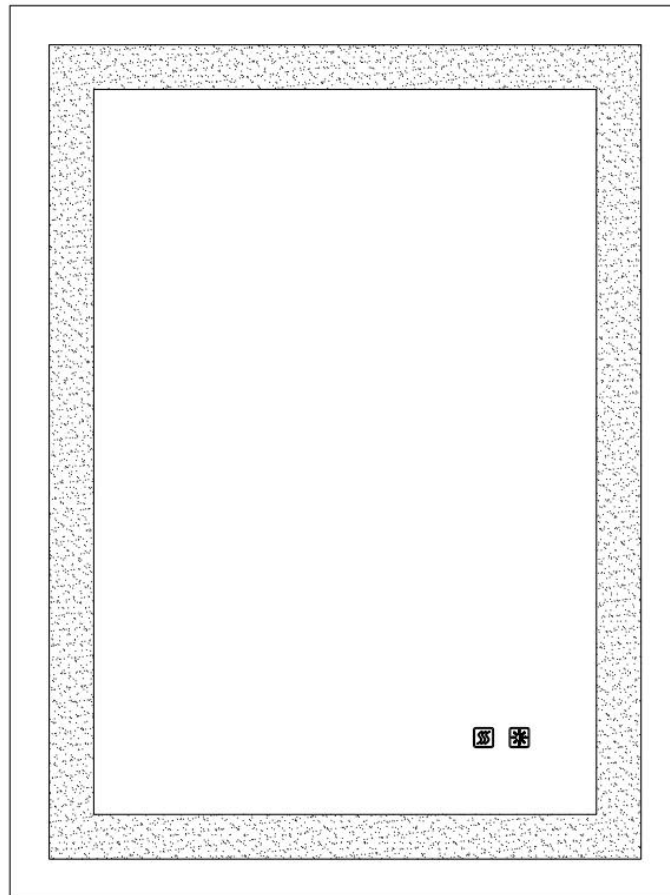**Button 1:**

First short press , anti-fog function works .
Second short press , anti-fog function stops .
The two operations loop in turn .


Button 2:

Gently press to change the color temperature.
First press causes the neutral light , it is mixed light by 3000K+6400K;
Second press causes the cool white light , it is 6400K ;
Third press causes the warm yellow light , it is 3000K .
The three operations loop in turn .

Scenario 1

(Wall Switch)


By doing so, the mirror is now bridged to the wall switch. In order to turn on the mirror, the wall switch needs to be on. The touch switch can be used to turn on the LED mirror and anti-fog pad. The mirror shuts down once the wall switch is flipped to OFF.

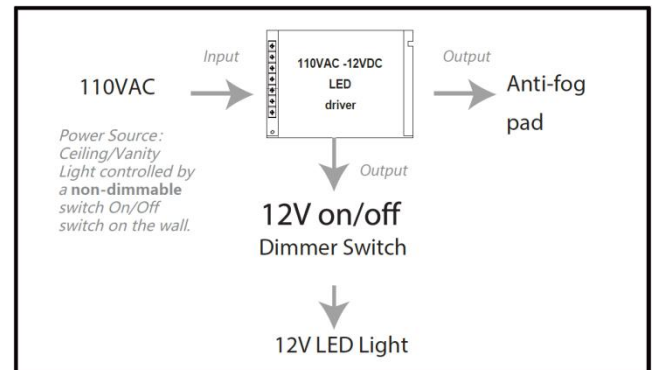

Scenario 2

(Wall Dimmer Switch – Not Accepted)

This is a scenario that is not acceptable. There is no work around for our mirror.

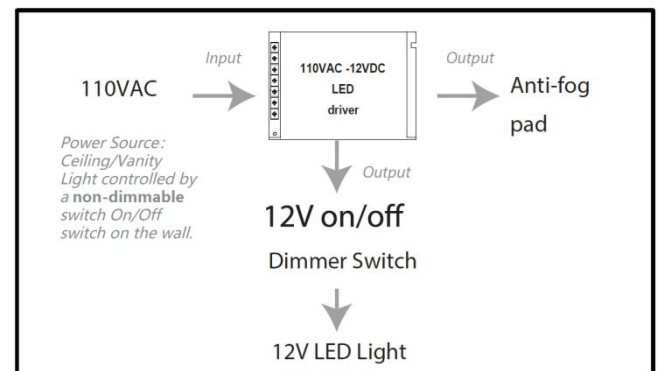

Do not try this way as it will damage the LED driver.

THANK YOU FOR CHOOSING US.

We wish you have wonderful experience in our product. If you have any queries, please feel free to contact us by email: lykings@outlook.com.

For more ESDIY products, please scan the following QR code.

