



San Raphael® | K-3597

One-piece elongated toilet, 1.0 gpf

Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design
- Elongated bowl offers added room and comfort
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- 1.0 gpf (3.8 lpf)
- Equipped with Sloan FLUSHMATE® Pressure Vessel
- Seat and lid included
- Pressure Lite® flushing technology provides commercial-grade flushing power while reducing water use
- Eligible for consumer rebates in some municipalities
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System



Sustainability



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

7-30-2026 01:27 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.
Accessibility standards may require controls to be located on the open side of the toilet.
Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.



ASME A112.19.2/CSA B45.1
EPA WaterSense®
California Energy Commission (CEC)
ADA
CSA B651
OBC

Warranty

See website for detailed warranty information.

KOHLER® Toilets and Seats Limited Warranty


Technical Information

Rough-in:	Standard 12" (305mm)
Flush Type:	Pressure Lite
Flush Rate:	1.0 gpf (3.8 lpf)
Bowl Shape:	Elongated
Seat-Mounting Holes:	5-1/2" (140 mm)
Waste Outlet:	Floor
Trapway Size:	2-1/8" (54 mm)
Trapway Type:	Exposed
Water Surface Size:	9" x 7" (229 mm x 178 mm)
Rim to Water Surface:	5-7/8" (149 mm)

Recommended Products/Accessories

1023457 Toilet Wax Ring And Hardware Kit
1265114 12" Toilet Supply Line
K-23726 Drain treatment
K-5420 Low-profile toilet bolt caps
K-4108 Elongated bidet toilet seat with remote control



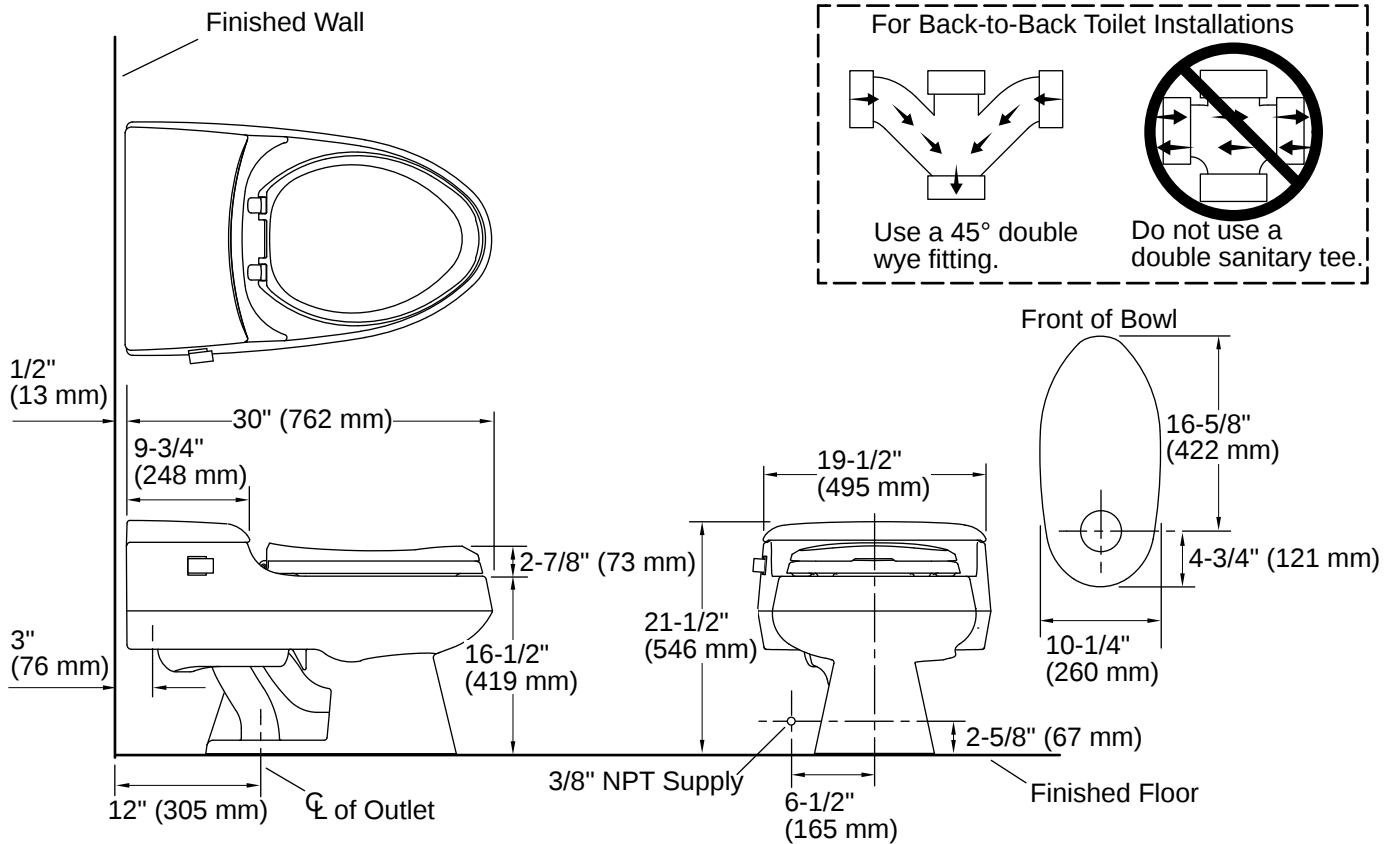

Installation

- Standard 12" (305 mm) rough-in
- Supply line sold separately

Installation Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

