


ASSEMBLY INSTRUCTIONS









CAR COVER

ASSEMBLY INSTRUCTIONS

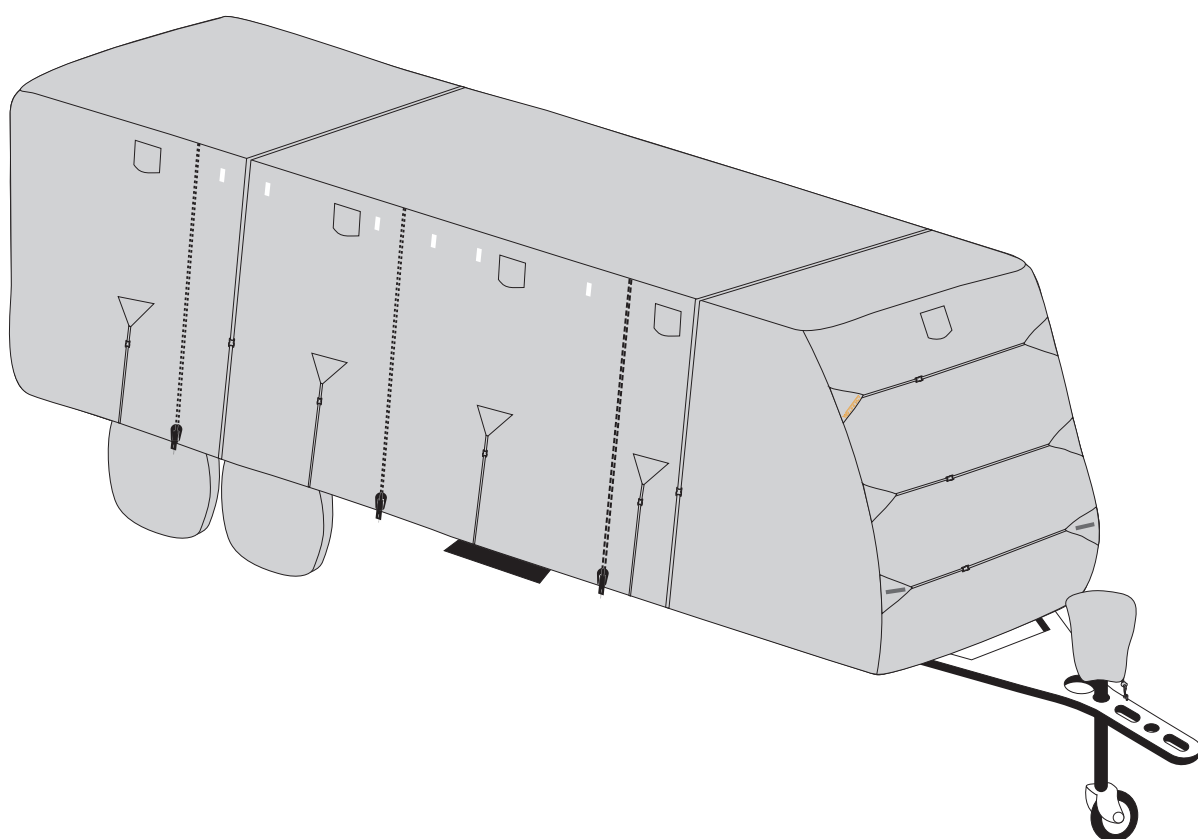

1. Three or more people are required for the assembly.
2. A ladder is recommended during assembly.
3. Ensure you have all the required parts and organize them before assembling.
4. Do not use candles, matches or open flames of any kind inside or near a tent.
5. Professional installation is highly recommended.

Item no.	Reference Image	Qty.	Item no.	Reference Image	Qty.
A		X1	D		X2
B		X4	E	 Spare parts	X2
C		X1	F		X6

WARNING

Always keep this item away from naked flames.

Never install on a windy day or when the roof is slippery or wet.

Do not run the RV engine with the cover on.

Do not install when the exhaust system and engine are hot.

Make sure all the electrical items inside your RV have been turned off before installing.

ASSEMBLY INSTRUCTIONS

1






Ⓐ 1pc




Ⓕ 6pcs

1. Locate the gutters (small extending spouts at the ends of your RV gutter) on the top corners of your RV and cover them with the gutter guards provided.




2. Place the cover on the roof. Make sure the corners of the cover at the corners of your trailer. Let the cover fall over the trailer.

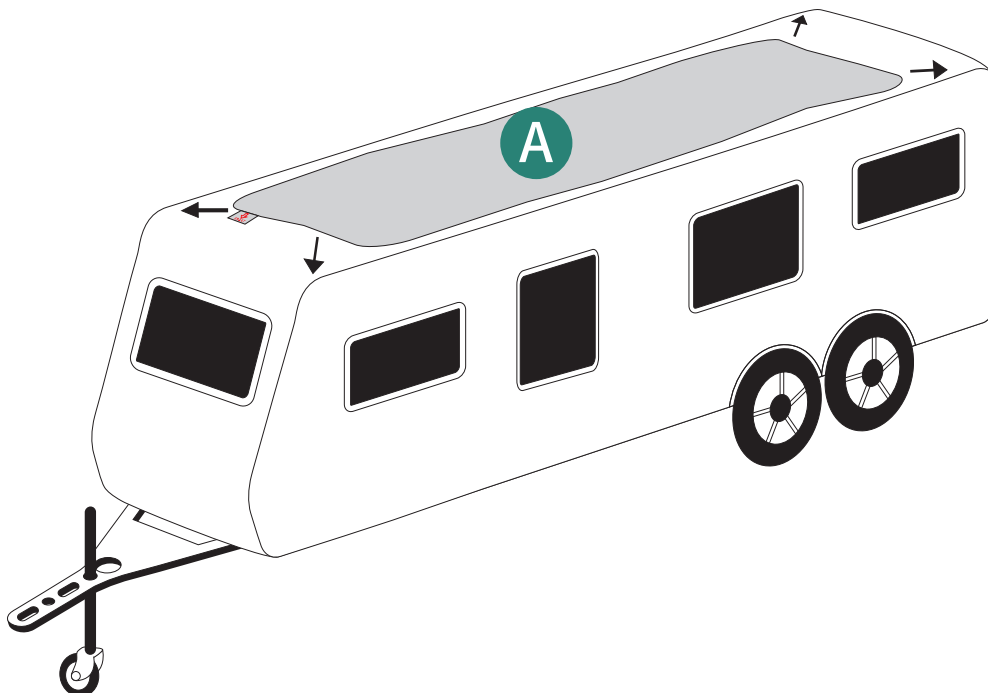


ASSEMBLY INSTRUCTIONS

2

3. Use a stepladder and work from front to back to pull the cover down and totally cover the trailer.

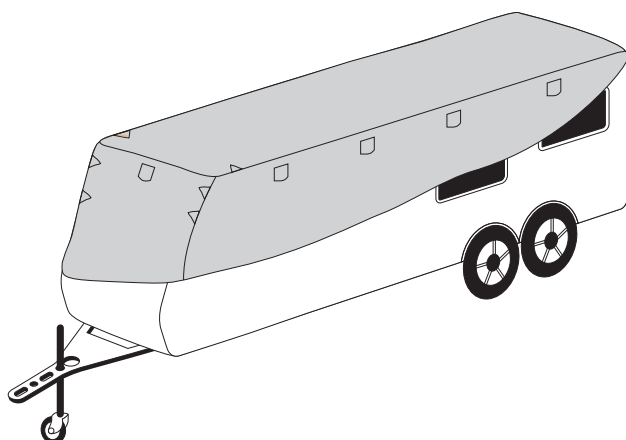


4. Zip up all the panels of the cover. Secure the zipper with hook and loop strips. Use towels to wrap sharp edges then pull the elasticized corners down over the bumpers of the trailer.

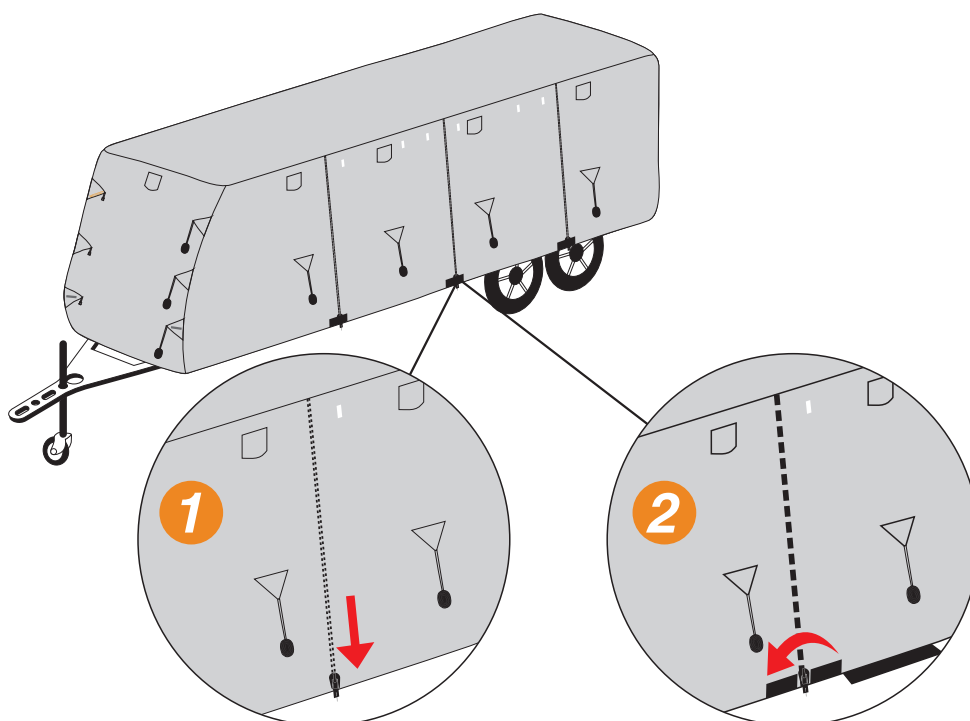


ASSEMBLY INSTRUCTIONS

3




ⓓ2pcs

5. Find out the triangle cloth pieces with straps. Throw the strap under the trailer and buckle the strap on the opposite side. Then adjust the strap. Don't over tighten-the straps should be snug, not drum tight. Repeat with the remaining straps.

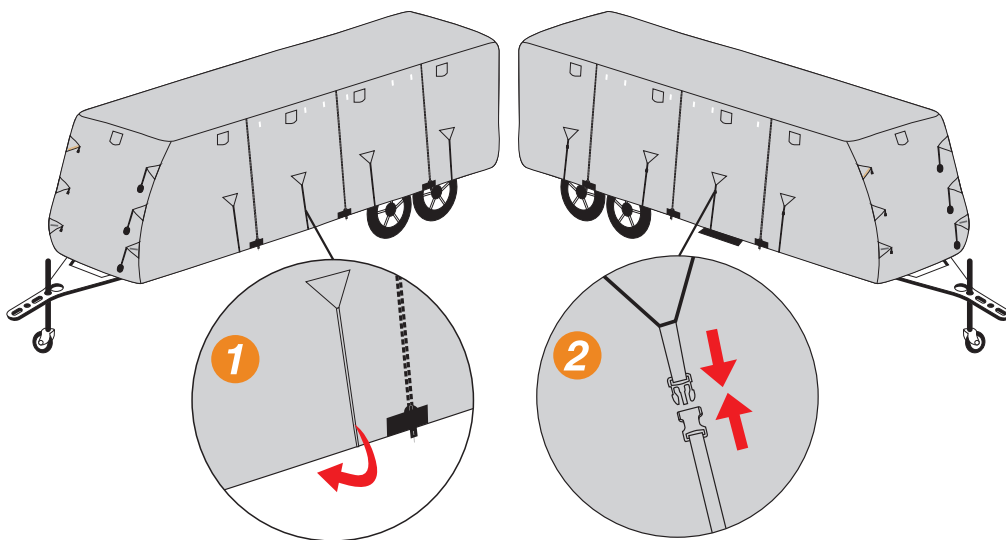


6. Use 2 lashing straps included to further secure the cover. Throw one side of the lashing strap over the trailer roof, then throw it back under the trailer. Buckle and adjust it. Repeat with another lashing strap.

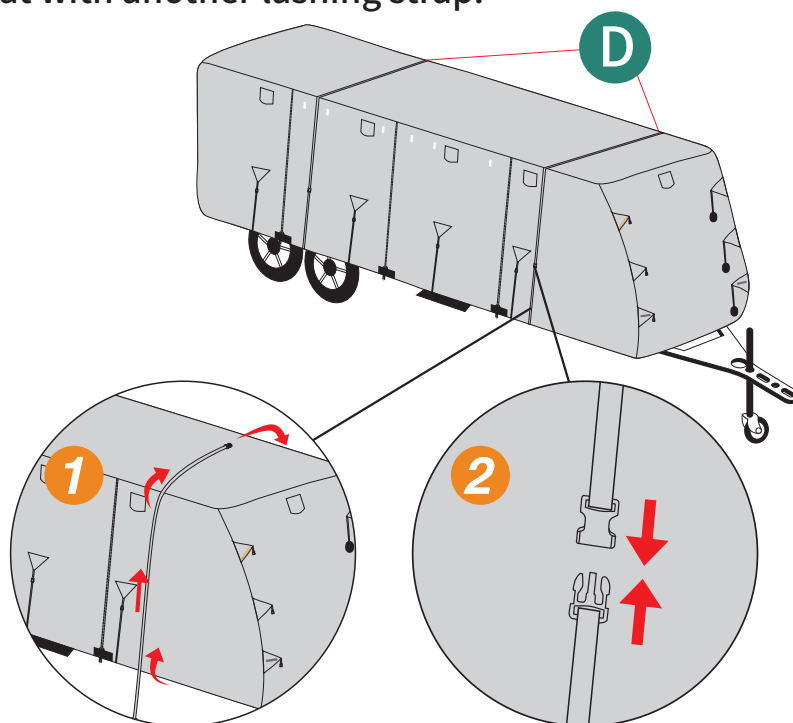


ASSEMBLY INSTRUCTIONS


4



7. Finish installation by buckling all straps in front and back of the trailer.

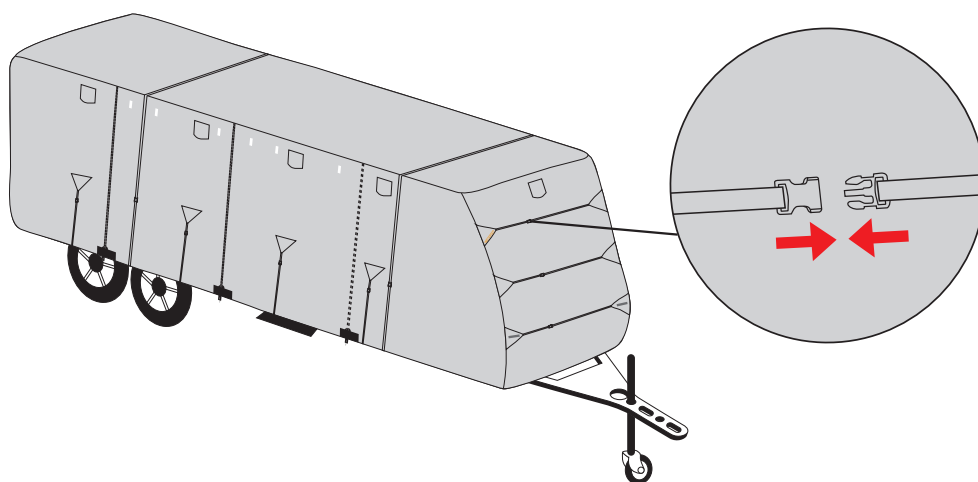


8. The silver side of the tire covers is on the outside. Pull the elastic band on the cover to the longest and cover the wheel from top to bottom. Adjust the cover to make the stitch coincide with the outer edge of the wheel. Buckle the strap. Repeat the same operation for the other tire covers.

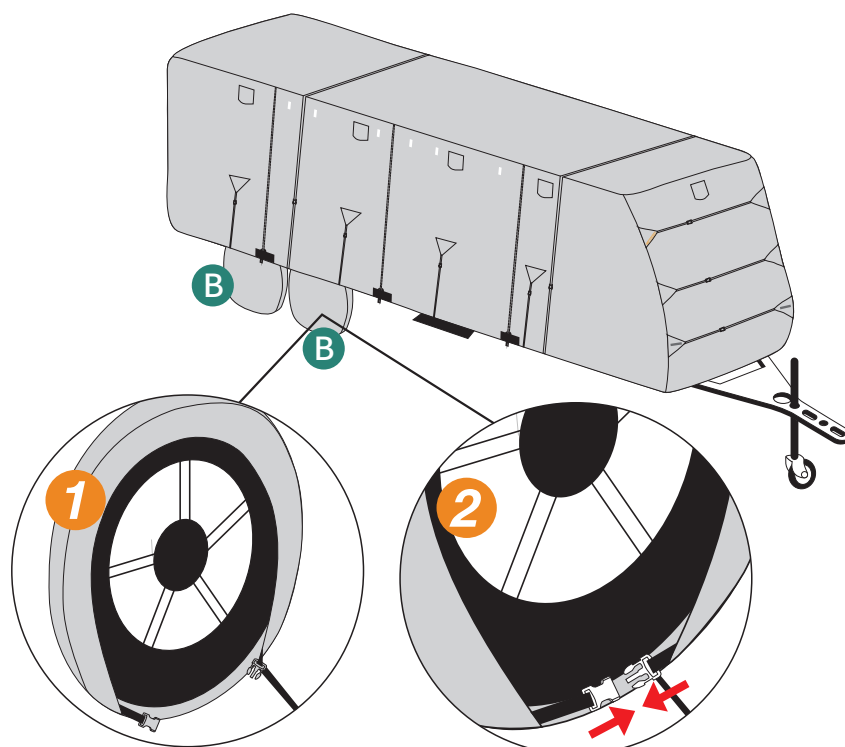

ASSEMBLY INSTRUCTIONS

5



©1pc

9. Put jack cover on the jack, bind the cable with hook and loop strip, tighten the mouth and hang chains on metal rings.

