




Product structure decomposition

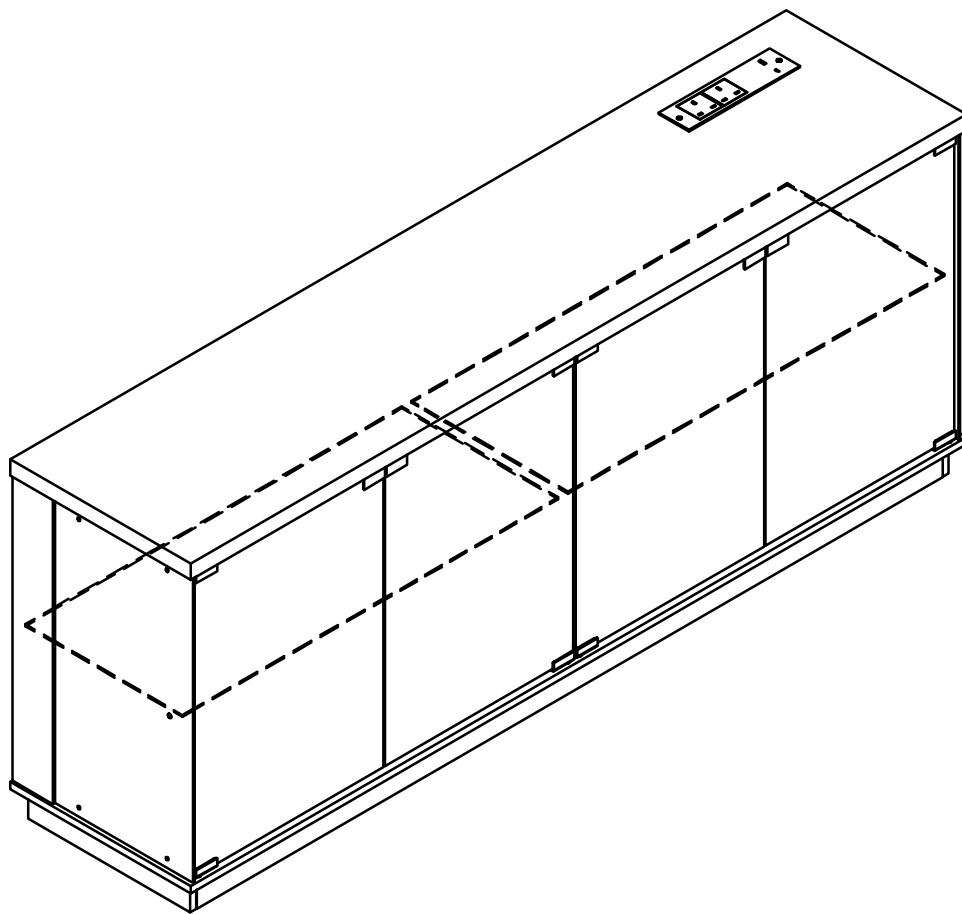


Product structure decomposition

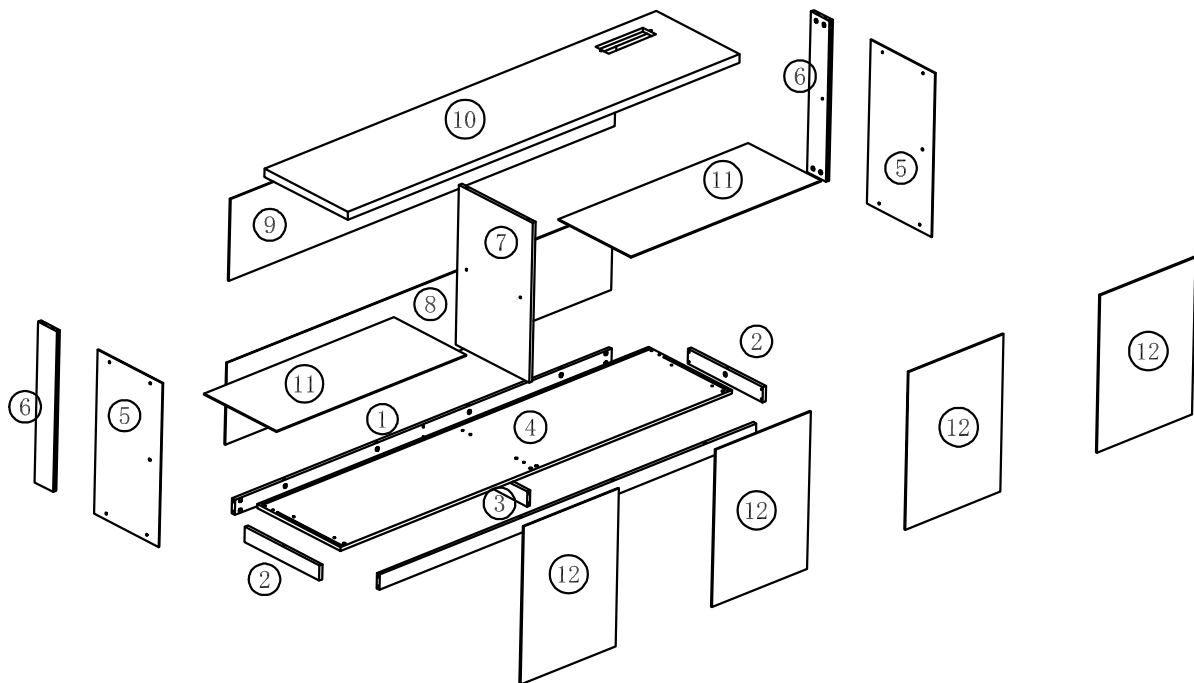


Product structure decomposition




1×2




2×2



3×1




4×1




5×2




6×2




7×1




8×1




9×1



10×1








11×2




12×4

Accessories list

A		Two In One Screw (6x28mm)	34pcs	
B		Two In One Nut (10x12mm)	34pcs	
C		Wood Chipping (6x30mm)	2pcs	
D		Foot rubber pad	6pcs	
E		corner brace fastener & gasket	8pcs	
F		Screw (M4x8)	8pcs	
G		shelf bracket & Screw M6X16mm	2-2-2pcs	
H		shelf bracke	6pcs	
J		Rebound device & Screw 3X16mm	2pcs 8pcs	
J		hinge	4-4pcs	
J		Iron sheet	4pcs	
K		backplate clip & Screw 3x16mm	16 pcs	
L		AC/DC Adapter 3.5X12mm	1pcs-4pcs	
M		wire clip	2pcs	
N	 x2 (3.5x14mm)  x2  x2 Anti Fall Hardware  x4  x2 (4x45mm)			1pcs
O		Screw 3.5X14mm	1pcs	
 1pcs   Double head screwdriver use as required				


Use parts ① and ②

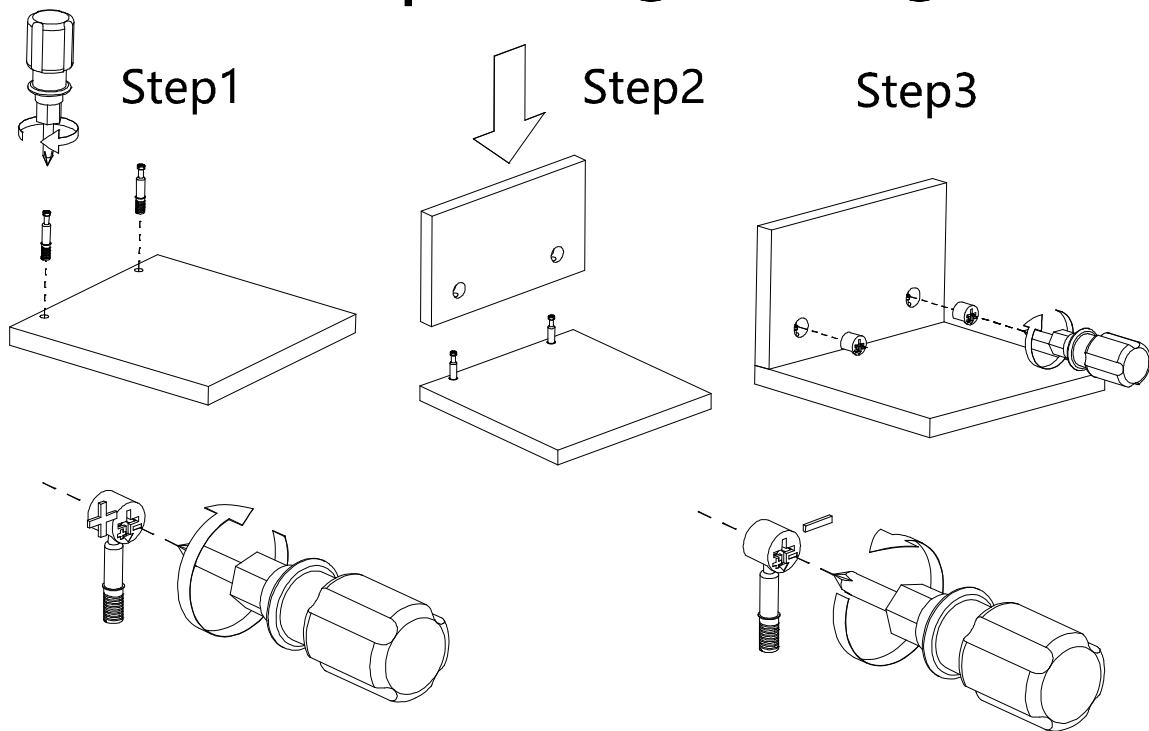


Step1


Code	Diagram	count
A		4

The installation needs to be repeated twice

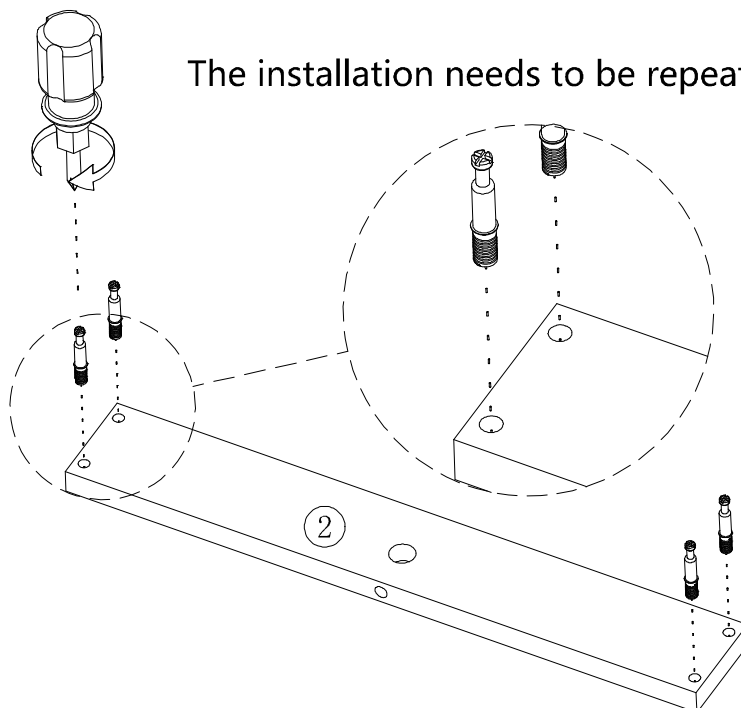


Step2

code	Diagram	count
A		2

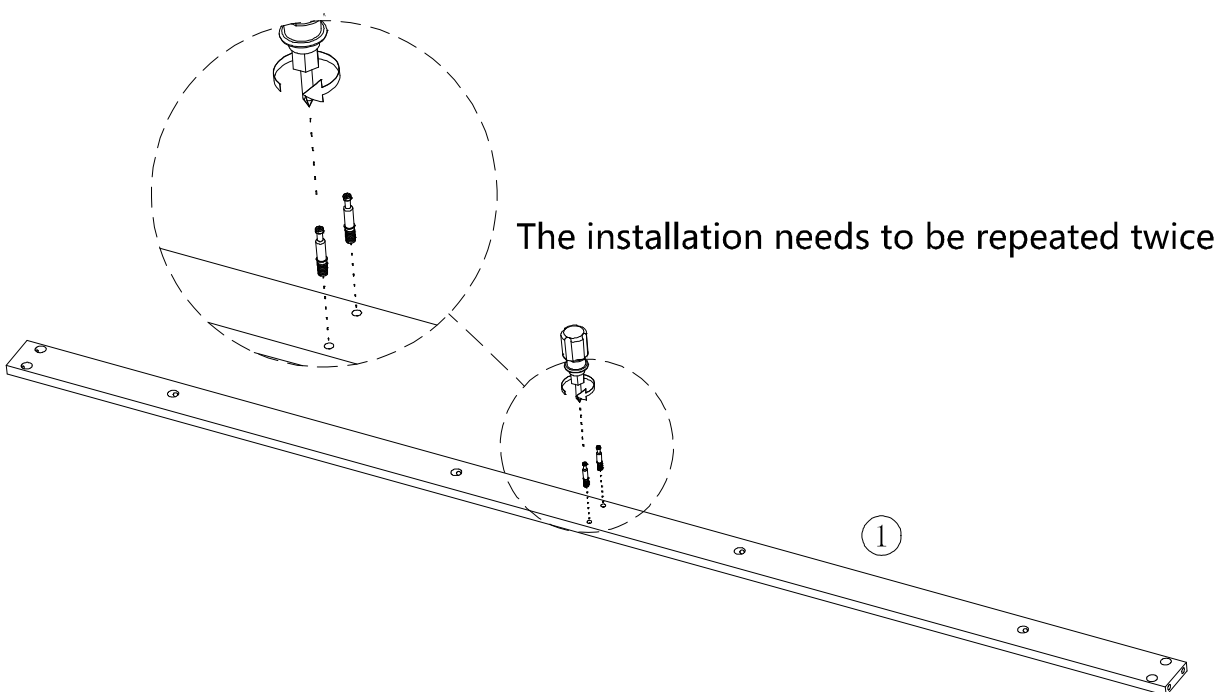


Step3

code	Diagram	count
B		4

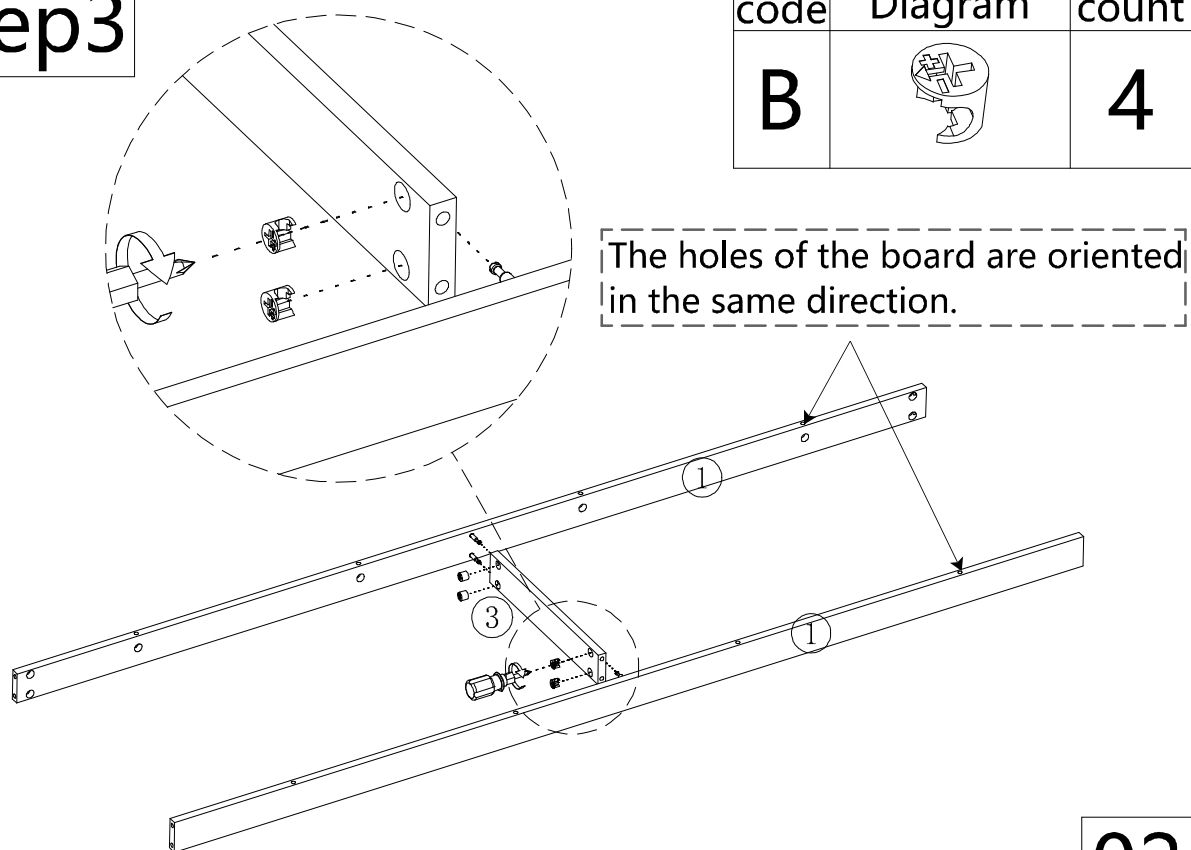


Step4

code	Diagram	count
B		8

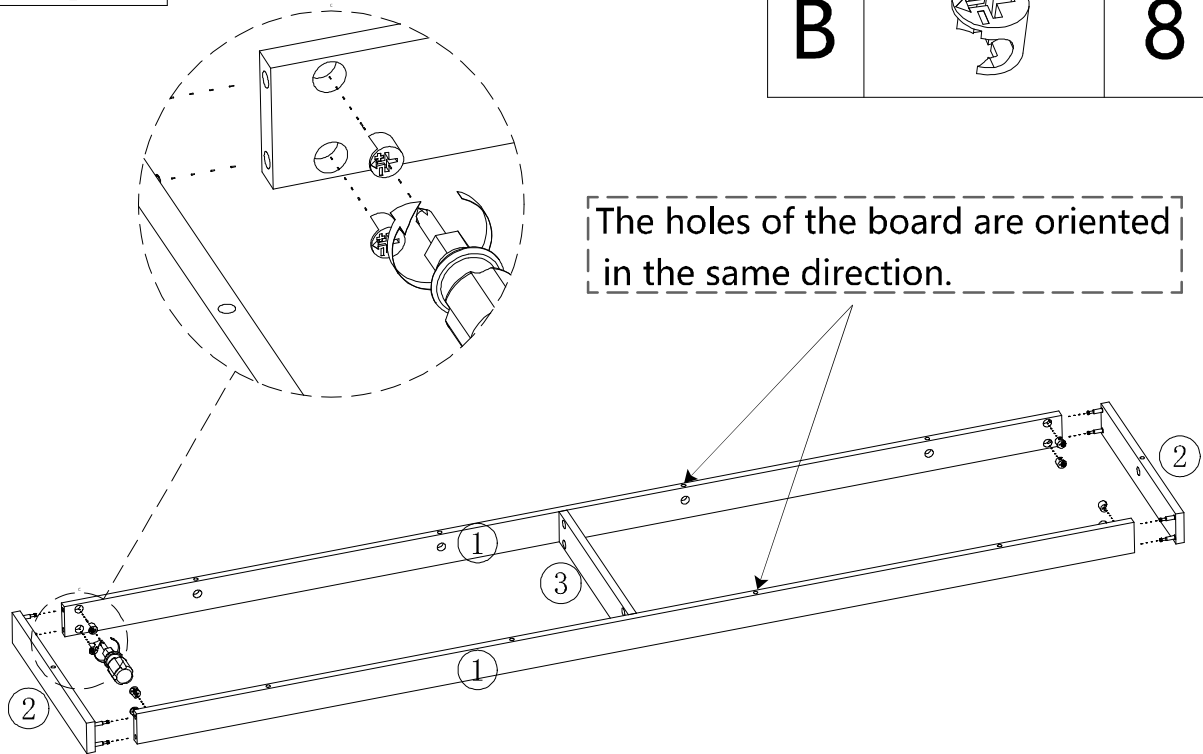


Step5

code	Diagram	count
A		10

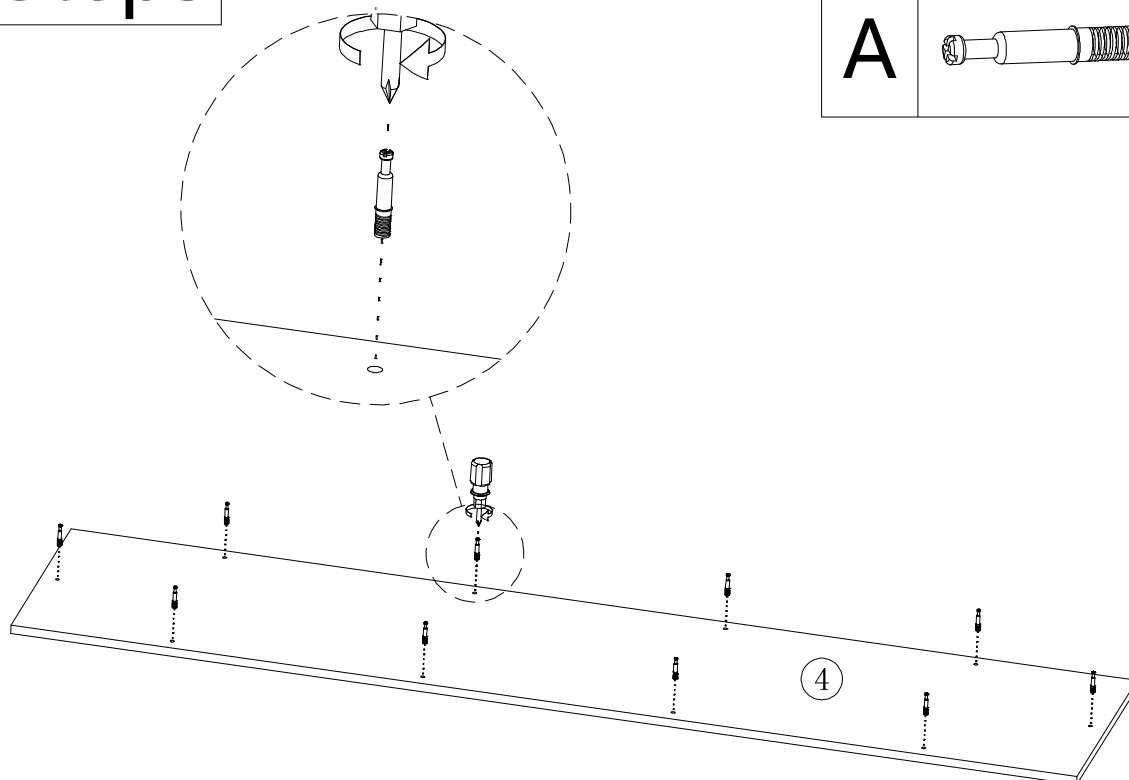


03

Step6

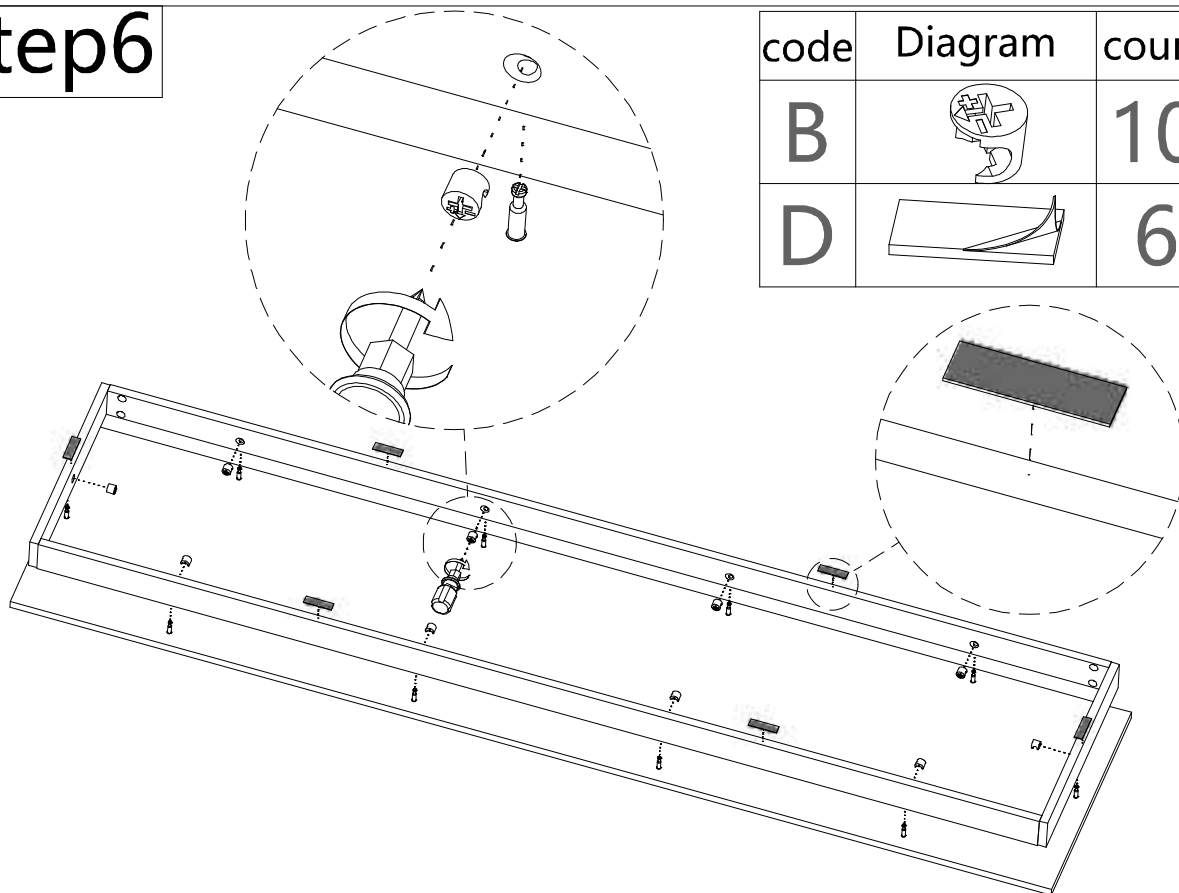

code	Diagram	count
B		10
D		6


Step7

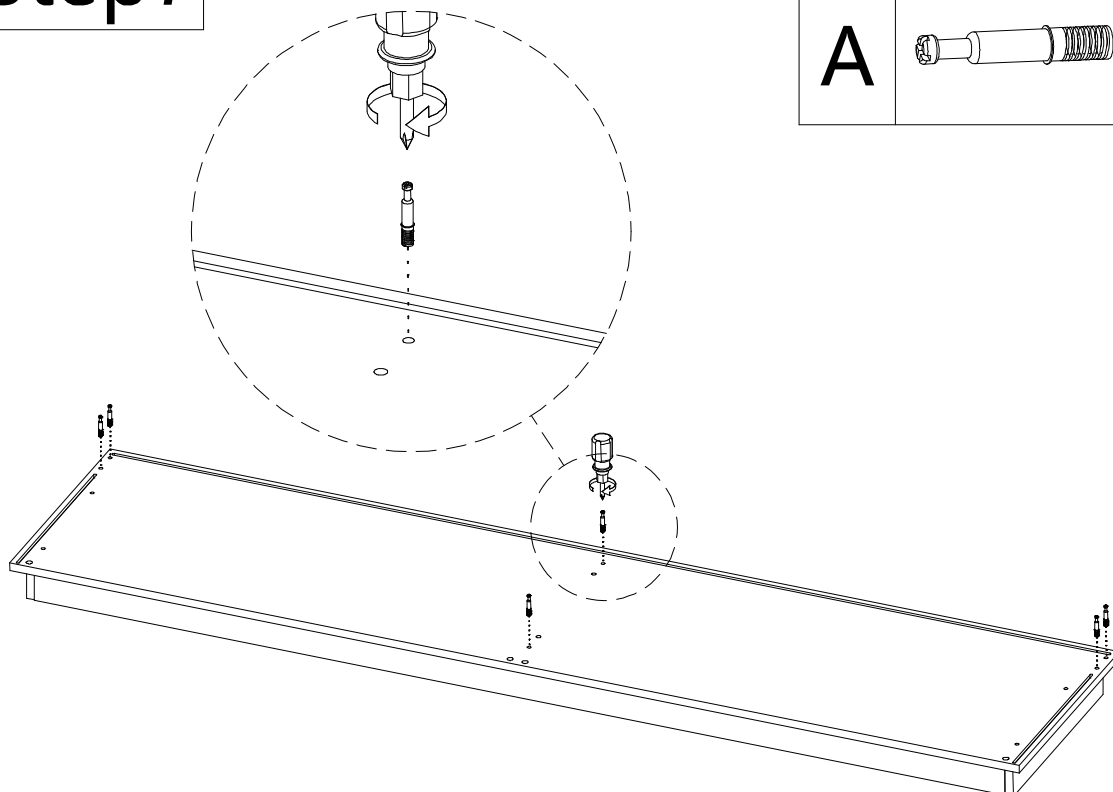

code	Diagram	count
A		6

Step8

code	Diagram	count
B		4

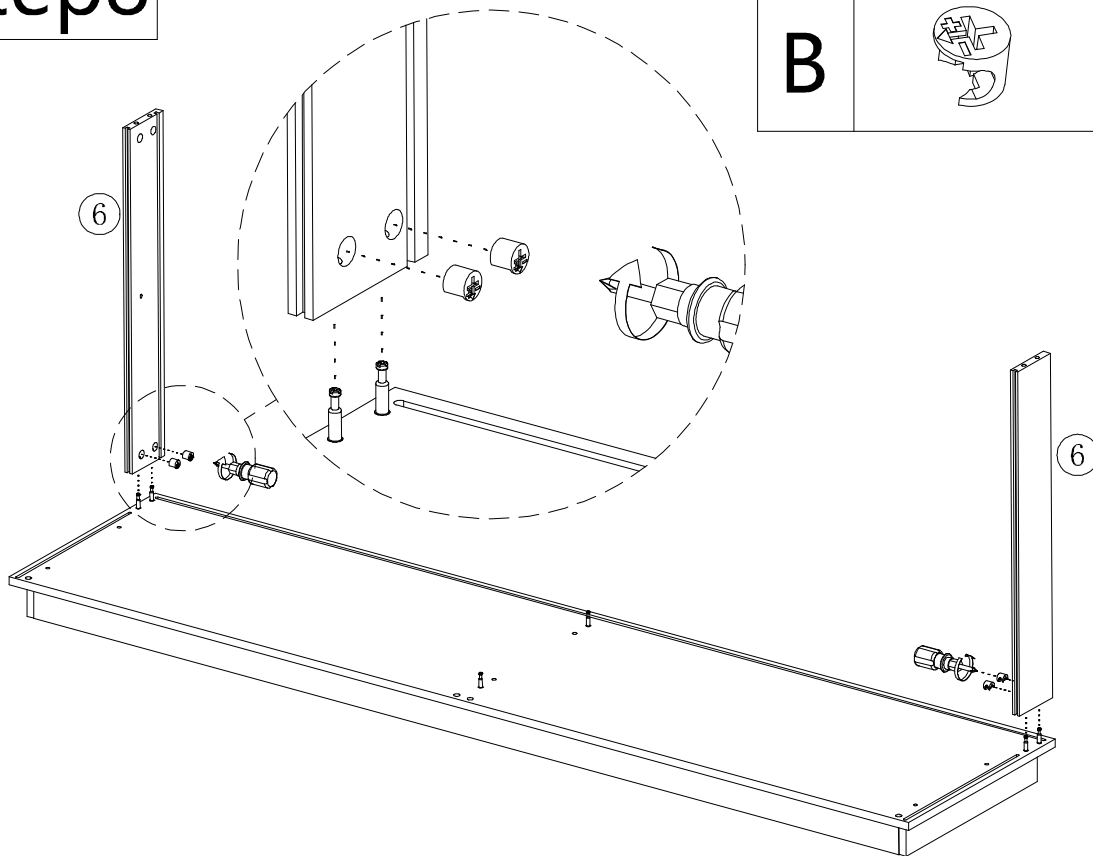


Step9


code	Diagram	count
E		4
F	 M4X8	4


Note: This is a larger hole
place it in this direction

Small holes are used for
glass installation

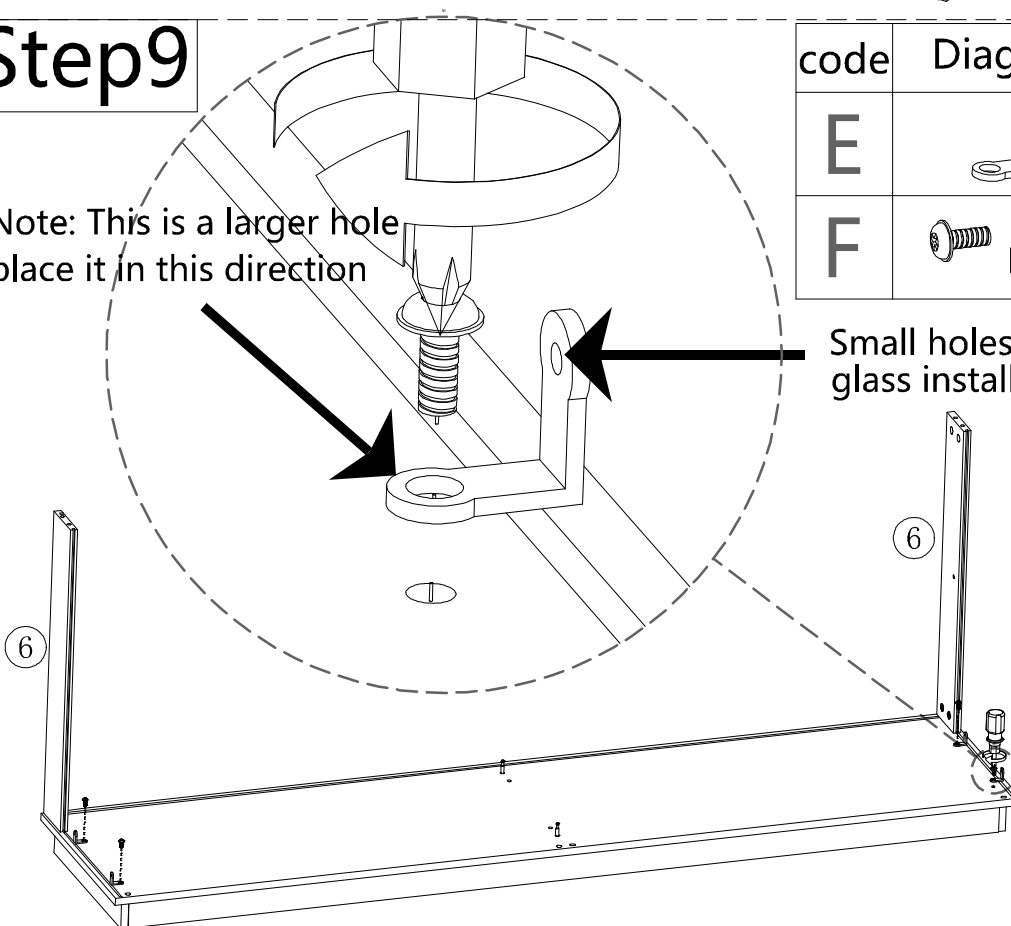


Step10

code	Diagram	count
E	 M4X8	4
E		4

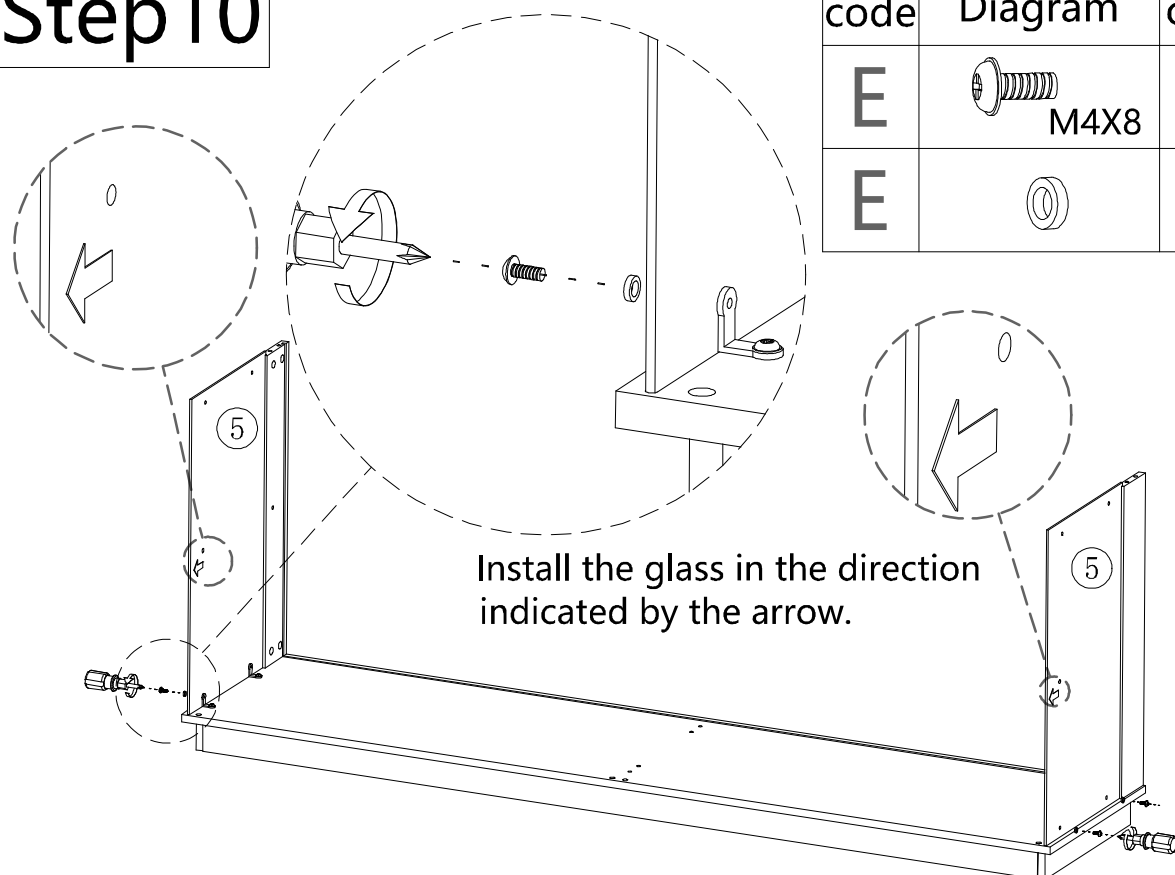


Step11

code	Diagram	count
C		2

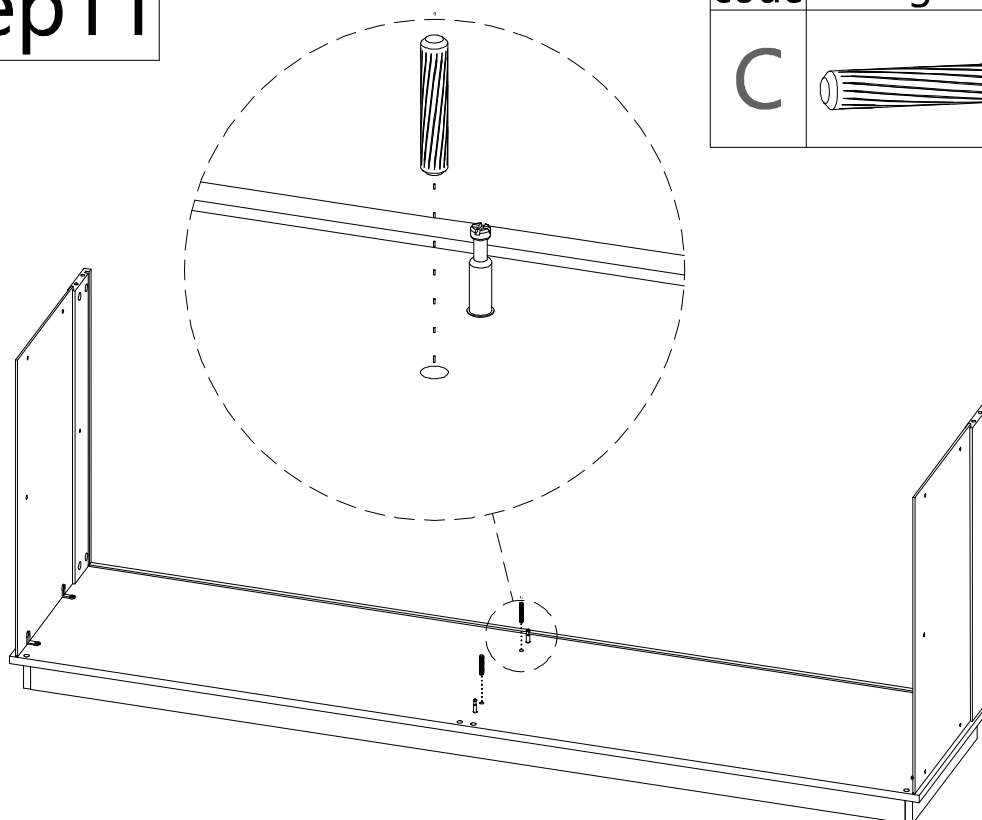


Step12

Note: Insert the board pieces according to this direction.

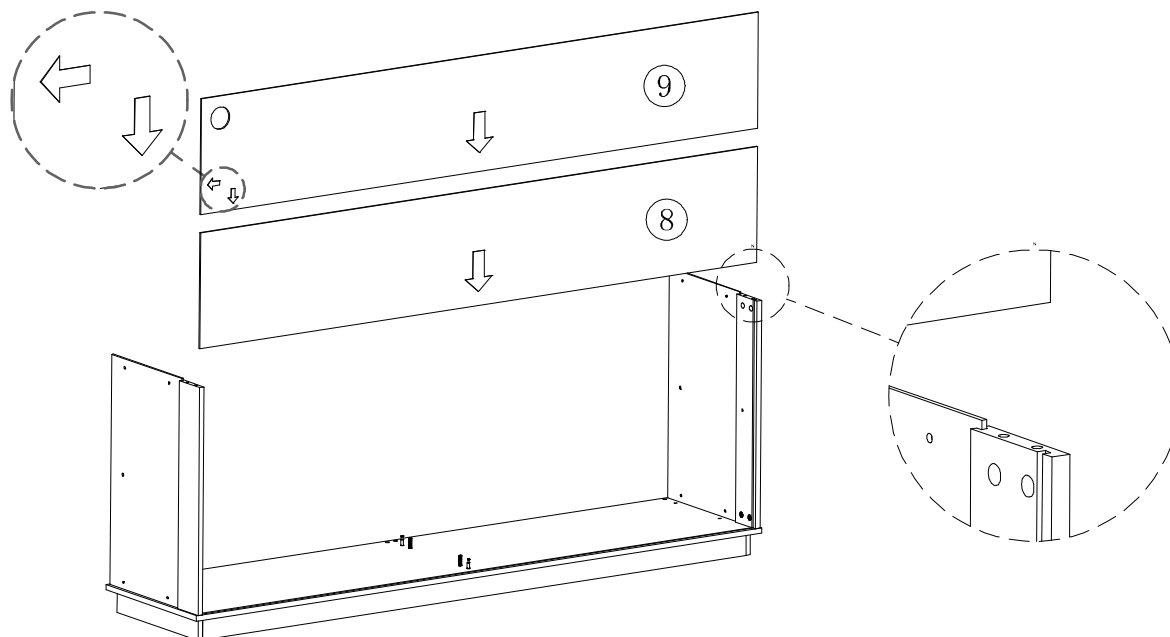


Step13

code	Diagram	count
B		2

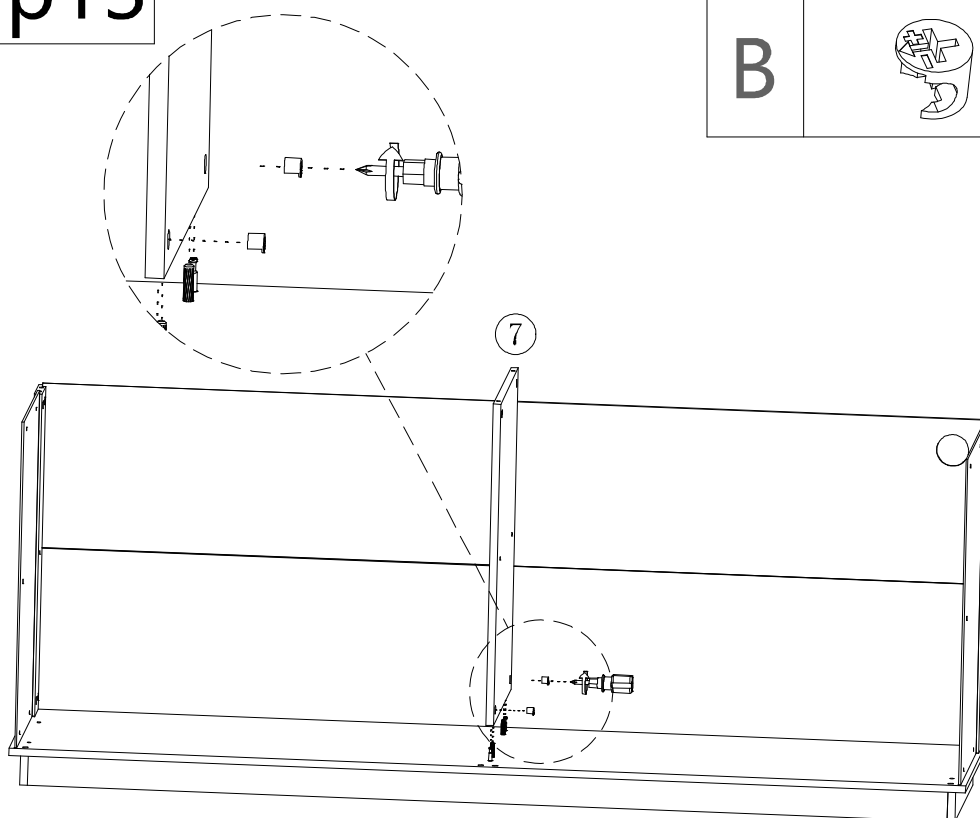



Step14

code	Diagram	count
A		6

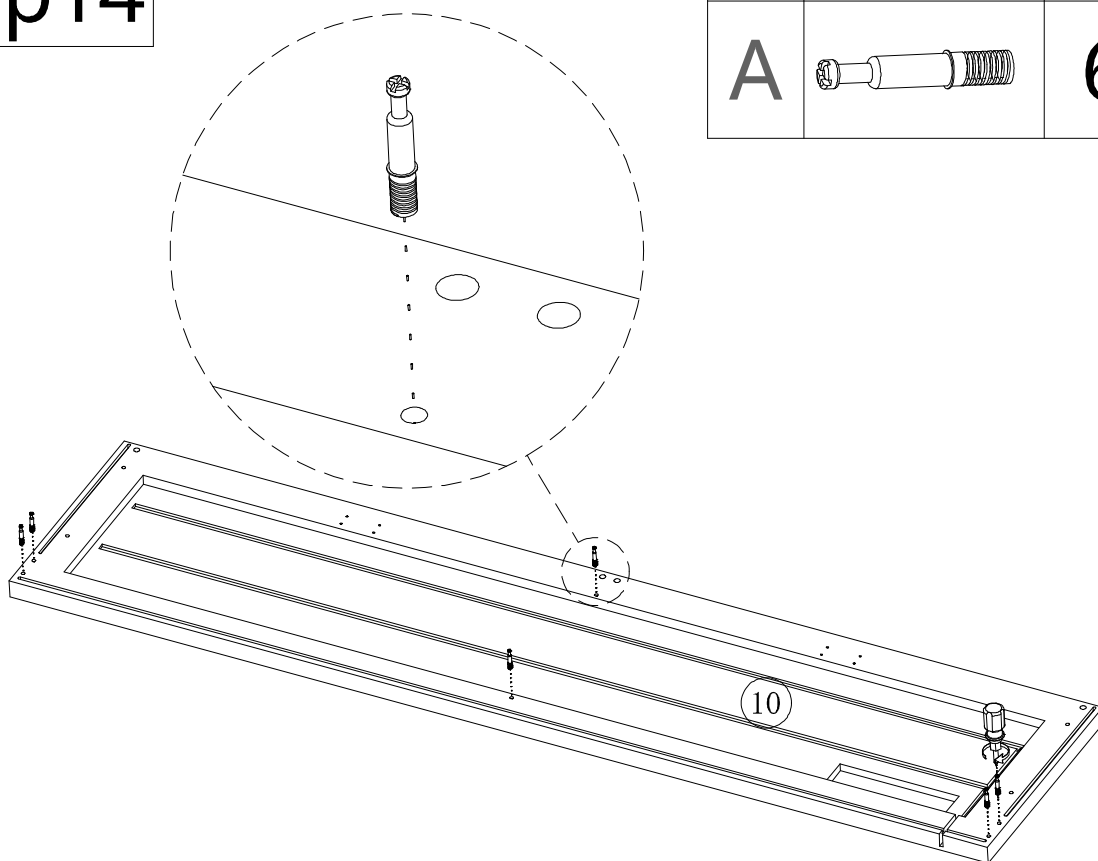


Step15

code	Diagram	count
J		2
J	 3X16mm	8

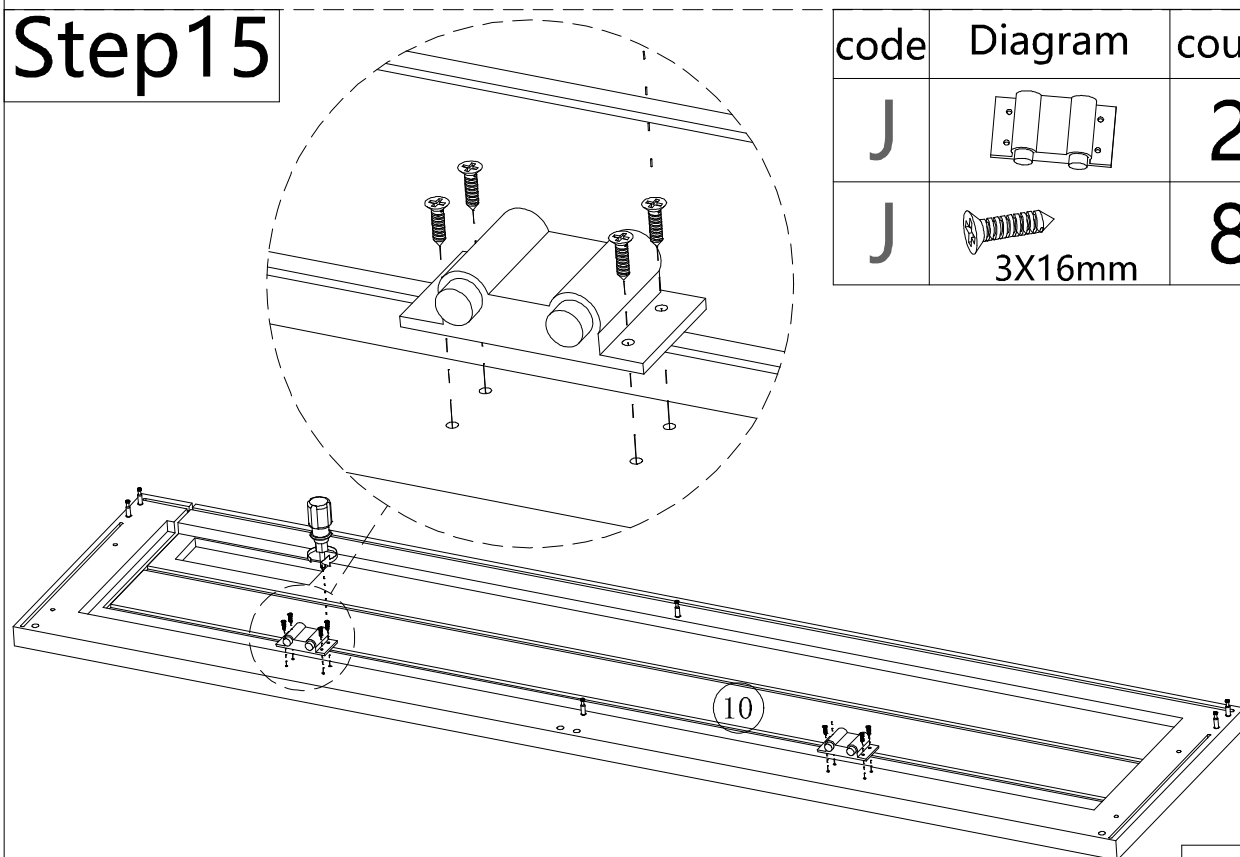


Step16

Small holes are used for glass installation

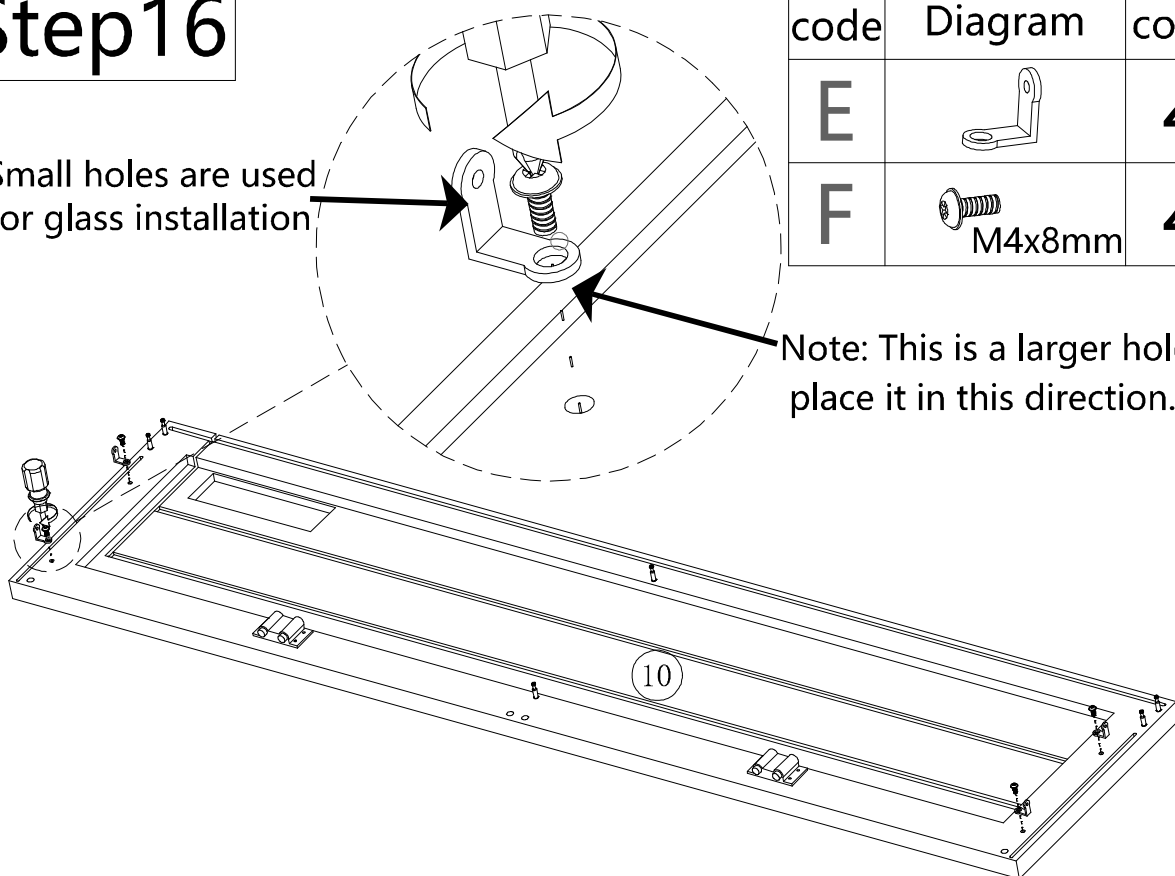

code	Diagram	count
E		4
F	 M4x8mm	4


Step17

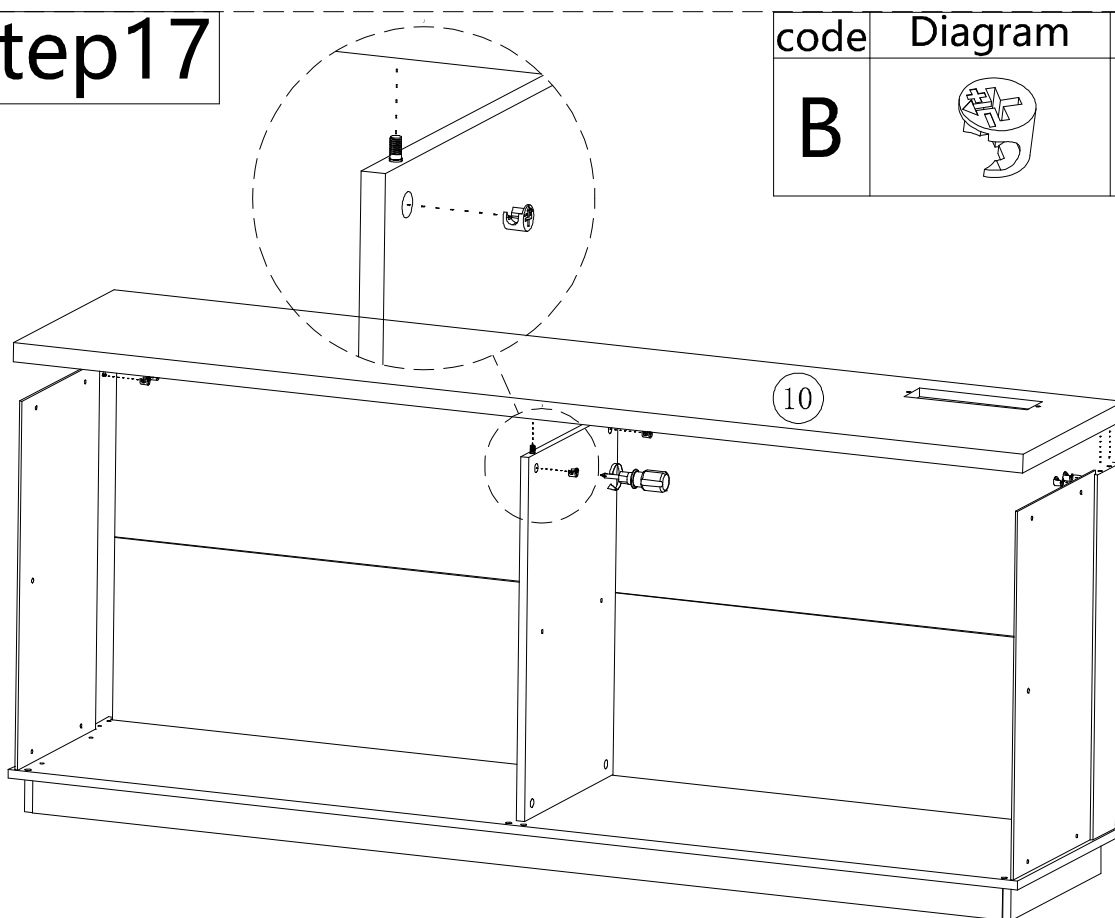

code	Diagram	count
B		6


Step18

code	Diagram	count
E	 M4X8mm	4
E		4

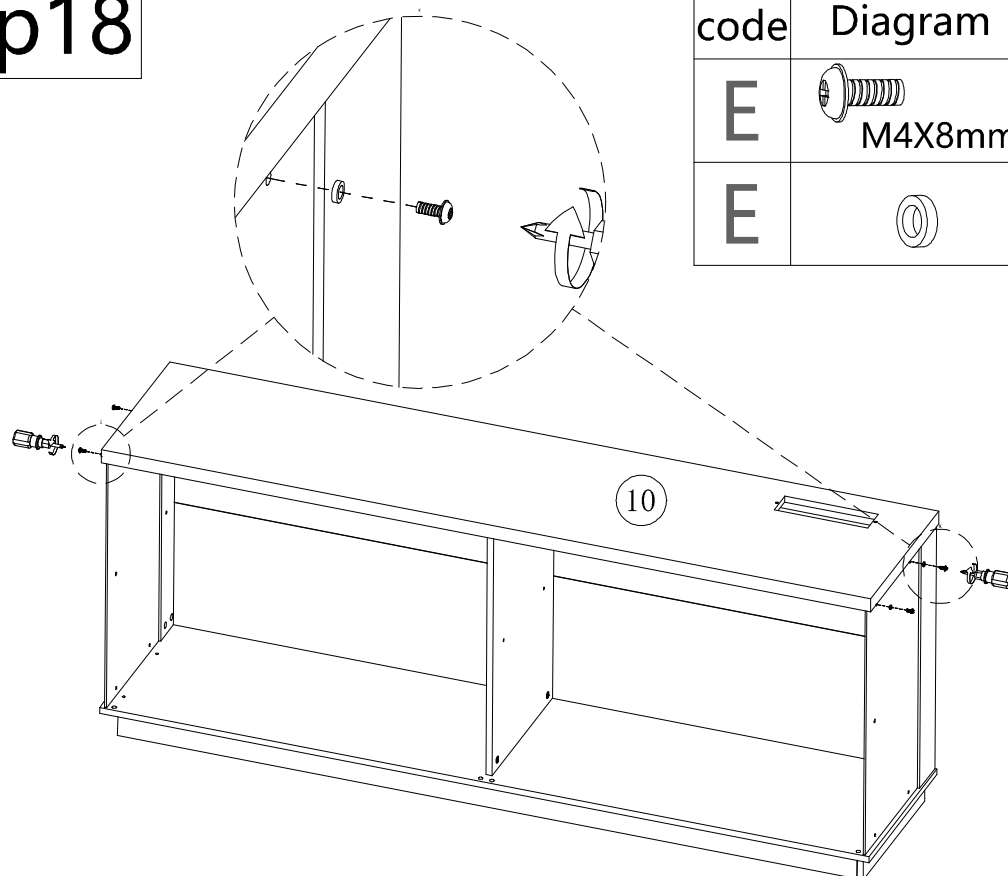


Step19

code	Diagram	count
G		2
G	 M6X16mm	2
G		2

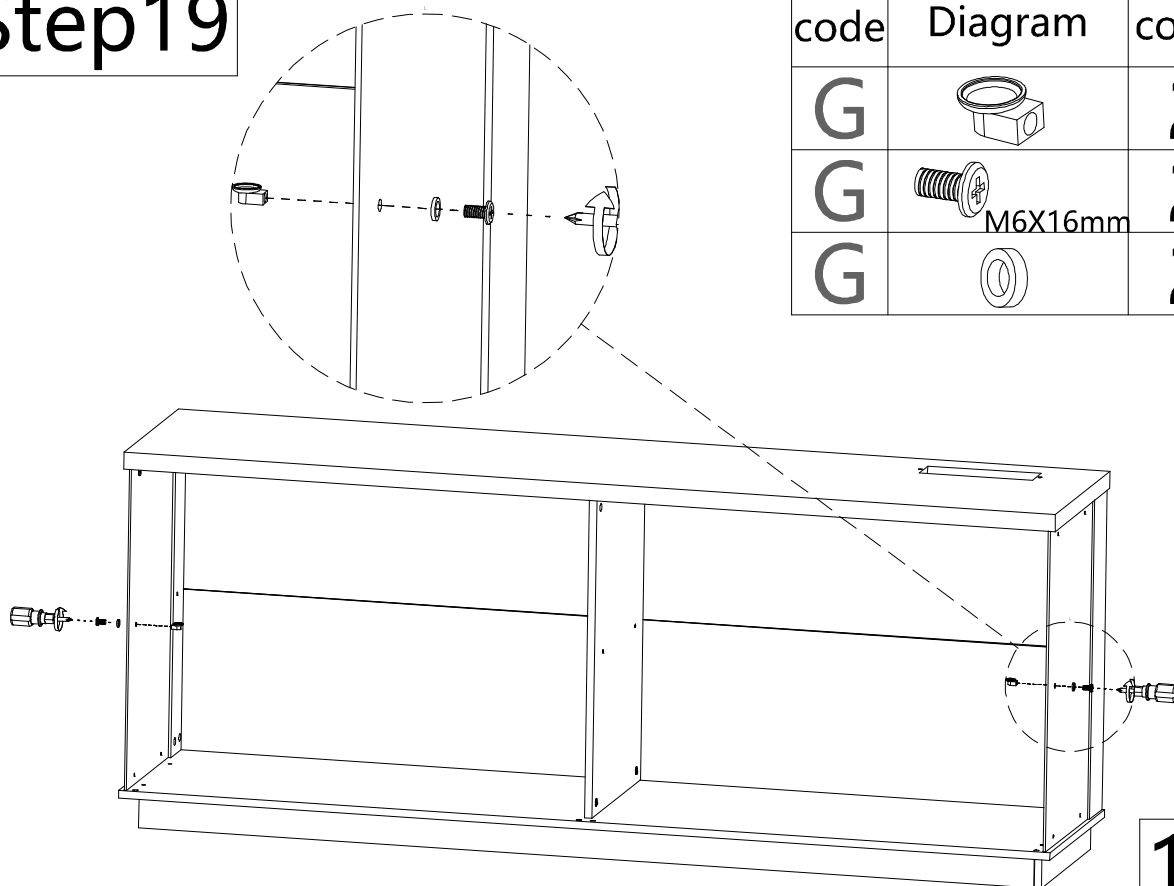


10


Step20

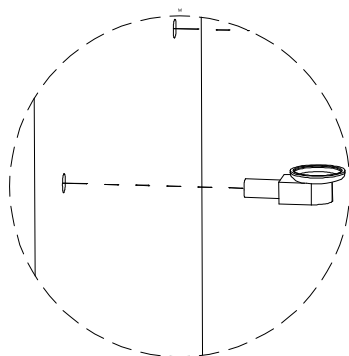


code	Diagram	count
H		6

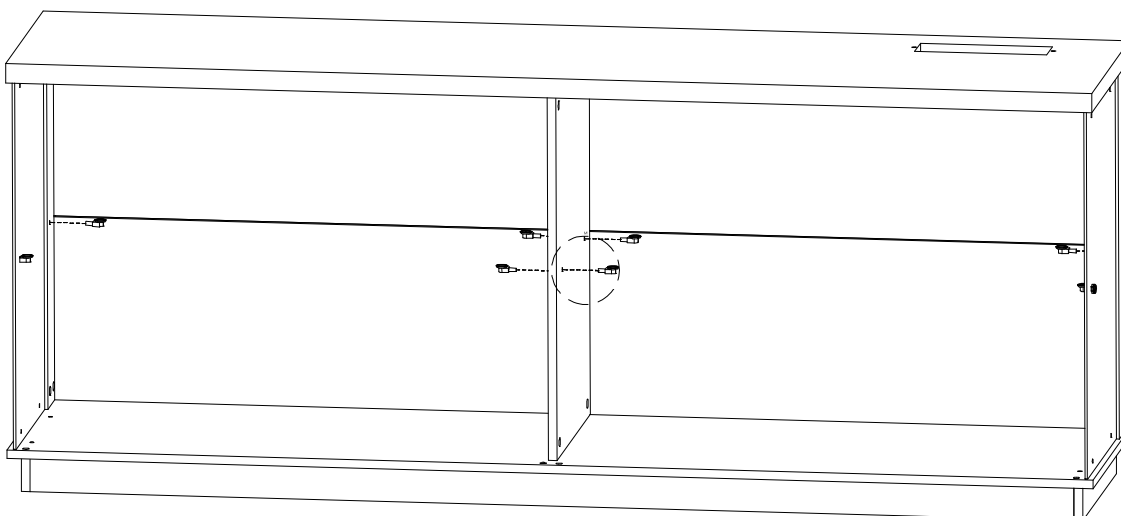


Step21

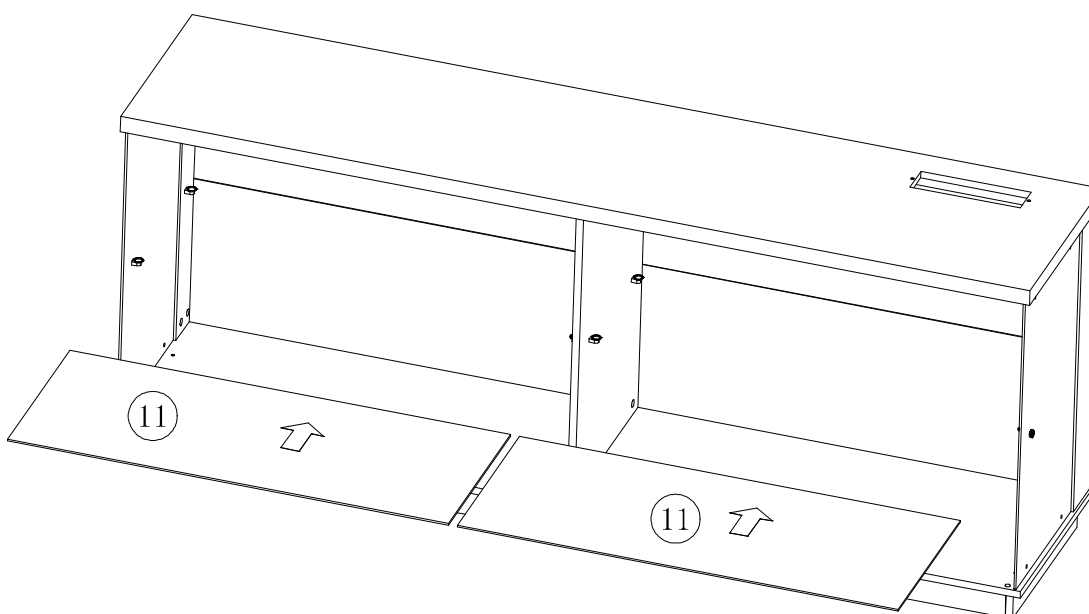

Step22

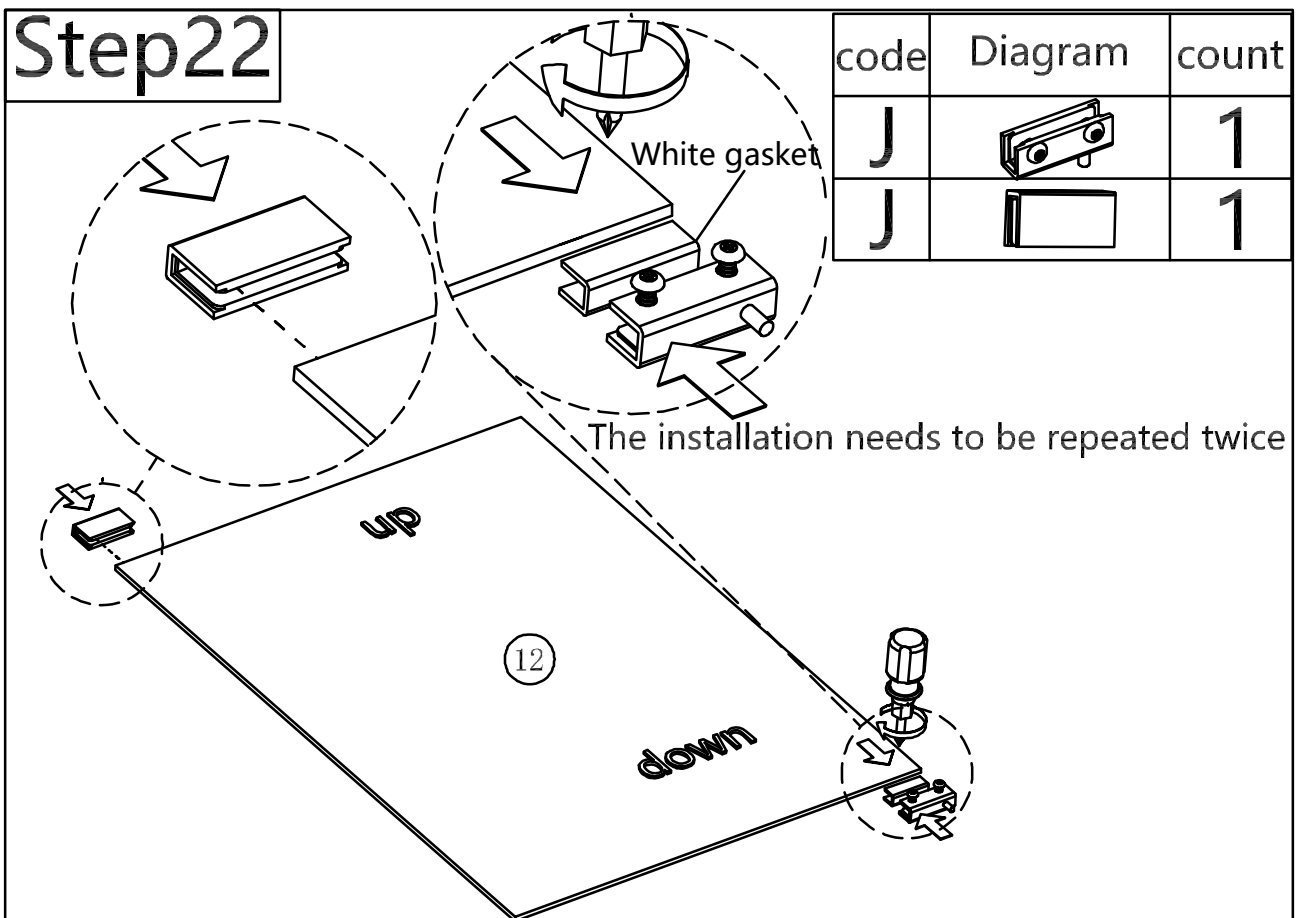


Step23

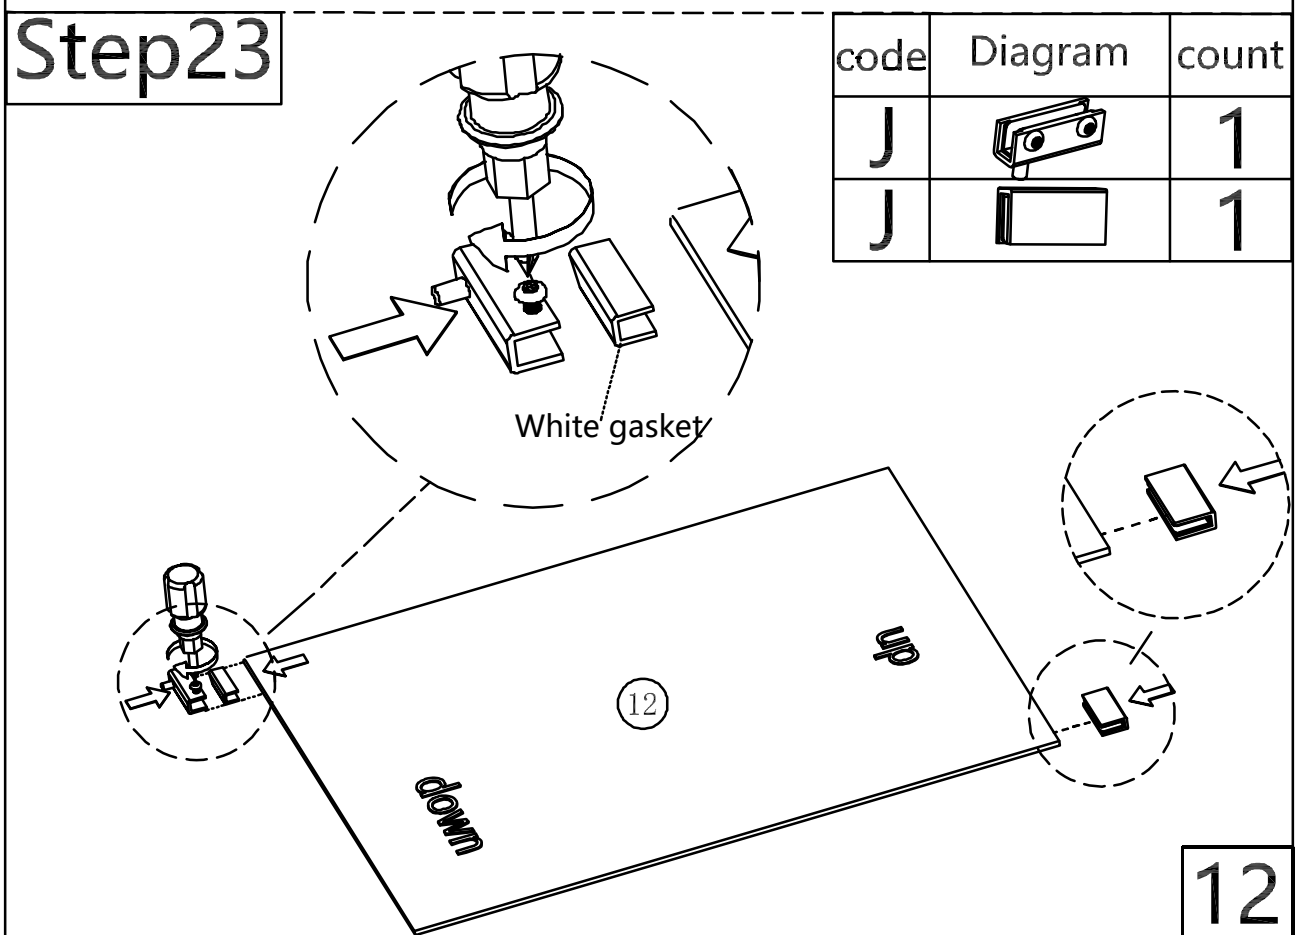






Step24

code	Diagram	count
J		4pcs

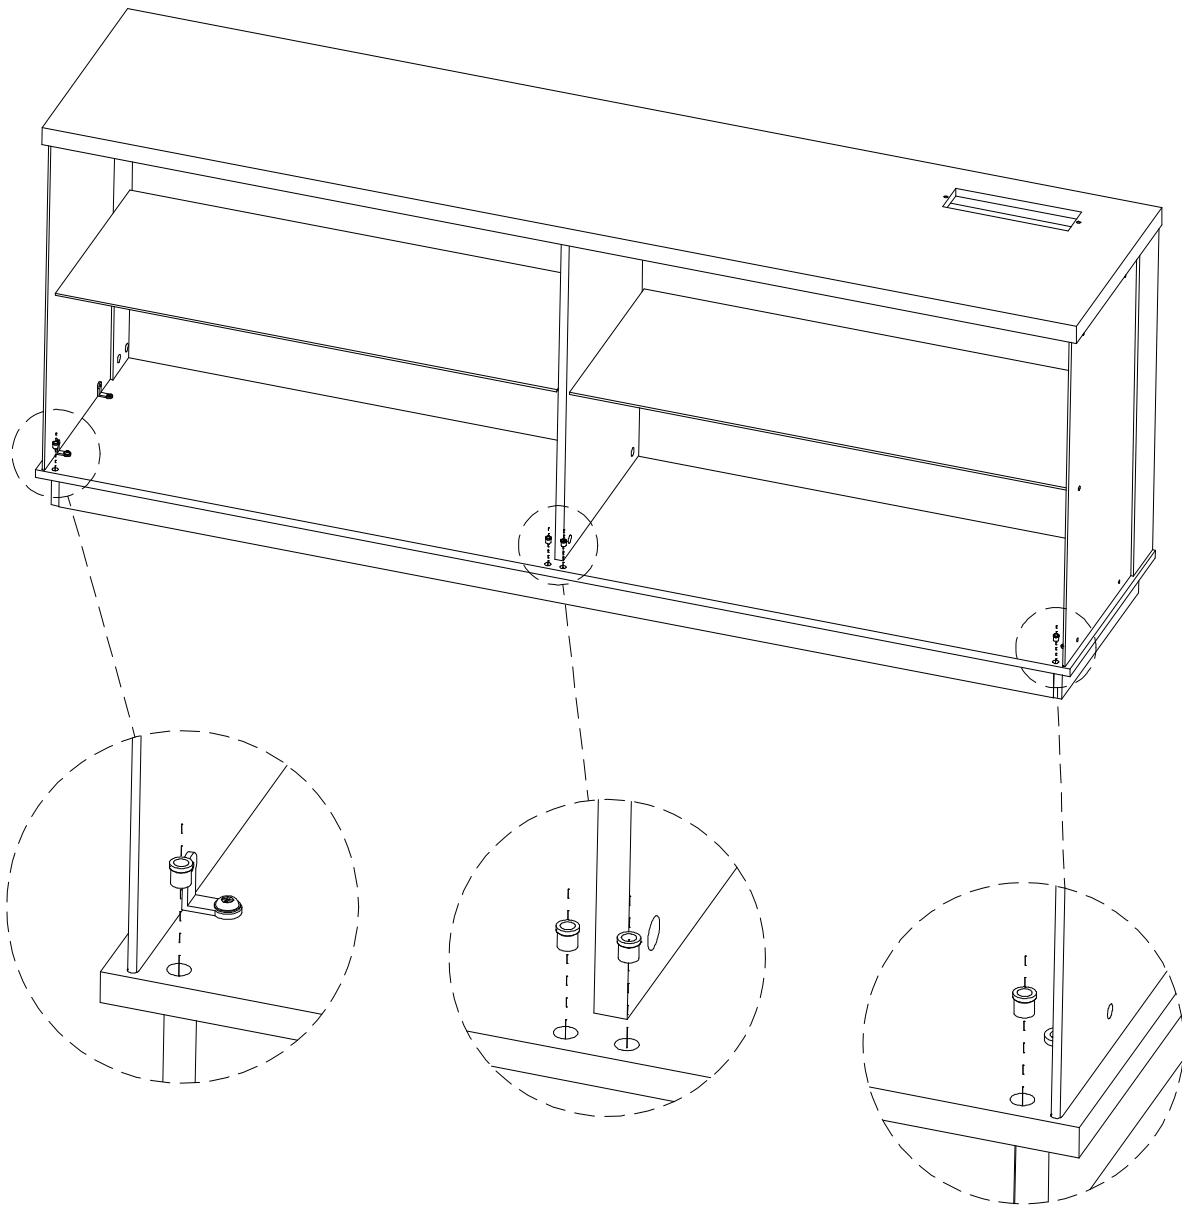


Step25

code	Diagram	count
J		4
J		4

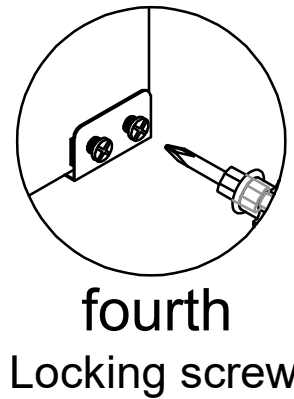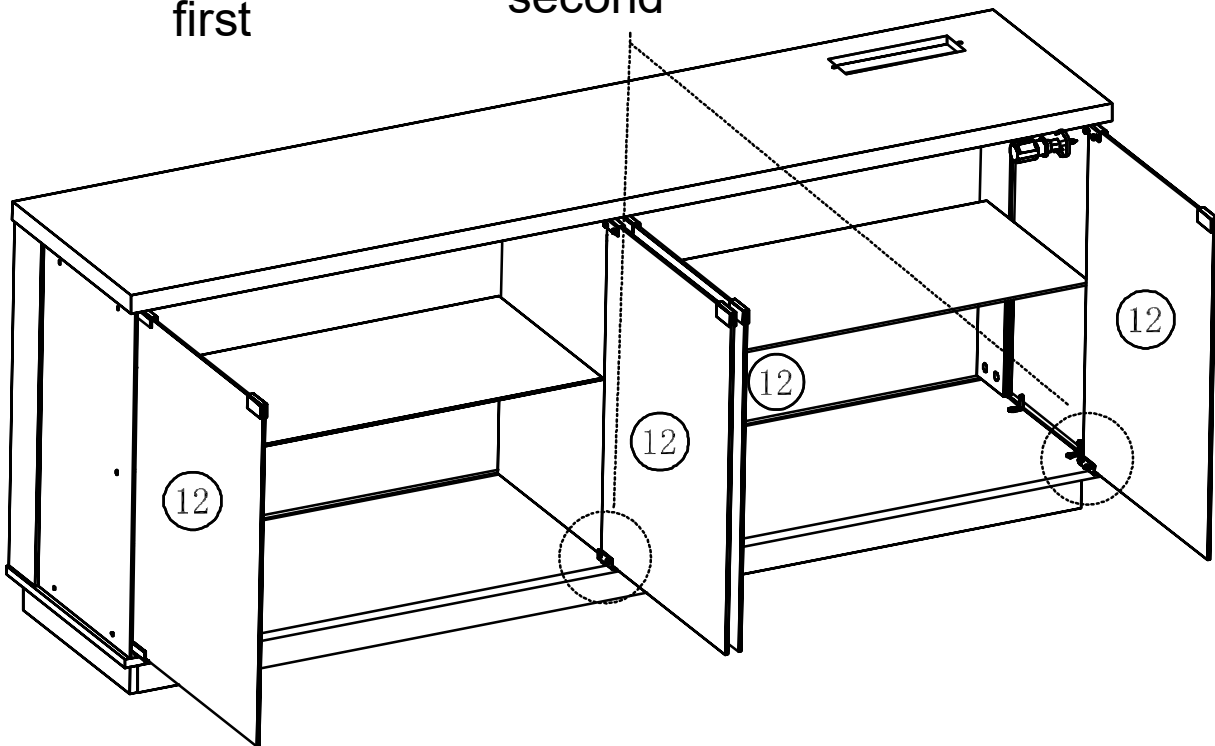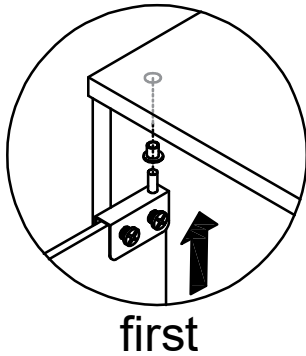

After aligning the glass door, tighten the screws to secure it.



Step26

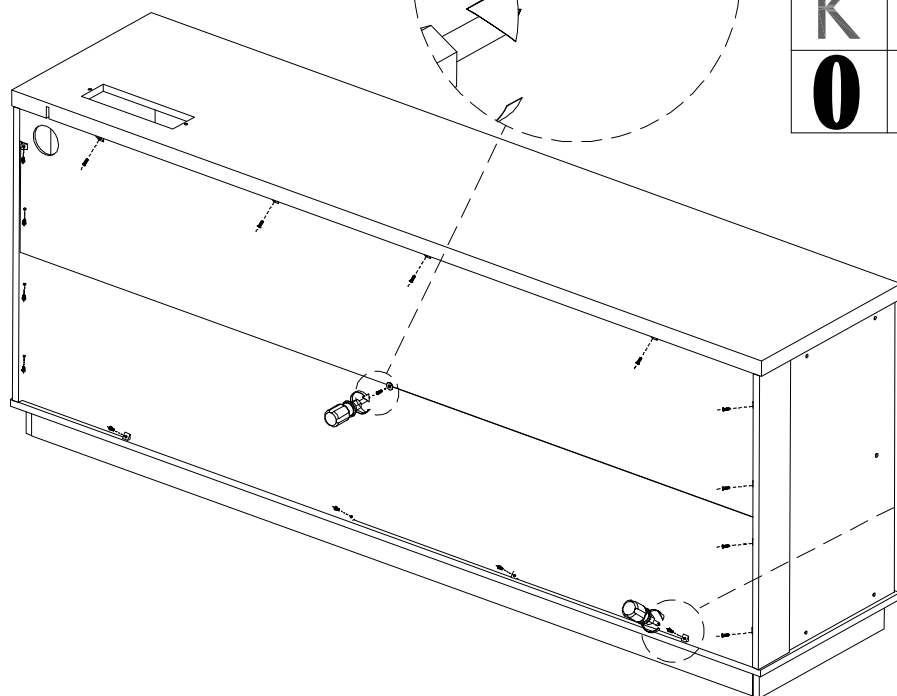


code	Diagram	count
K		16
K	3x16mm	16
0		1

Step27

Connect the light wire




Secure with wire harness clips after connecting the wires

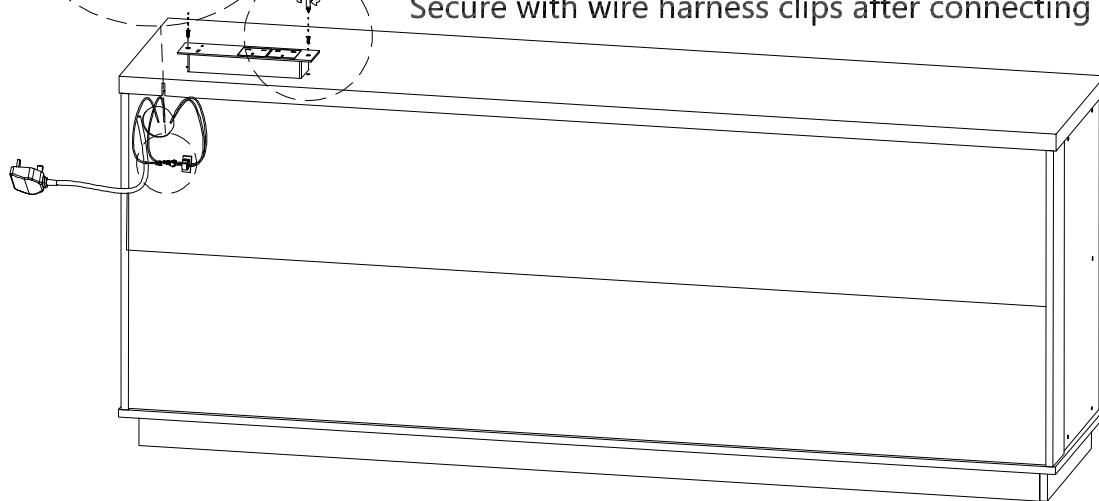

code	Diagram	count
L		1
L	3.5X12mm	2
M		2

Step28

Plug in the power

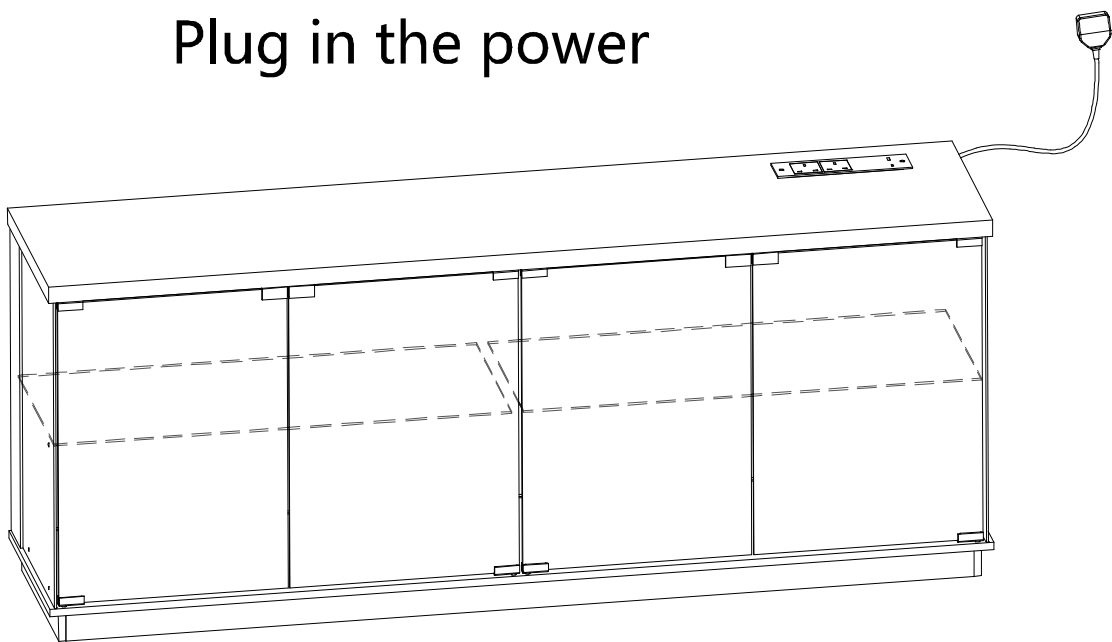


Step 29



Install as required

code	Diagram	count
N		2

3.5x14mm




Install the anti fall hardware on the cabinet as shown in the picture first




Pen

Then mark the wall with a pen through the holes in the anti-fall hardware

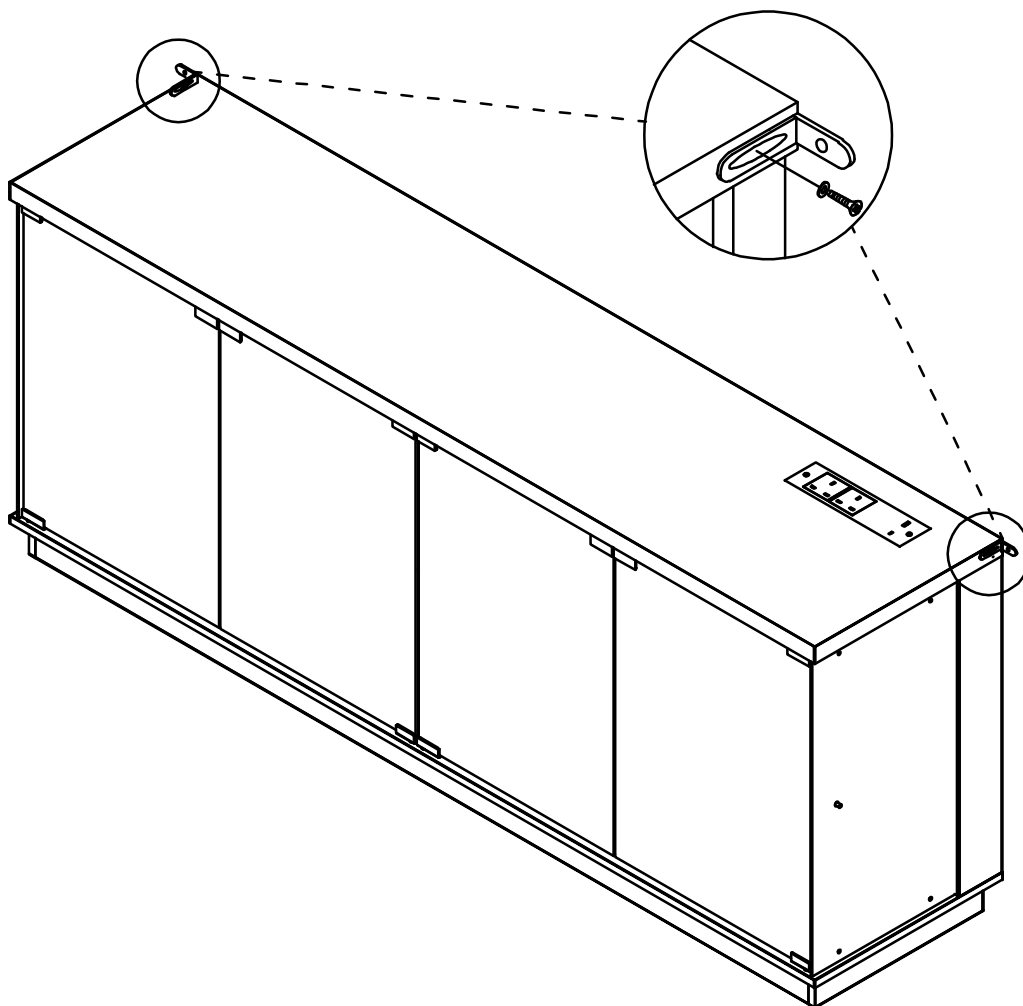


Step30

code	Diagram	count
N		2

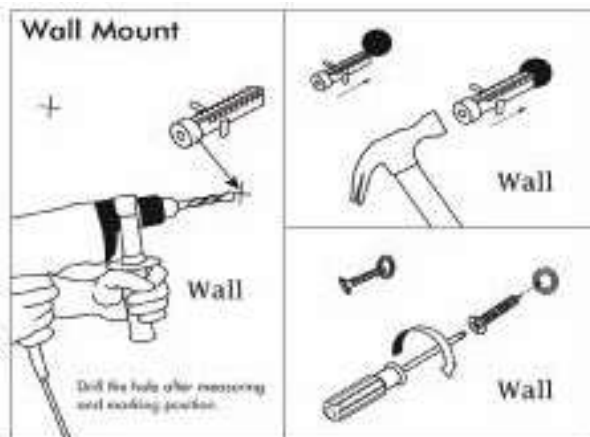

Drill the hole with an electric drill and punch in the colloidal particles

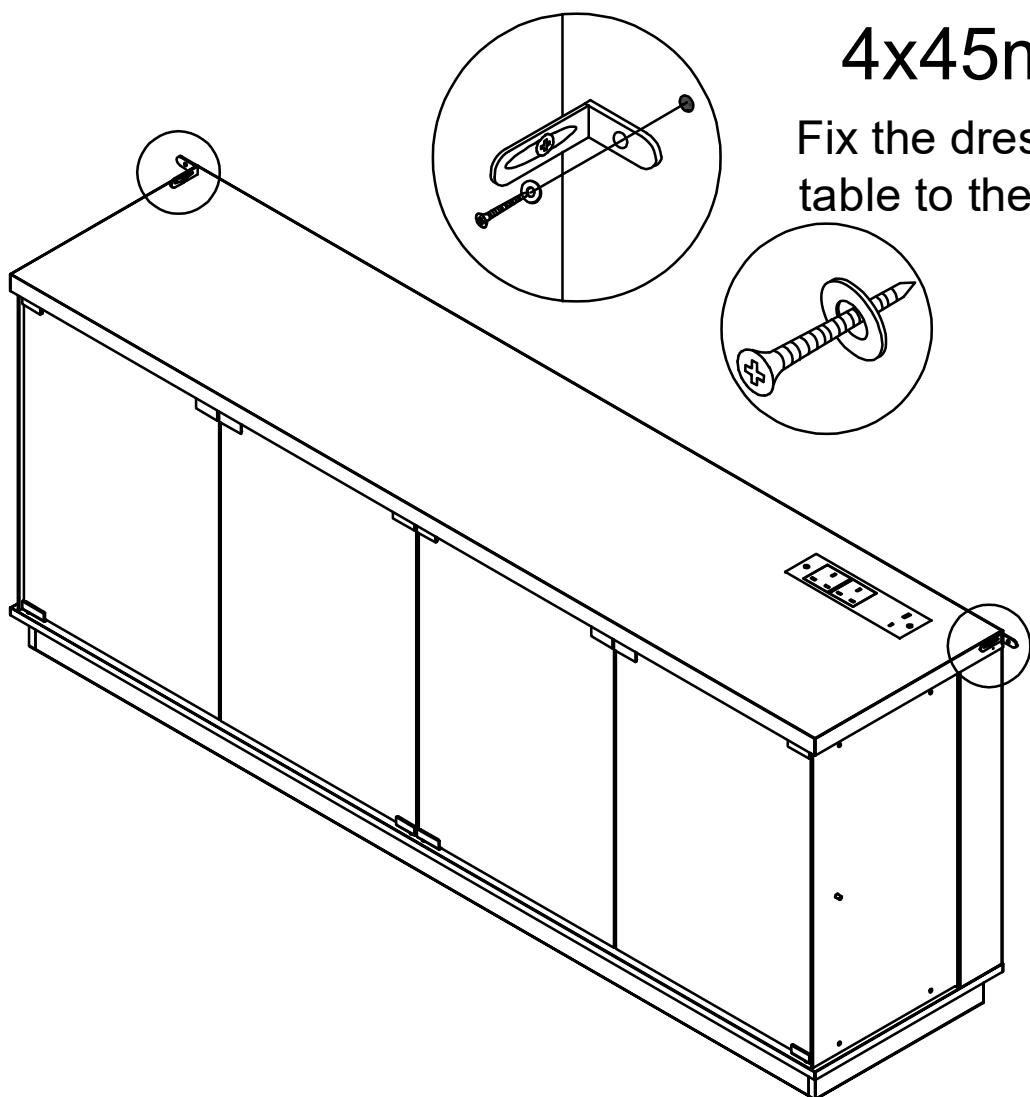

4x45mm

Fix the dressing table to the wall



User's Guide

Thank you for purchasing this product.

To use this product, please connect it to a power source.

Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller.

It has 1 USB output port 1 Type-c port, and 2 socket outlets.

With 2 touch buttons, it can and turn ON/OFF the induction function, turn ON/OFF the light, adjust the light luminance, and change light colors.

The lights can be controlled through both the touch buttons and a dedicated app.

Operation



This touch button is used to turn the light on/off, adjust brightness, and switch the color of the lights.


- i. Single Click: Turn the light on/off.
- ii. Quick Double-Click: Switch between 7 static RGB colors.
- iii. Long Press (2+ seconds): Adjust the light luminance.



This touch button is used to switch dynamic phantom colors and turn ON/OFF the induction function.

- i. Single Click: Switch to Phantom Mode, with 5 magical color transformations available.
- ii. Human Body Sensing Control: Long Press (3+ seconds): Turn on The key press indicator light is on.)
- Long Press (3+ seconds): Turn off (The key press indicator light is off.)

By default, the human body sensing is enabled upon initial power-on, and the indicator light is on.

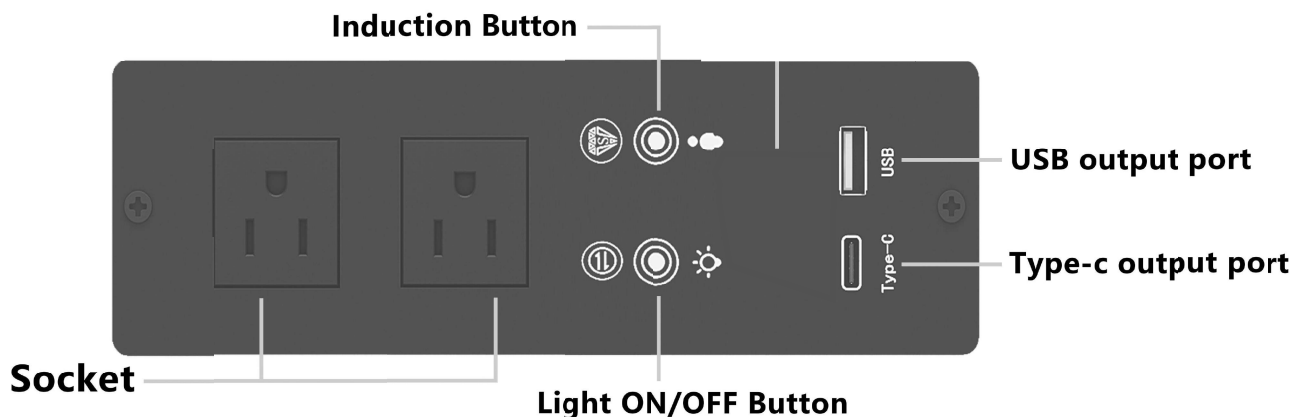

⚠ ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If you have any questions when installing, please feel free to contact us. Thank you.

Socket styles differ by region,
but their overall functions remain unchanged.

American socket



British Socket



European socket



Australian socket



Smart Box Plug Power Off



Select English Language

Select the corresponding device to download.
Note: If the download fails, please turn off the "Enhanced Protection" in the Pure Mode settings of the device.



1



2

It turns blue after clicking

3



4



5 Unplug the smart box



6

⑦ Plug in the smart box power plug.



The appearance of this program icon indicates that the matching is complete



⑧



⑨



⑩



Now you can freely adjust the lighting according to your preferences