


gasoline blower

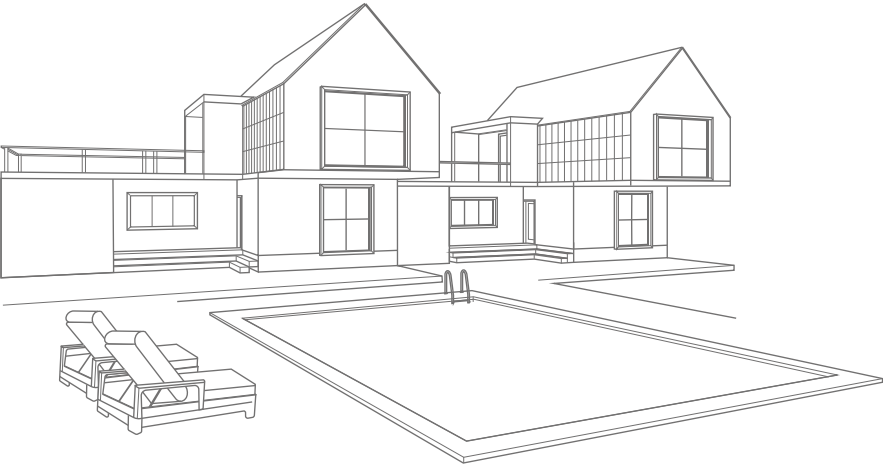

INTRODUCTION

The Back-Pack Blower model EB430 was designed and manufactured to provide long life and on-the-job-dependability. Read and understand this manual. You will find it easy to use and full of helpful operating tips and SAFETY messages.

THE OPERATOR'S MANUAL

contains specifications and information for operation, starting, stopping, maintenance, storage and assembly specific to this product.




TABLE OF CONTENTS

<i>Introduction.....</i>	<i>2</i>
<i>- The Operator's Manual.....</i>	<i>2</i>
<i>Safety</i>	<i>3</i>
<i>-Decals.....</i>	<i>3</i>
<i>-International Symbols.....</i>	<i>4</i>
<i>Safety Instructions.....</i>	<i>4</i>
<i>-Personal Condition and Safety Equipment.....</i>	<i>4</i>
<i>-Equipment.....</i>	<i>5</i>
<i>-Safe Operation.....</i>	<i>5</i>
<i>Assembly.....</i>	<i>6</i>
<i>-Specifications.....</i>	<i>6</i>
<i>Pre-Operation.....</i>	<i>7</i>
<i>-Fuel.....</i>	<i>7</i>
<i>Operation.....</i>	<i>9</i>
<i>-Starting Cold Engine.....</i>	<i>9</i>
<i>-Starting Warm Engine.....</i>	<i>9</i>
<i>-Stopping Engine.....</i>	<i>10</i>
<i>-Operating Blower.....</i>	<i>10</i>

Maintenance..... 10

 -Skill Levels..... 11

 -Maintenance Intervals..... 12

 -Air Filter..... 12

 -Spark Plug..... 12

Troubleshooting..... 12

Storage..... 14

Specifications,descriptions and illustrative material in this literature are as accurate as known at the time of publication, but are subject to change without notice. Illustrations may include optional equipment and accessories, and may not include all standard equipment.

SAFETY

DECALS

Locate these safety decals on your unit. The complete unit illustration,found in the "DESCRIPTION"section,will help you locate them. Make sure the decals are legible and that you understand and follow the instructions on them. If a decal cannot be read,a new one can be ordered from your dealer. See PA-RTS ORDERING instructions for specific information.

GENERAL WARNING DECAL (located on top of blower housing)HOT DECAL(near muffler)



INTERNATIONAL SYMBOLS

Symbol Form/shape					
Symbol description/application	Read and understand Operator's Manual	Wear eyes, ears and head protection	Hot Surface	Safety/Alert	Finger Severing

SAFETY INSTRUCTIONS

PERSONAL CONDITION AND SAFETY EQUIPMENT

WARNING  **DANGER**

Power Blower users risk injury to themselves and others if the power blower is used improperly and or safety precautions are not followed. Proper clothing and safety gear must be worn when operating a blower.

physical condition--

*Your judgment and physical dexterity may not be good;
if you are tired or sick,
if you are taking medication,
if you have taken alcohol or drugs.
Operate unit only if you are physically and mentally well.*

Eye Protection--

Wear eye protection that meets EN166 or CE requirements whenever you operate the blower.

Hand Protection--

Wear no-slip, heavy duty work gloves to improve your grip on the blower handle. Gloves also reduce the transmission of machine vibration to your hands.

Breathing Protection--

Wear a face mask to protect against dust.

Hearing Protection--

We recommend wearing hearing protection whenever unit is used.

Proper Clothing--

Wear snug fitting,durable clothing;

Pants should have long legs,shirts with long sleeves.

DO NOT WEAR SHORTS,

DO NOT WEAR TIES,SCARVES,JEWELRY.

Wear sturdy work shoes with nonskid soles;

DO NOT WEAR OPEN TOED SHOES,

DO NOT OPERATE UNIT BAREFOOTED.

Keep long hair away from engine and blower intake.Retain hair with cap or net.

Hot Humid Weather--

Heavy protective clothing can increase operator fatigue which may lead to heat stroke.Schedule heavy work for early morning or late afternoon hours when temperatures are cooler.

EQUIPMENT

Before operation a complete check of the unit must be performed:

Check unit for loose/missing nuts, bolts and screws. Tighten and/or replace as needed.

Inspect fuel lines,tank and area around carburetor for fuel leaks.DO NOT operate unit if leaks are found.

Keep exhaust area clear of flammable debris.Avoid contact during and immediately after operation.



SAFE OPERATION

Determine Operation Area--

Review area to be cleared.Look for potential hazards such as stones or metal objects.

Spectators and fellow workers must be warned,and children and animals prevented from coming nearer than 15m while the blower is in use.

Take wind conditions into account:avoid open doors and windows.

Provide all operators of this equipment with the Operator's Manual and instructions for safe operation.

Do not point blower at people or animals.

Start unit on ground with throttle at idle. Check that blower pipe is not blocked by the ground or by any objects.



Keep A Firm Grip

Hold handle with fingers together encircling the handle.

Keep A Solid Stance

Maintain footing and balance at all times. Do not stand on slippery, uneven or unstable surfaces. Do not work in odd positions or on ladders.

Do not perform Maintenance or Assembly procedures with engine running.

Noise Control

Follow local noise regulations on sound levels and hours of operations. Use only during appropriate hours.

Never use a higher speed setting than necessary to perform a task. The higher the engine speed the louder the blower noise.

Be a good neighbor.

Avoid Hot Surfaces

During operation, the muffler or catalytic muffler and surrounding cover may become extremely hot. Avoid contact during and immediately after operation. Always keep exhaust area clear of flammable debris. Allow the engine and muffler to completely cool before performing any maintenance activity.



ASSEMBLY

SPECIFICATIONS

PRE- OPERATION

FUEL

Fuel Requirements

Use only fresh ,clean fuel

Mix all fuels with premium 2-cycle engine oil at a gasoline/oil ratio of 25:1

Mixing Instructions

1.Fill an approved fuel container with half of the required amount of gasoline.

2.Add 2-stroke oil to gasoline.

3.Close container and shake to mix oil with gasoline.

4.Add remaining gasoline and remix.

5.Install fuel container cap and wipe any spilled fuel from container and surrounding area.

Handling Fuel

WARNING



DANGER

Fuel is VERY flammable. Use extreme care when mixing, storing or handling or serious personal injury may result.

Use an approved fuel container.

DO NOT smoke near fuel.

DO NOT allow flames or sparks near fuel.

Fuel tanks/cans may be under pressure. Always loosen fuel caps slowly allowing pressure to equalize.

NEVER refuel a unit when the engine is HOT.

NEVER refuel a unit with the engine running.

DO NOT fill fuel tanks indoors. ALWAYS fill fuel tanks outdoors over bare ground.

Securely tighten fuel cap after refueling.

Inspect for fuel leakage. If fuel leakage is found, do not start or operate unit until leakage is repaired.

IMPORTANT

Spilled fuel is a leading cause of hydrocarbon emissions. Some states may require the use of automatic fuel shut-off containers to reduce fuel spillage. Contact your dealer for ordering information.

After Refueling-

Wipe any spilled fuel from the unit.

Move at least 3m from refueling location before starting.

After use-

DO NOT store a unit with fuel in its tank. Leaks can occur.

Return unused fuel to an approved fuel storage container.

Storage-

Fuel storage laws vary by locality. Contact your local government for the laws

affecting your area. As a precaution, store fuel in an approved, air tight container. Store in a well ventilated, unoccupied building, away from sparks and flames. Do not store fuel longer than 30 days.

IMPORTANT

Stored fuel ages. Do not mix more fuel than you expect to use in thirty days, ninety days when a fuel stabilizer is added.

Stored two-stroke fuel may separate. ALWAYS shake fuel container thoroughly before each use.

OPERATION

Recoil starter: Use short pulls—only 1/2–2/3 of rope length for starting. Do not allow the rope to snap back in. Always hold the unit firmly.

Rotate spring loaded throttle handle downward to a comfortable operating position.

STARTING COLD ENGINE

1. Move throttle lever to START position.

2. Close Choke—Cold Start.


Move choke (A) up to “Cold Start” position.

3. Primer Bulb—Prime.

Pump primer bulb (B) until fuel is visible and flows freely in the clear fuel tank return line. Pump bulb an additional 4 or 5 times.

4. Pull recoil starter handle (C) until engine fires (5 or 6 pulls)

5. Move choke (A) to run position and if necessary, restart engine.



NOTE

If engine does not start after 5 pulls, use cold start procedures.

NOTE

Allow engine to warm up before use.

STARTING WARM ENGINE

1. Move throttle lever to start/idle detent position.

2. Pull recoil starter handle (C) and engine should start. Do not use choke (A).

NOTE

If engine does not start after 5 pulls, use cold start procedures.

STOPPING ENGINE

1. Move the throttle lever to the idling position and press the stop switch until the engine comes to a complete stop.

OPERATING BLOWER

WARNING DANGER

Always wear safety glasses, hearing protection, a face filter mask and take all safety precautions or serious personal injury may result. Do not point the blower pipe in the direction of people or pets.

Read the Safety Section on pages 3 and 6 carefully.

IMPORTANT

To avoid engine damage due to over revving, do not block blower pipe opening.

- 1. Use only during appropriate hours.*
- 2. Allow the engine to warm up at a fast idle for a few minutes.*
- 3. Set engine speed with throttle lever.*
- 4. Use lower speed to blow dry leaves from walks, patios and drives.*
- 5. Additional speed may be necessary to clean grass and leaves from a lawn or flower bed.*
- 6. Higher speed may be necessary to move gravel, dirt, snow, bottles or cans from a driveway, street, parking lot or stadium.*

MAINTENANCE

Your blower is designed to provide many hours of trouble free service. Regular scheduled maintenance will help your blower achieve that goal. If you are unsure or are not equipped with the necessary tools, you may want to take your unit to an Service Dealer for maintenance. To help you decide whether you want to DO-IT-YOURSELF or have the Dealer do it, each maintenance task has been graded. If task is not listed, see your Dealer for repairs.

MAINTENANCE INTERVALS

Component/System	Maintenance Procedure	Before Use	Every Refuel	Daily Every 4 Hours	3 Months or 90 Hours	6 Months or 270 Hours	Yearly
Air Filter	Inspect/Replace	I/C		I/C		R	
Fuel Strainer	Inspect/Replace				I		R
Fuel Line	Inspect/Replace	I	I				R
Carburetor	Inspect/Replace					I (1)	R (1)
Choke System	Inspect/Replace		I				
Cooling System	Inspect/Clean	I/C		I/C			
Cylinder Exhaust Port	Inspect/Clean/Decarbon				I/C		
Muffler Spark Arrestor	Inspect/Clean/Replace				I		R
Recoil Rope	Inspect/Clean	I					I
Fuel Leaks	Inspect/Repair	I					I
Spark Plug	Clean/Replace				I/C	R	
Lgnition System	Clean/Replace	No Maintenance required for coil and flywheel					
Screws/Nuts/Bolts	Inspect/Tighten/Replace	I					

I=Inspect,C=Clean,R=Replace

IMPORTANT

Time intervals shown are maximum.Actual use and your experience will determine the frequency of required maintenance.

All recommendations to replace are based on finding damaged or wear during inspection.

(1) Replacement will be required for Commercial use after 600 hours.For Consumer use, cleaning every 6 months is required.

Cleaning includes rebuild kits.

AIR FILTER

1.Close choke (Cold Start Position) .This prevents dirt from entering the carburetor throat when the air filter is removed.

Brush accumulated dirt from the air cleaner area.

2.Remove the air cleaner cover. Clean and inspect the element for damage. If element is fuel soaked and very dirty,replace.

3.If element can be cleaned and reused,be certain it:

-still fits the cavity in the air cleaner cover.

-is installed with the original side out.


SPARK PLUG

1.Remove spark plug,and check for fouling,worn and rounded center electrode.

2.Clean the plug or replace with a new one.DO NOT sand blast to clean.Remaining sand will damage engine.

3.Adjust spark plug gap by bending outer electrode.

4.Tighten spark plug to (145-155) kg/cm.



TROUBLESHOOTING

WARNING DANGER

Fuel vapors are extremely flammable and/or explosion. Never test for ignition spark near an open spark plug opening,otherwise serious personal injury may result.

Problem			Cause	Remedy
Engine-starts hard Engine-does not start				
Engine Cranks	Fuel at carburetor	No fuel at carburetor	Fuel strainer clogged Fuel line clogged Carburetor	Clean Clean See your dealer
	Fuel at cylinder	No fuel at cylinder	Carburetor	See your dealer
		Muffler wet with fuel	Fuel Mixture is too rich	Open choke Clean/replace air filter Adjust carburetor See your dealer
	Spark at end of plug wire	No spark at end of plug wire	Stop switch off Electrical problem Interlock switch	Turn switch on See your dealer See your dealer
	Spark at plug	No spark at plug	Spark gap incorrect Covered with carbon Fouled with fuel Spark plug defective	Adjust 0.65mm Clean or replace Clean or replace Replace plug
Engine does not crank			Internal engine problem	See your dealer
Engine runs	Dies or accelerates poorly		Air filter dirty Fuel filter dirty Fuel vent plugged Spark plug Carburetor Cooling system plugged Exhaust port/spark arrestor screen plugged	Clean or replace Replace Replace Clean and adjust/replace Adjust Clean Clean
Engine runs properly	Blower does not work, is weak or uneven		Blower Pipe clogged, loose or damaged	Unclog Tighten Replace

STORAGE

WARNING **DANGER**

During operation the muffler or catalytic muffler and surrounding cover become hot. Always keep exhaust area clear of flammable debris during transportation or when storing, otherwise serious property damage or personal injury may result.

Long Term Storage (Over 30 Days)

Do not store your unit for a prolonged period of time (30 days or longer) without performing protective storage maintenance which includes the following:

1.Store unit in a dry,dust free place,out of the reach of children.

WARNING **DANGER**

Do not store in enclosure where fuel fumes may accumulate or reach an open flame or spark.

2.Place the switch in the “STOP” position.

3.Remove accumulation of grease,oil,dirt and debris from exterior of unit.

4.Perform all periodic lubrication and services that are required.

5.Tighten all screws and nuts.

6.Drain the fuel tank completely and pull the recoil starter handle several times to remove fuel from the carburetor.

7.Remove the spark plug and pour 7cc (1/4oz,1/2tablespoon) of fresh,clean 2-stroke engine oil into the cylinder through the spark plug hole.

A.Place a clean cloth over the spark plug hole.


B.Pull the recoil starter handle 2-3 times to distribute the oil inside the engine.

C.Observe the piston location through the spark plug hole.Pull the recoil handle slowly until the piston reaches the top of its travel and leave it there.

8.Install the spark plug (do not connect ignition cable) .


9.Remove blower pipe assembly from unit.

FIGURE (—) EXPLODING DRAWING-ENGINE

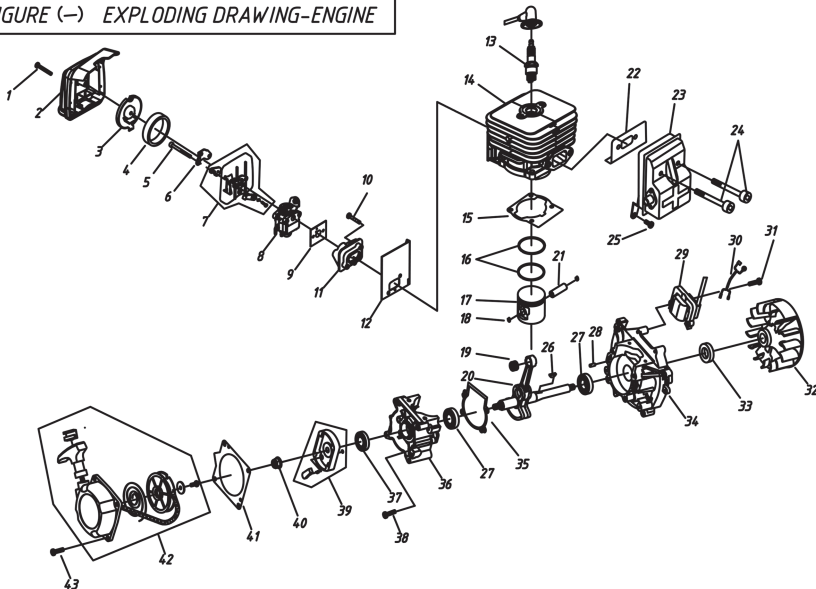

SER.NO	PART NAME	PART NO.	QTY.	SER.NO	PART NAME	PART NO.	QTY.	SER.NO	PART NAME	PART NO.	QTY.
1	SCREW M5×30	GB/T9074.4	1	18	"E" clip	1E40F-03.02.01	2	35	GASKET-CRANK CASE	1E40F-5.8-4	1
2	AIR FILTER COVER	1E40F-5B-1	1	19	NEEDLE BEARING	1E40F-5.4-2	1	36	CRANK CASE-REAR	1E40F-5.8-2	1
3	INSIDE COVER	1E40F-5A.1-2	1	20	CRANK SHAFT	3WB-900	1	37	SEAL	1E36F.2	1
4	AIR FILTER	1E34F.1-1	1	21	PISTON PIN	1E46FP.6-3	1	38	SCREW M5×30		4
5	SCREW M5×55		2	22	GASKET-MUFFLER	1E40F-5-5	1	39	STARTER REEL	1E40F-5.7-1	1
6	BUFLER	1E40F-5A.1.2	1	23	MUFFLER	1E40F-5.2	1	40	NUT M8	GB/T6170	1
7	AIR FILTER BASE	1E40F-5A.1	1	24	SCREW M6×60		2	41	GASKET	1E40F-5-10	1
8	CARBURETOR	1E40F-5B-2	1	25	SCREW M5×12	50845	1	42	STARTER ASSEMBLY	1E40F-5.11	1
9	GASKET-CARB	1E40F-5A-1	1	26	KEY 3×13	50012	1	43	SCREW M5×20		4
10	SCREW M5×25	50535	2	27	MAIN BEARING	6202/P5	2				
11	CARB-ADAPTOR	1E40F-5A.2	1	28	PIN 5×12	GB119	2				
12	GASKET-ADAPTOR	1E40F-5B-3	1	29	IGNITION MODUL	1E40F-5B-5	1				
13	SPARK PLUG	AT4117 Champion C.80	1	30	STOP WIRE	EB430-21	1				
14	CYLINDER	1E40F-5B-4	1	31	SCREW M5×20		2				
15	GASKET-CYLINDER	1E40F-5-6	1	32	FLY WHEEL	1E40F-5.3	1				
16	PISTON RING	1E34FP-3Z.3-5	2	33	SEAL	1E40F-5.9	1				
17	PISTON	1E40F-5.4-1	1	34	CRANK CASE-FRONT	1E40F-5.8-1	1				

FIGURE (C) EXPLODING DRAWING

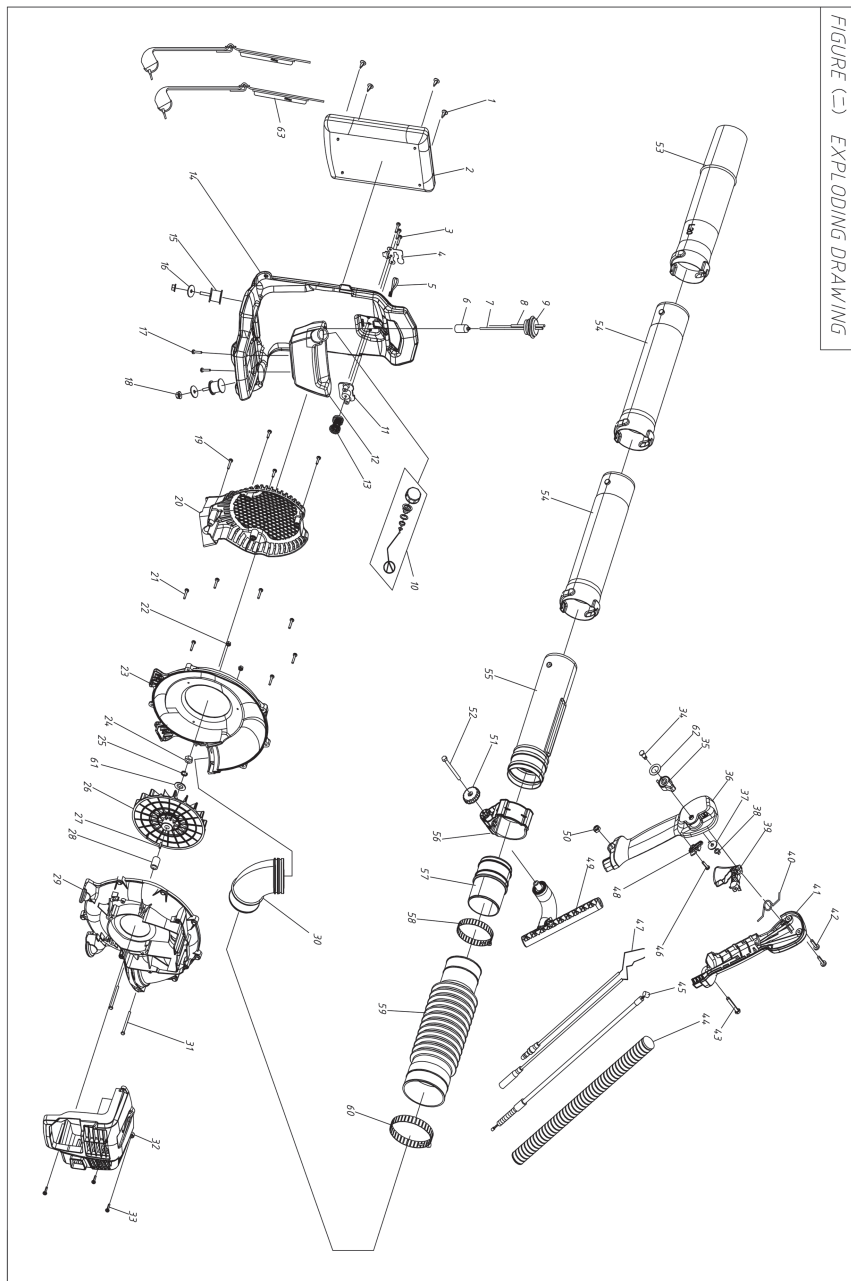

Bill of Materials

1. Five-Section Air Duct
2. Instruction Manual
3. Extended Warranty Card
4. 0.5L 2-Stroke Oil Mixing Bottle
5. Throttle Handle Base
6. Large Hose Clamp
7. Small Hose Clamp
8. 17-19mm 4-Way Spark Plug Socket
9. M5 Hex Key
10. M6 Hex Key

