



Flipside® | K-15996

Four-function showerhead, 2.5 gpm

Features

- Flipstream® technology uses a single sprayhead for four unique, experiential spray patterns; Koverage™, Kotton™, Komotion™, and Kurrent™
- Changing sprays is as easy as turning the head on its axis
- 2.5 gpm (9.5 lpm) maximum flow rate
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System



Codes/Standards

ASME A112.18.1/CSA B125.1

Technical Information

All product dimensions are nominal.

Flow Rate

Shower/Rainhead Rated 2.5 gpm (9.5 l/min)

Maximum Flow:

Handshower Rated Maximum 2.5 gpm (9.5 l/min)
Flow:

Recommended Products/Accessories

K-23723 Faucet cleaner


K-7395 Shower arm and flange, 5-3/8" long

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



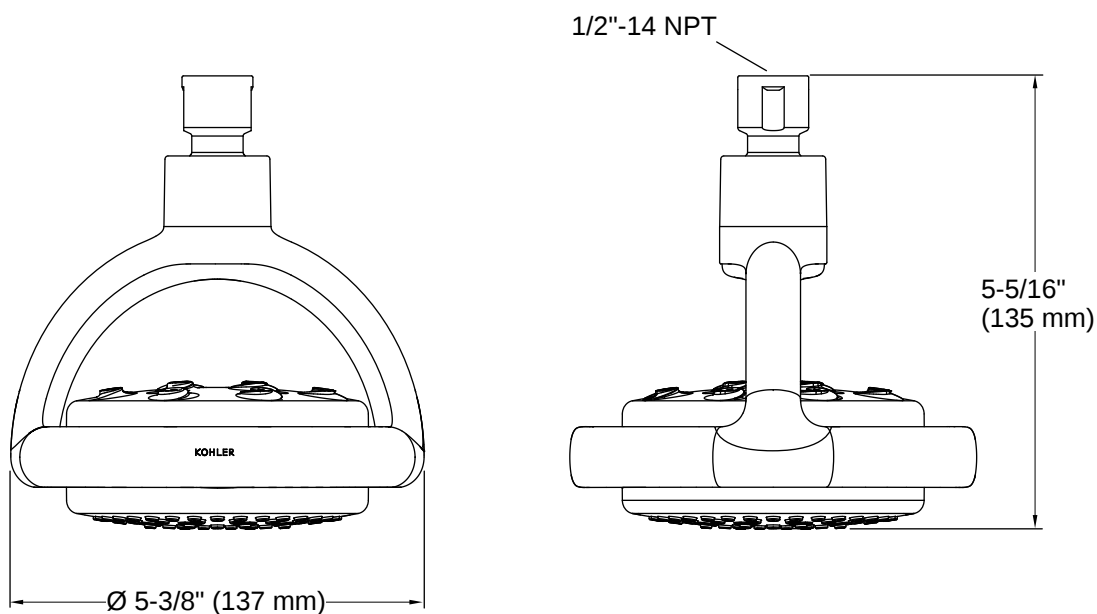

Installation

- 1/2" -14 NPT connection
- Shower arm and flange sold separately

Installation Notes

Install this product according to the installation instructions.

