



## INSTRUCTION MANUAL

**NOTICE:**

IMPORTANT, KEEP FOR FUTURE REFERENCE PLEASE READ CAREFULLY.

IF YOU HAVE ANY CONCERNS ABOUT THE PRODUCT, PLEASE FEEL FREE TO CONTACT US BEFORE YOU LEAVE A REVIEW.

---

**CAUTION:**


1. The installation requests a professional electrician to operate. Please make sure the installation environment ventilating and dry.
2. Wearing gloves during installation to prevent yourself from scratching the fixtures. Be sure the power has been turned off before operation.
3. Make sure the fixture is away from corrosive chemicals and air such as acid and alkali. Clean the fixture by wiping it with a dry rag.
4. Do not touch the light source when the fixture is turned on or look directly at the lit light source. Keep flammable materials away from the light fixture.
5. To reduce the risk of fire, electrical shock, and personal injury, always turn off and unplug the fixture and allow it to cool before replacing the light.
6. Live wire (L) is brown, neutral wire (N) is blue, and the ground wire is yellow.

**STEP-BY-STEP INSTALLATION (refer to fig. 1)**

1. Shut off the power at the circuit breaker and remove the existing fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts in a clear area, Be careful not to lose any small parts necessary for installation.
3. Adjust the steel wire length to satisfy your requirement of light fixture height. Fix the height of the wire with screws. (refer to fig 4)
4. Fix the height of electric wire with nut.
5. Remove the mounting screw from the light fixture.
6. Secure bracket to the junction box using junction box screw.
7. Connect the transformer: One side of the transformer is three-color wire, it need to connected with DC plug wire. (refer to fig 5)
8. Connect the blue wire (N) from the light fixture to the white supply wire (N) from the junction box using a wire connector.  
Connect the brown wire (L) from the light fixture to the black supply wire (L) from the junction box using a wire connector.
9. After wires are connected, tuck them carefully inside the junction box.
10. Mount the canopy onto the bracket and secure it with the mounting screw.
11. Secure the electric wire with the mounting screw. (refer to fig. 4)
12. Turn on the power, check whether the light fixture works normally or not.
13. Ensure the light fixture work normally, then install the Glass and crystal. There are three sizes of the crystals: A/B/C, Use metal hooks to hold transparent crystal. Inserting them to the light fixture in the order Place.

**HEIGHT ADJUSTMENT(refer to fig. 2.3)**

NOTE: It is recommended to make any major adjustments to the height of the light fixture before installation. Extend or shorten the wire by press the metal collar.

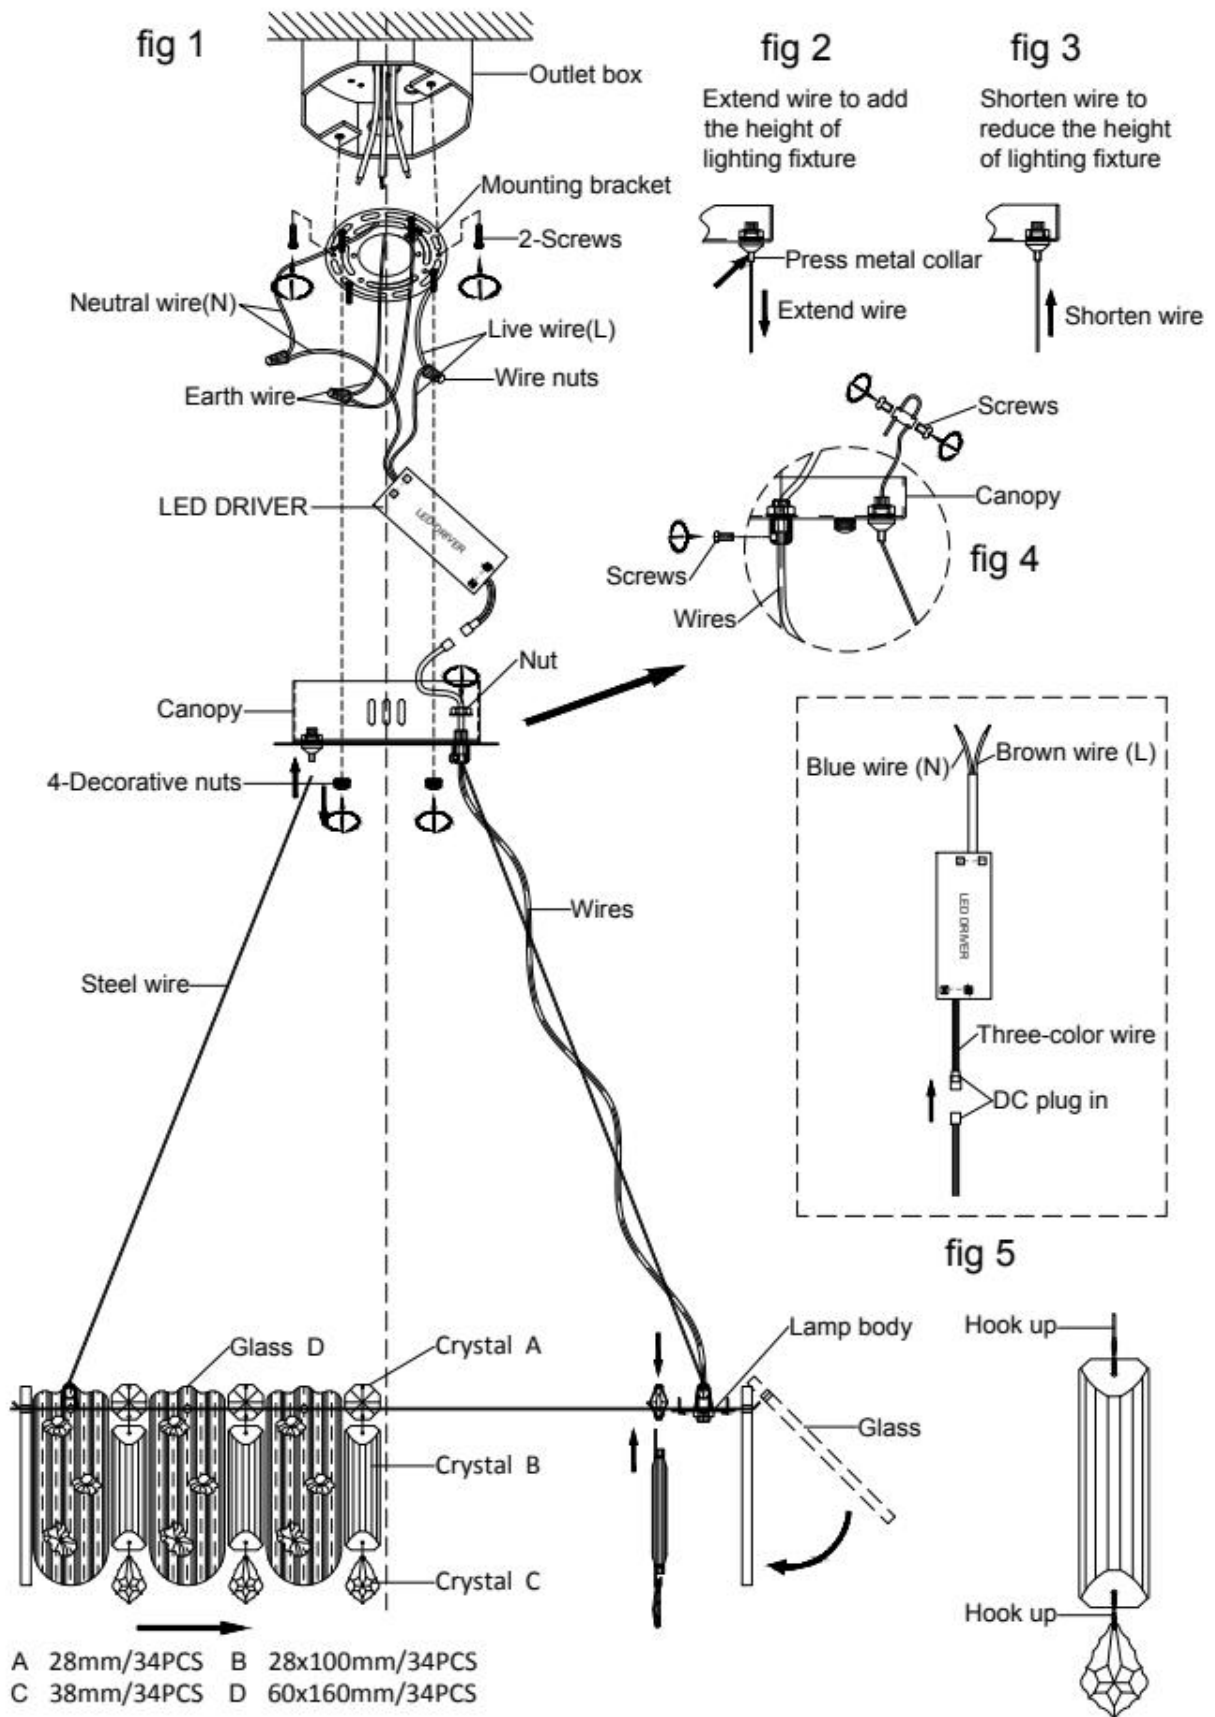

**Package List:**

lamp body	1	PCS
A 28mm	1	BAGS
B 28*100mm	4	BAGS
C 38mm	1	BAGS
D 60*160mm	34	PCS
Led driver	1	PCS
Screw pack	1	BAG
Hook up	1	BAGS
Mounting bracket	1	PCS
Decorative nuts	4	PCS
Canopy	1	PCS
Accessories Bag	1	BAG
Installation Instructions	1	PCS

※The package include extra crystal pieces. The Number of Spare Accessory:

A 28mm	2	PCS
B 28*100mm	1	PCS
C 38mm	2	PCS
D 60*160mm	1	PCS



