

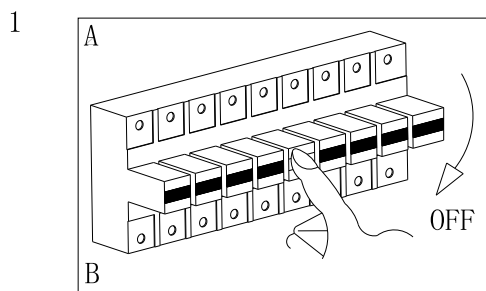



HSH-01-005A

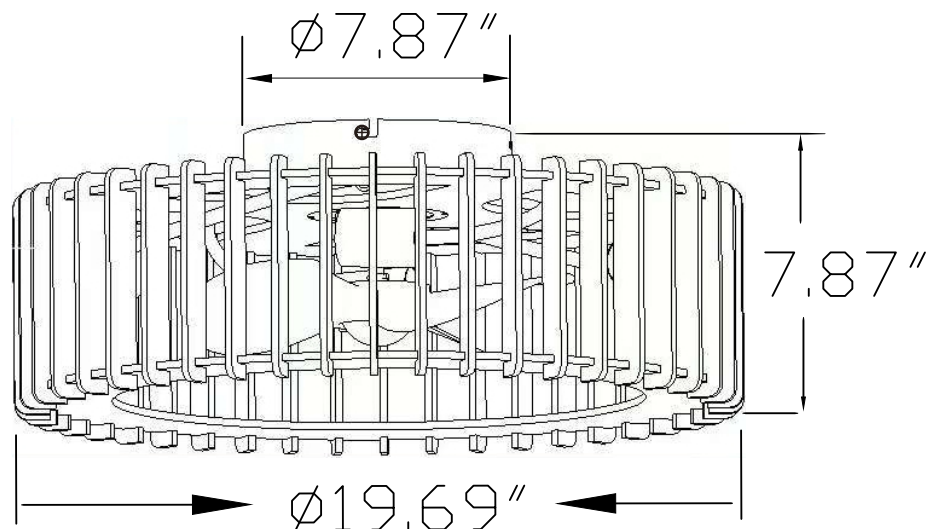


1
please confirm that the voltage matches the product, and turn off the power at the installation location to ensure safety.

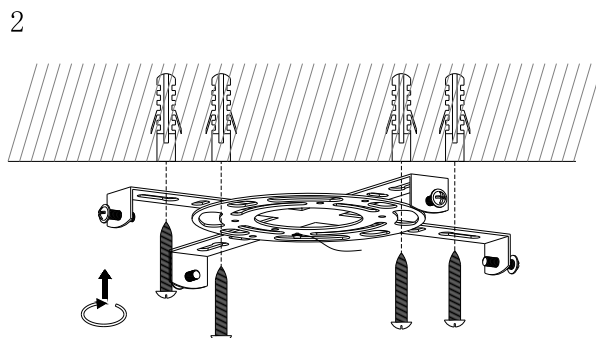


2
Securely attach the mounting plate to the ceiling.

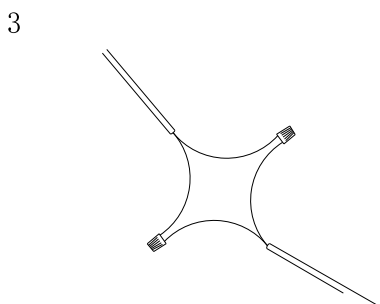


3
Connect the lamp driver input to the power source correctly and securely.

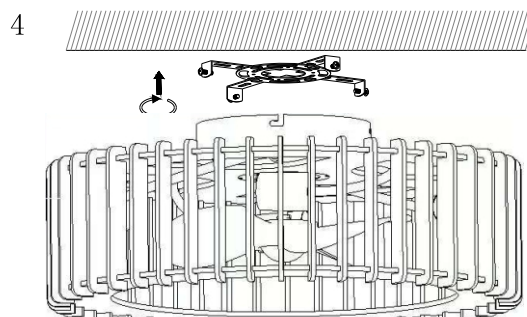

4
Rotate the lamp body to align the screws on the mounting plate with the holes on the leftmost hub.

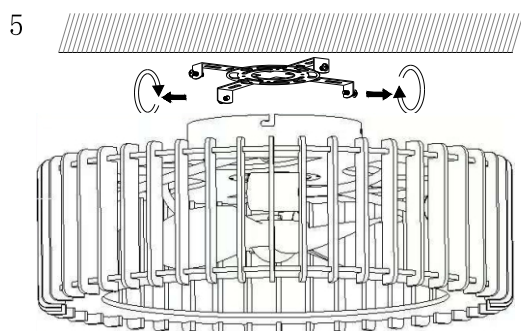

5
Tighten the four screws on the mounting plate to ensure the fixture is securely installed.

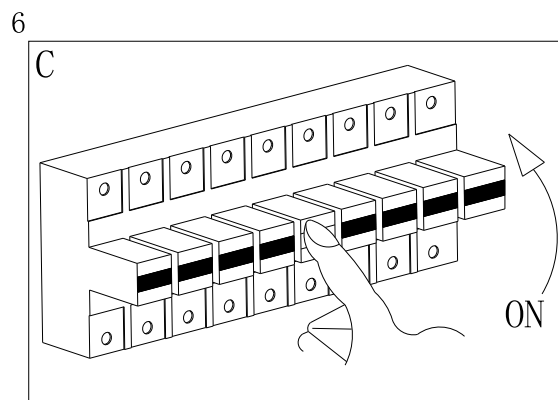

6
Turn on the power switch.

Fan lamp remote control instructions

Remote control key function:

:Main switch

:Light switch

:rotation

:Natural wind

:reversal

:Fan off


:Fan gear key Gear 1-6 Forward

:Fixed time 1 hour

:Fixed time 2 hours+**pair key**

:Fixed time 4 hours

Remote control battery : No. 7 1.5V*2

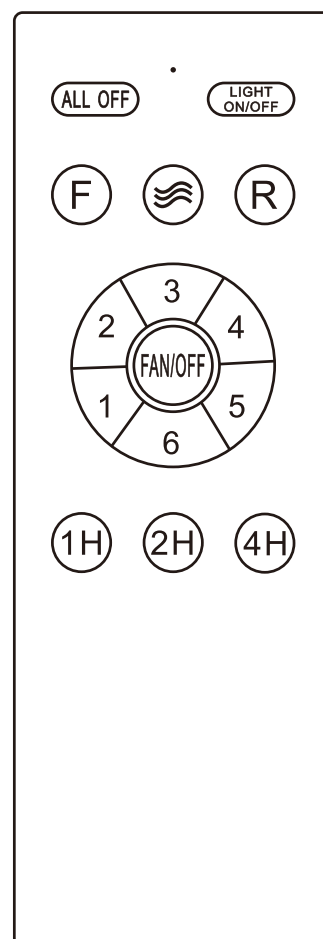

Product introduction :

1. This product adopts 433 wireless digital technology ,

Remote control one-to-one control ,

The workpiece can be controlled from any angle within the allowable space ,

Not limited by direction , Simple and convenient operation ,

Strong anti-interference ability.

2 . Remote control instructions :

① . If the remote control is not used for a long time , Please remove the battery.

② . Remote control matching code :

Turn on the power ,

Press the pair code button within 5 seconds of the light on ,

When you hear two "tick" sound or the light flashes, the code matches successfully.

If you need to match the code again , You need to wait 30 seconds before turning on the power and repeat the above operation.

warning :

This electronic switch product needs to be operated by professionals during installation.

Remote trigger electronic switch ,

The radio frequency of the remote control transmitter is 433M

