

29R • 21" ADA Solid Door Refrigerator • ADA Series

FEATURES & BENEFITS



BLACK  
SOLID



BLACK  
SOLID (LOCK)



WHITE  
SOLID



WHITE  
SOLID (LOCK)

PERFORMANCE	<ul style="list-style-type: none"><li>• Volume of 3.3 cu ft holds up to 35 bottles (12 oz) or 48 cans (12 oz)</li><li>• Mechanical Dial Control is conveniently located on the grille</li><li>• Temperature range: 34°F - 45°F</li><li>• Passive cooling system</li></ul>
INTERIOR/EXTERIOR	<ul style="list-style-type: none"><li>• Three removable tempered glass shelves</li><li>• Three fixed shelves in door</li><li>• Door swing is field reversible for non-lock models</li><li>• Door lock models are available, and must be ordered hinge specific</li></ul>
INTEGRATION	<ul style="list-style-type: none"><li>• Unit is designed to be built-in or can be freestanding</li><li>• Non-lock models accepts a 1/4" custom insert panel</li><li>• Available in the following finishes: Black or White</li></ul>


MODEL DETAILS

Model	Voltage/Hz	Door Swing	Finish	Shipping Weight
U-29RB-00A	115 / 60	Field Reversible	Black Solid	89 lb
U-29RB-13A	115 / 60	Right-Hand Hinge	Black Solid (Lock)	89 lb
U-29RB-15A	115 / 60	Left-Hand Hinge	Black Solid (Lock)	89 lb
U-29RW-00A	115 / 60	Field Reversible	White Solid	89 lb
U-29RW-13A	115 / 60	Right-Hand Hinge	White Solid (Lock)	89 lb
U-29RW-15A	115 / 60	Left-Hand Hinge	White Solid (Lock)	89 lb


## ADA Series • 21" ADA Solid Door Refrigerator • 29R

### DIMENSIONS

Dimensions shown apply to all finishes.

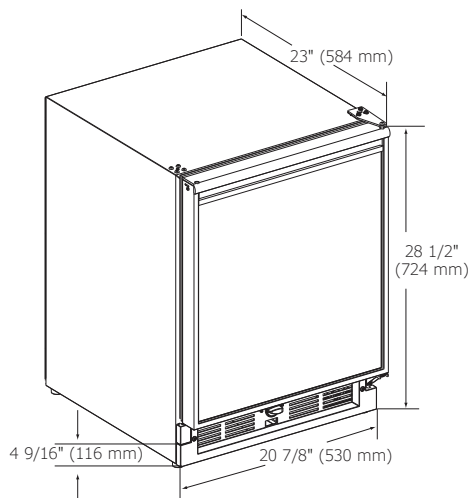

### CABINET CUT-OUT

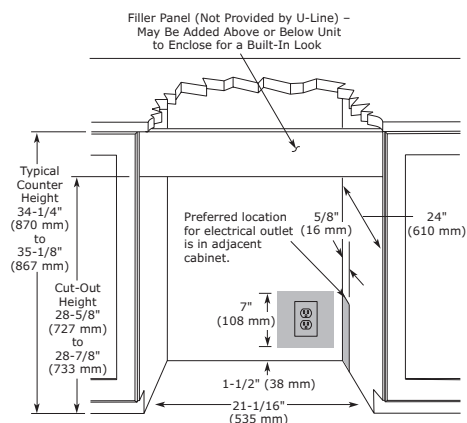

### INSTALLATION NOTES

Cutout includes the additional 1/4" width overall to ensure proper installation.

No additional clearance around sides, top or rear of unit is needed for ventilation.

Do not obstruct front grille air flow.

### SPECIFICATIONS

Model	29R
Amps: Running	1.2
Capacity: Bottle (12 oz)	35
Capacity: Can (12 oz)	48
Capacity: Volume (cu ft)	3.3
Control Type	Mechanical Dial
Dimensions: Product Depth	23" / 584 mm
Dimensions: Product Height	28 1/2" / 724 mm
Dimensions: Product Width	20 7/8" / 530 mm
Energy Consumption: Avg. Per Year	260 kWh
ENERGY STAR / CEE RATING	ENERGY STAR / Tier 1
Product Weight: Max	80 lb
Refrigerant Type	R600a
Sabbath (Star K Certified)	No
Temperature Range	34°F - 45°F

### COOLING SYSTEM



### ELECTRICAL REQUIREMENTS

This unit requires a grounded, polarized 115 VAC, 60 Hz, 15 A power supply (normal household current).