




# ASSEMBLY INSTRUCTIONS

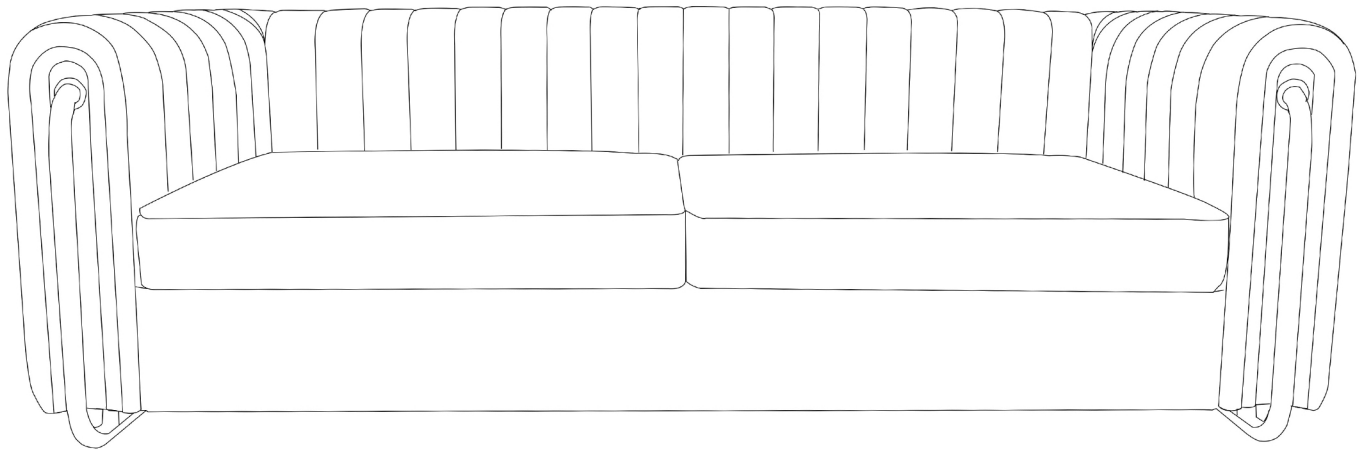


**A: Left Arm x 1pcs**

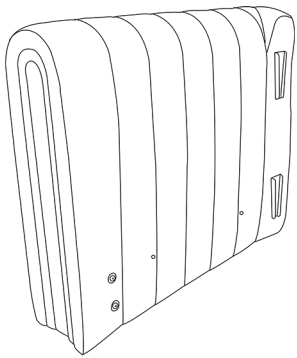


**B: Right Arm x 1pcs**

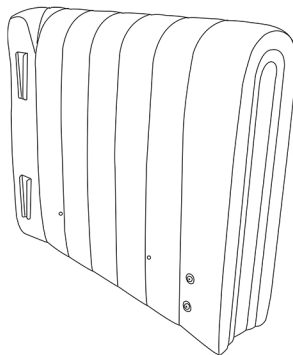

**C: Sofa Back x 1pcs**

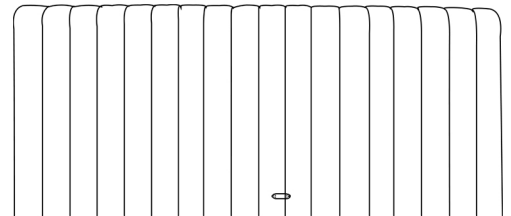


**D: Seat Cushion x 2pcs**

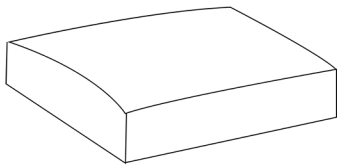


**E: Bottom Board x 1pcs**




**F: Front Board x 1pcs**




**G: Legs x 2pcs**

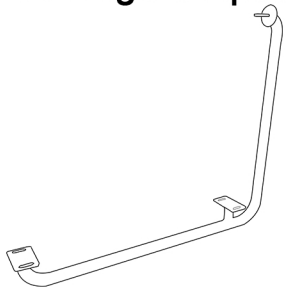


**H: Center Bar  
x1pcs**

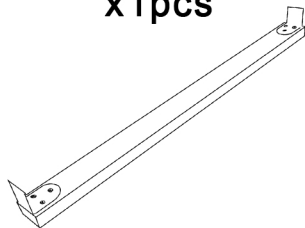


**I: Side Bar x2pcs**

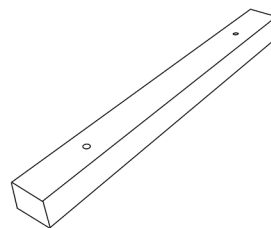


**J: Angle Bracket(L)  
x1pcs**




**K: Angle Bracket(R)  
x1pcs**




**L: M6\*20MM  
x16pcs**




**M: Washer x14pcs**




**N: M6\*70MM x4pcs**



**O: Hex Keys x1pcs**



**P: Mid Leg x1pcs**




**Q: Seat cushion covers x2pcs**




**Step 1 Install the metal leg step by step.**

- ①insert the long screw into the pre-drilled hole.
- ②Push the metal leg from the bottom up until there is no space at the bottom.
- ③install and tighten the screws.
- ④install the side bar.

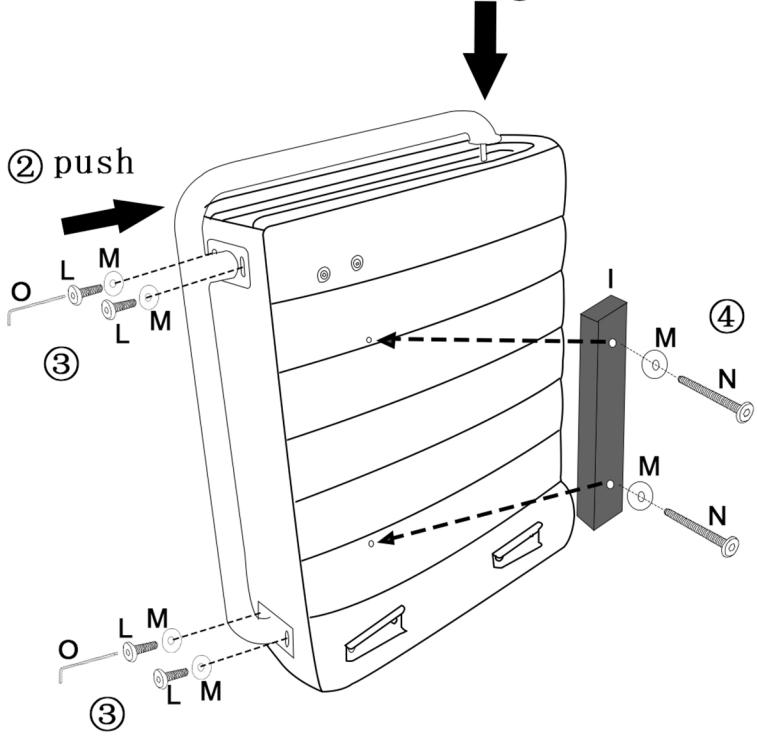


**Step 2 Install the metal leg step by step.**


- ①insert the long screw into the pre-drilled hole.
- ②Push the metal leg from the bottom up until there is no space at the bottom.
- ③install and tighten the screws.
- ④install the side bar.

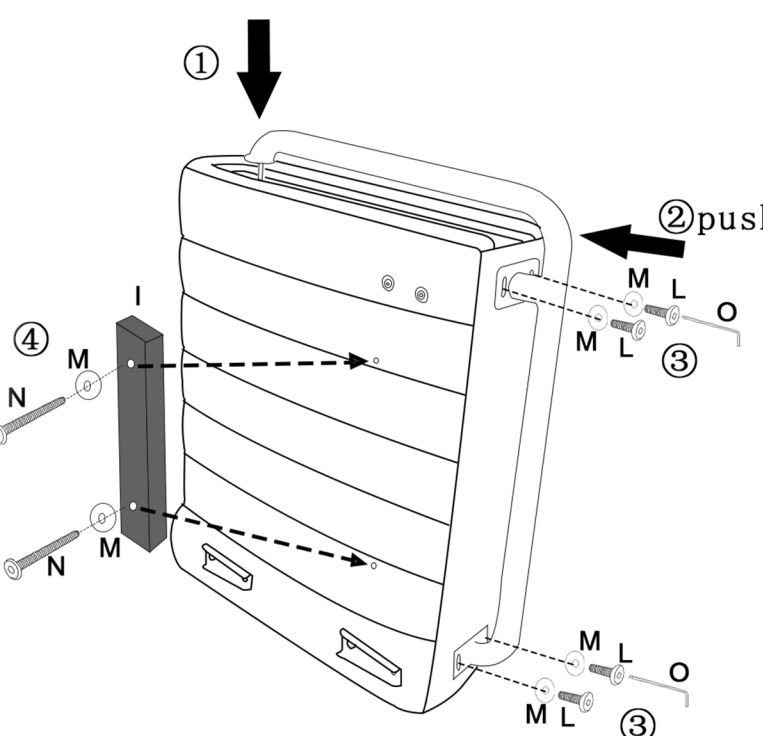


**Step 3. Insert the sofa back to both armrest as follow.**

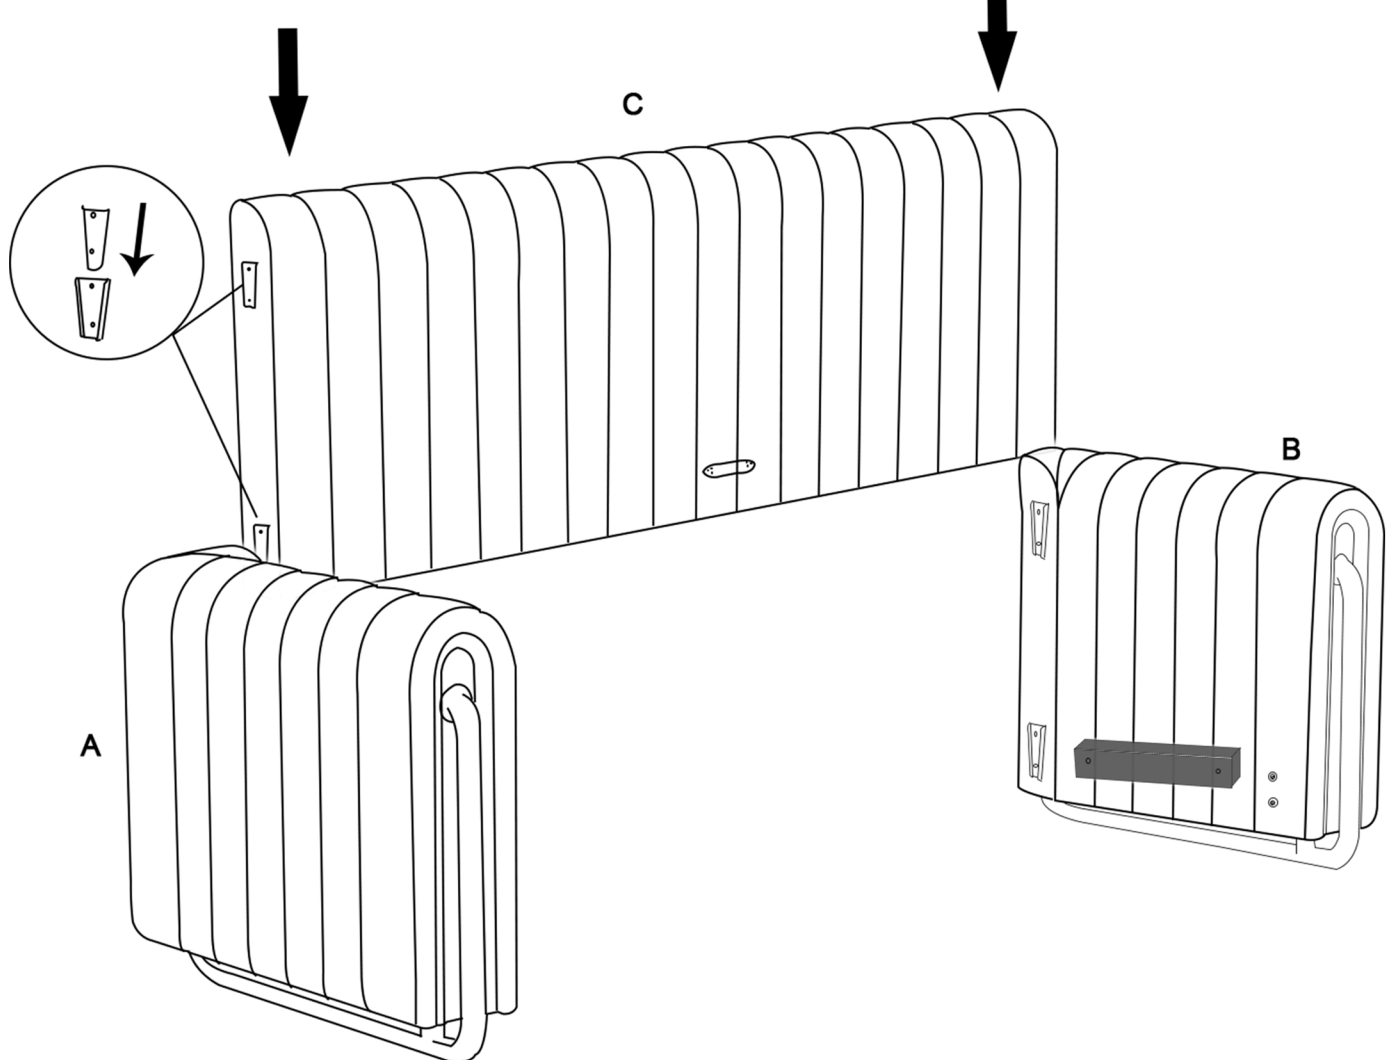


## How to identify the top and bottom of the front board

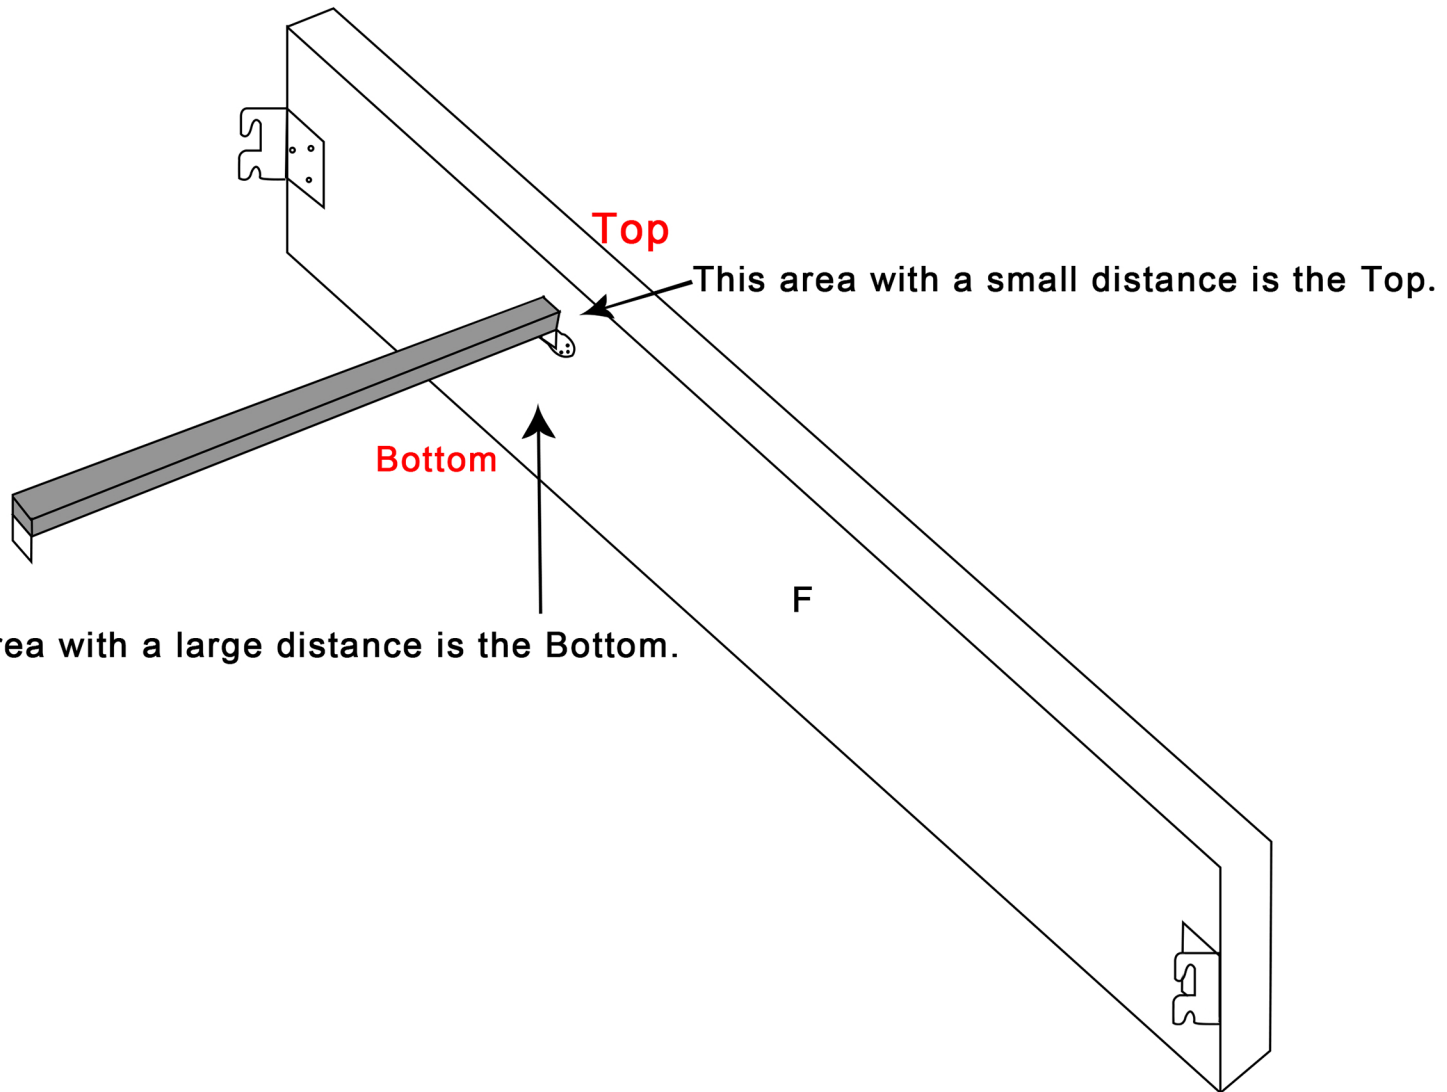


**Step 4. Install the front board and fasten to both armrests.**

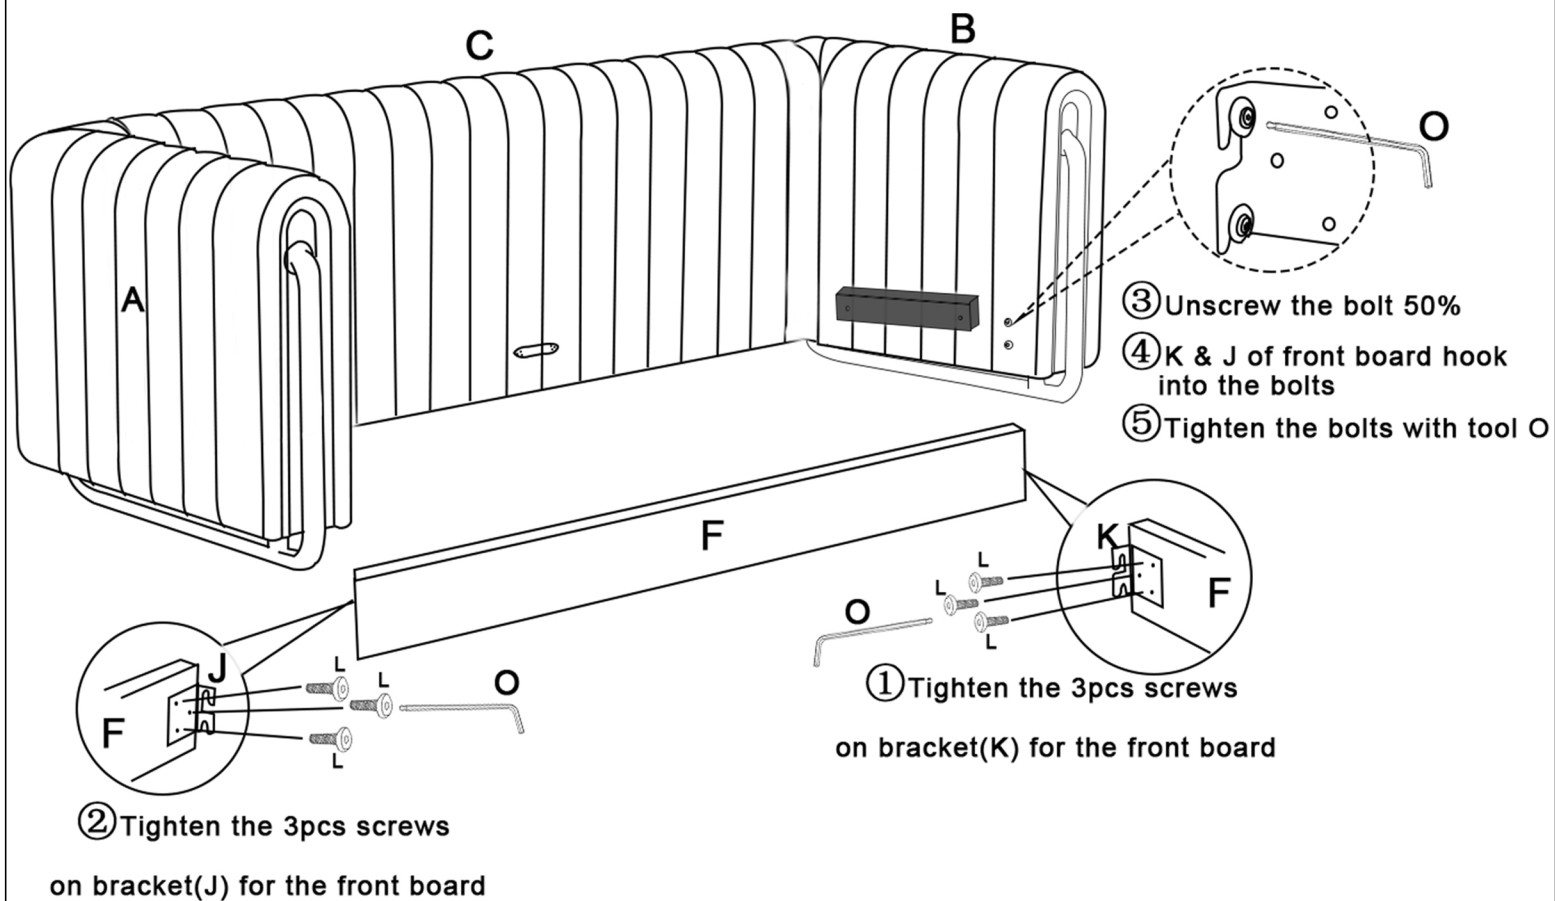


**Step 5. Install the mid bar as follow.**

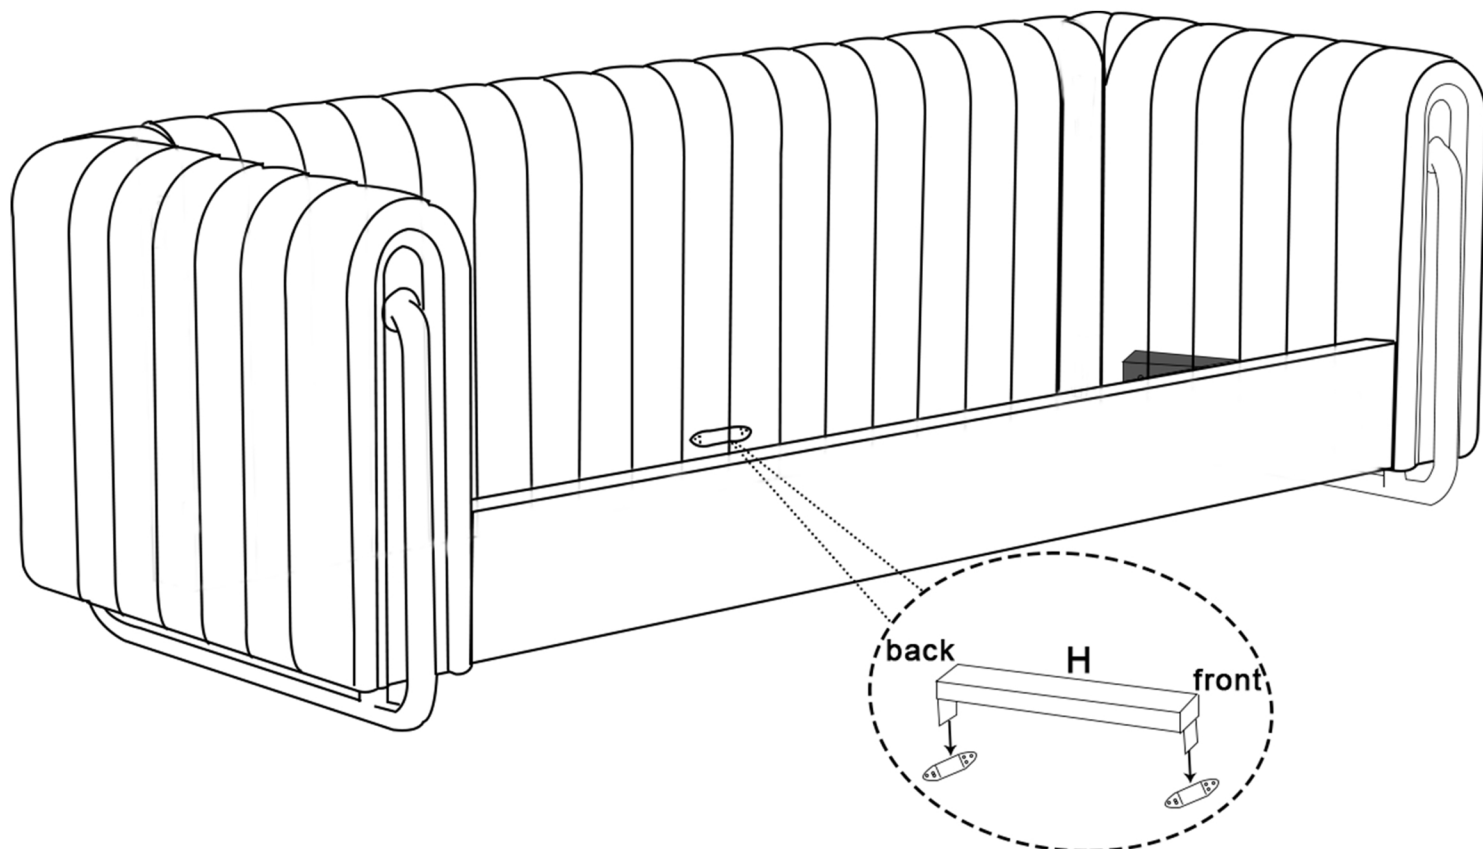


Step 6.Install the bottom board step by step.

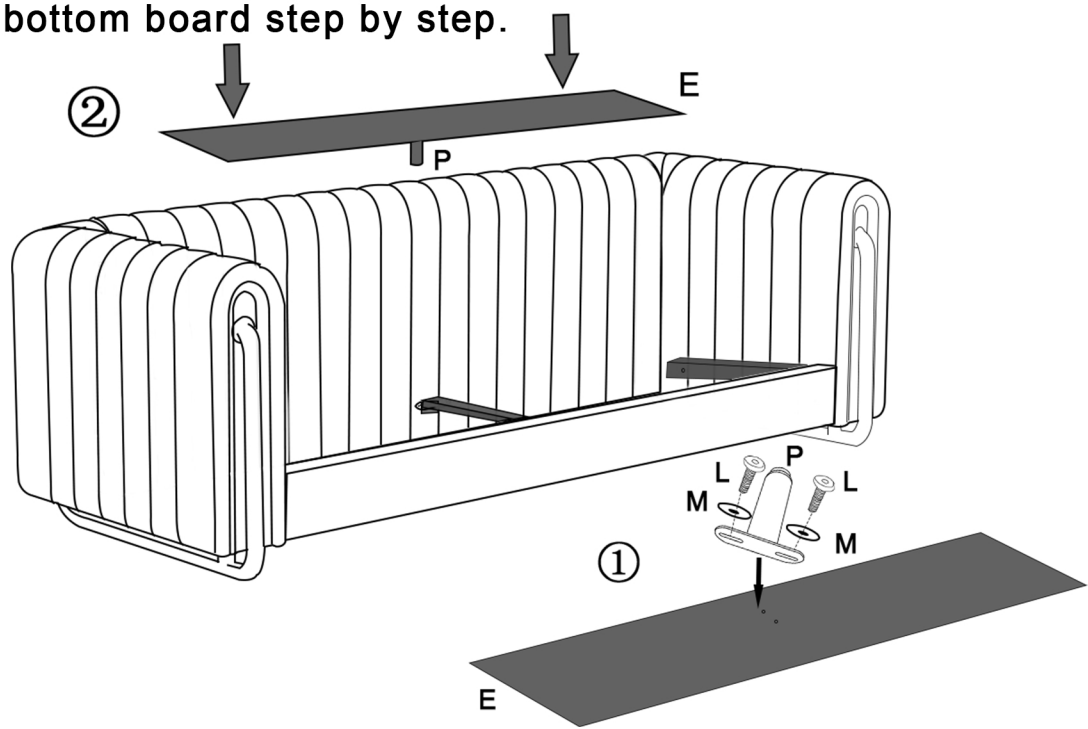

Step 7.Install the seat cushions.


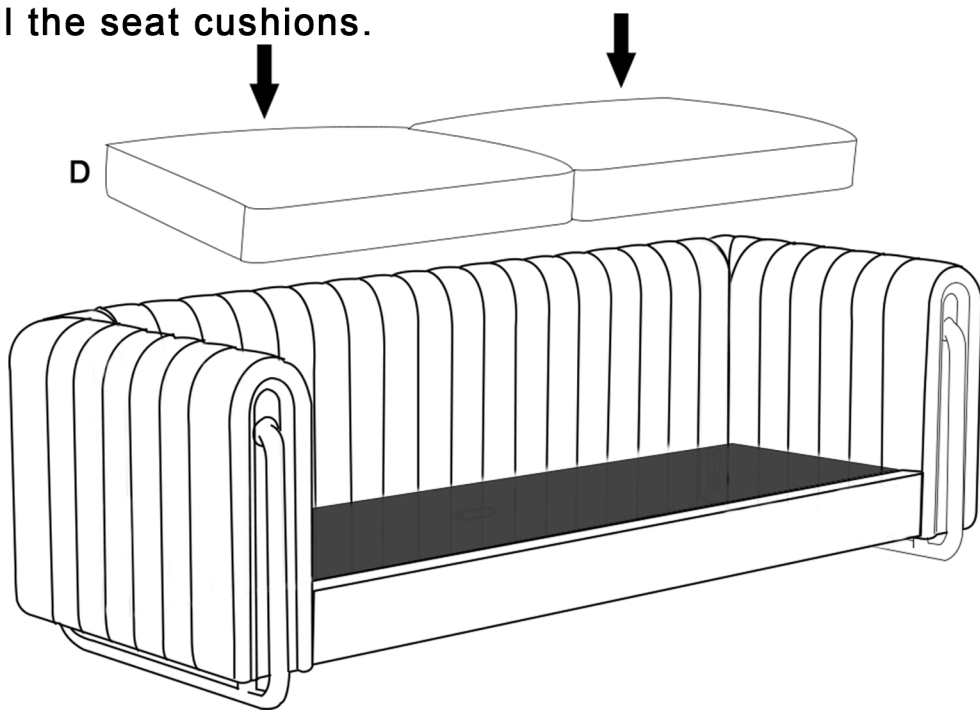


Step 8


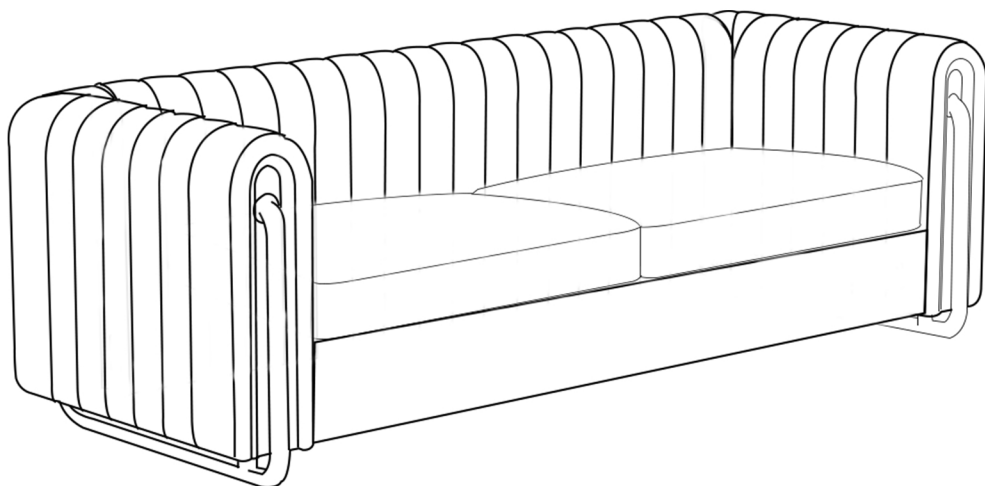


## How to install the cushions


Step 1. Open the plastic bag and remove the cushions foam.

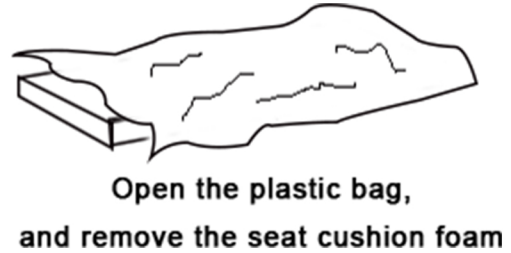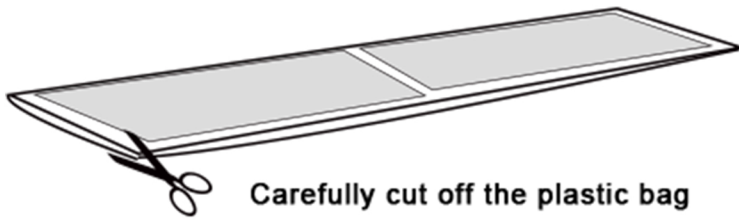

Step 2. Cover the fabric covers to all cushions foam. When you get the foam, you will see the RED words which side is the **top**, **front** and **back** as following.

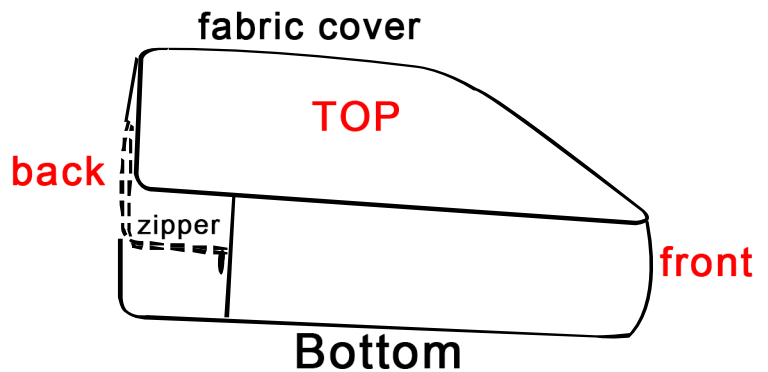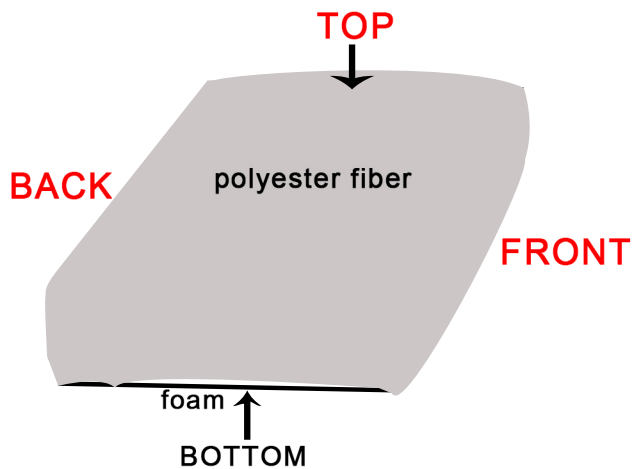

## How to tidy sofa seat cushion?

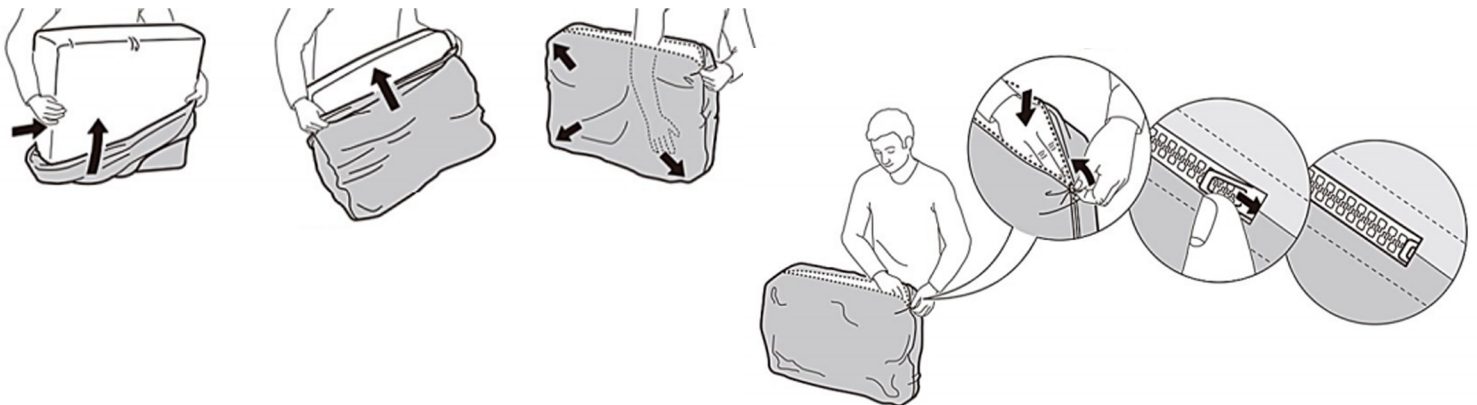

### TIPS

At the beginning all cushions are a little loose which is normal. Please allow at least 72 hours for all cushions foam to recover to its natural state after covering the fabric covers.