


LAVA2g 66,000btu's

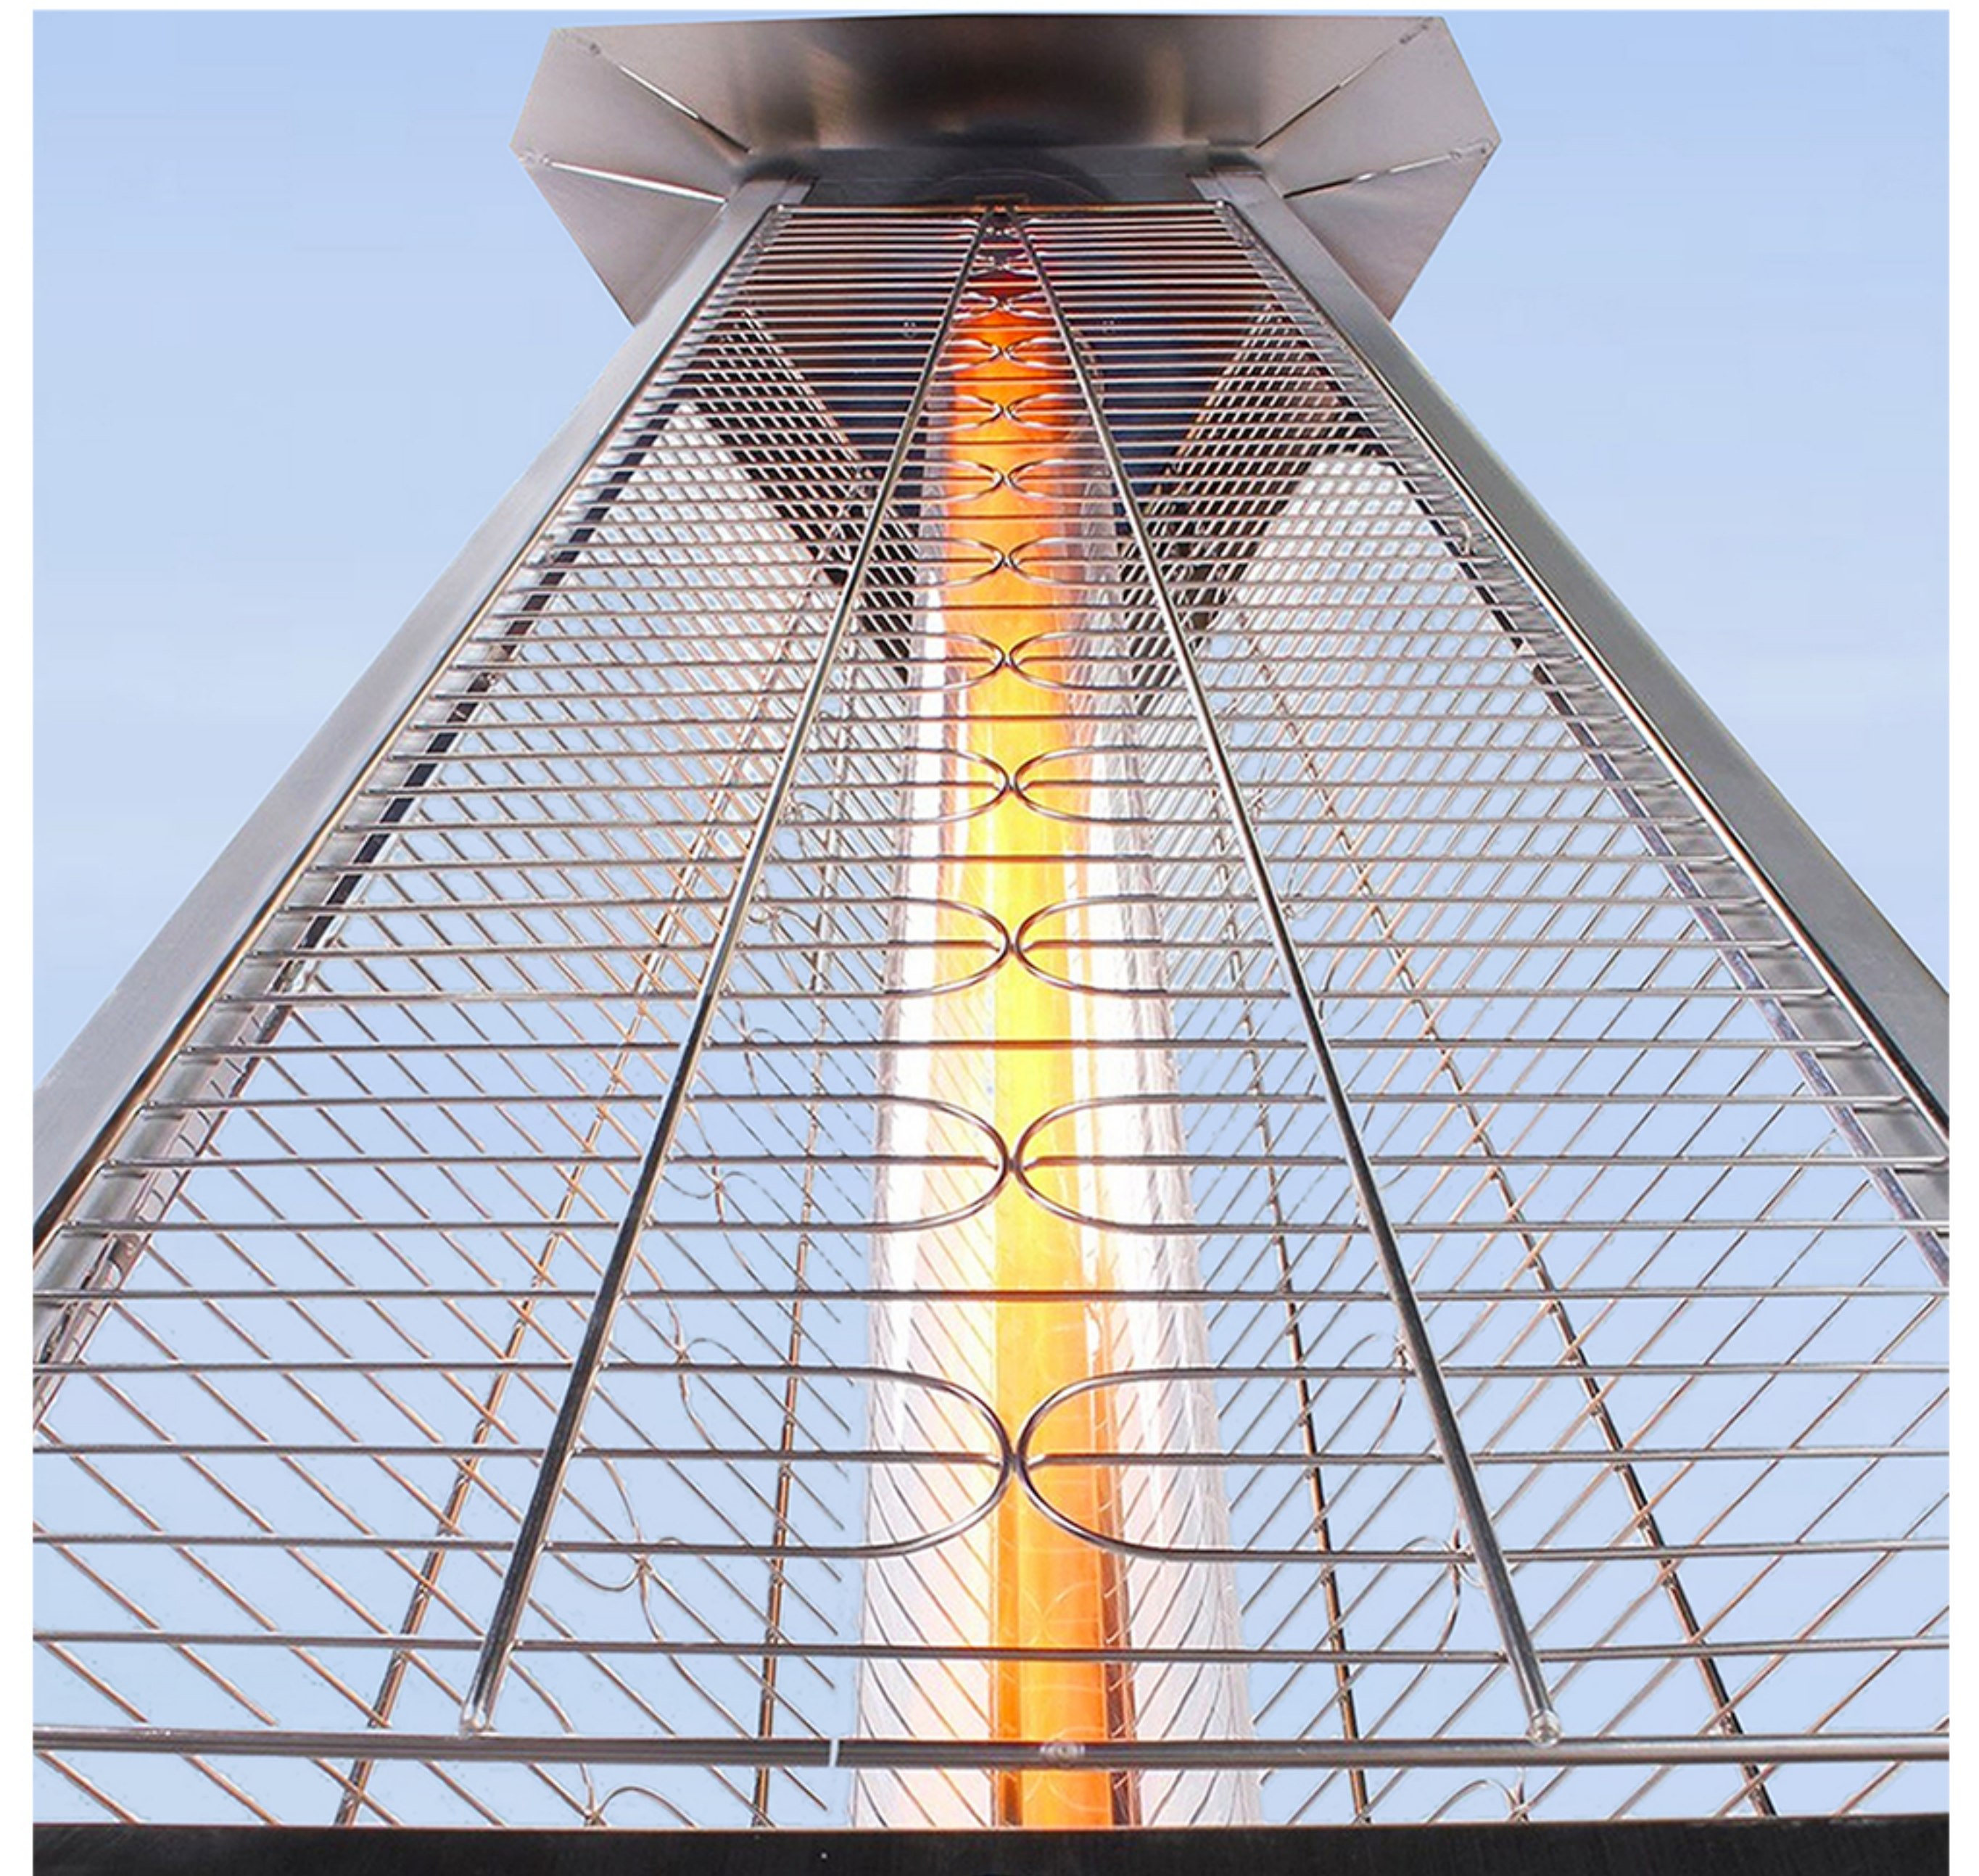

PRODUCTdescription

The 2G A-LINE-AL8RS is our 8 ft. Commercial Flame Tower Heater. The new A-LINE series features upgraded hardware, finishes and new eco-friendly heating options. Double baked powder coating over stainless steel as well as **304-grade hardware** make the A-LINE series a workhorse. With our industry first 5-stage eco-burner and upgraded **IR remote system** the A-LINE is the most technologically advanced heater on the market. A Borosilicate Glass tube encases our 4-foot adjustable **"Column of Flame"** that produces **66,000 BTUs** of continuous heat with Natural Gas connection or 8 hours of continuous use on a 20 lb. propane tank. The sleek 360-degree design provides superior heat distribution in a 25 square foot area. **Touch-to-Start Technology** accompanied with our Tilt Switch-Auto-Shutoff makes it safe, simple, and fast. The patented easy-snap magnetic door makes it easy to access the units' burner assembly. Available in supreme finishes and the only natural gas option on the market, makes this A-Line a need for your outdoor space.

PRODUCTfeatures

- Power Rating: 66,000 BTU
- Coverage Area: Approximately 25 sq. ft
- Consumption Rate: Up to 10 hours with Propane Tank (LP)
- 5 Year Limited Warranty
- Construction: Solid Steel & Aluminum
- Safety Features: Tilt Switch Auto-Shutoff

HEATradius



FUELtype



IGNITIONtype



PRODUCTmaterials

- Stainless Steel
- Aluminum
- Plastic
- Borosilicate Glass


INSTALLATIONinstructions

- Assembled
- Clearance Requirements:
24 in. (60.96 cm)(H) 36 in. (91.44 cm)(V)


PRODUCTcodes/standards

- ANS 283.26-2014
- CSA 2.37-2014

SHIPPINGdetails

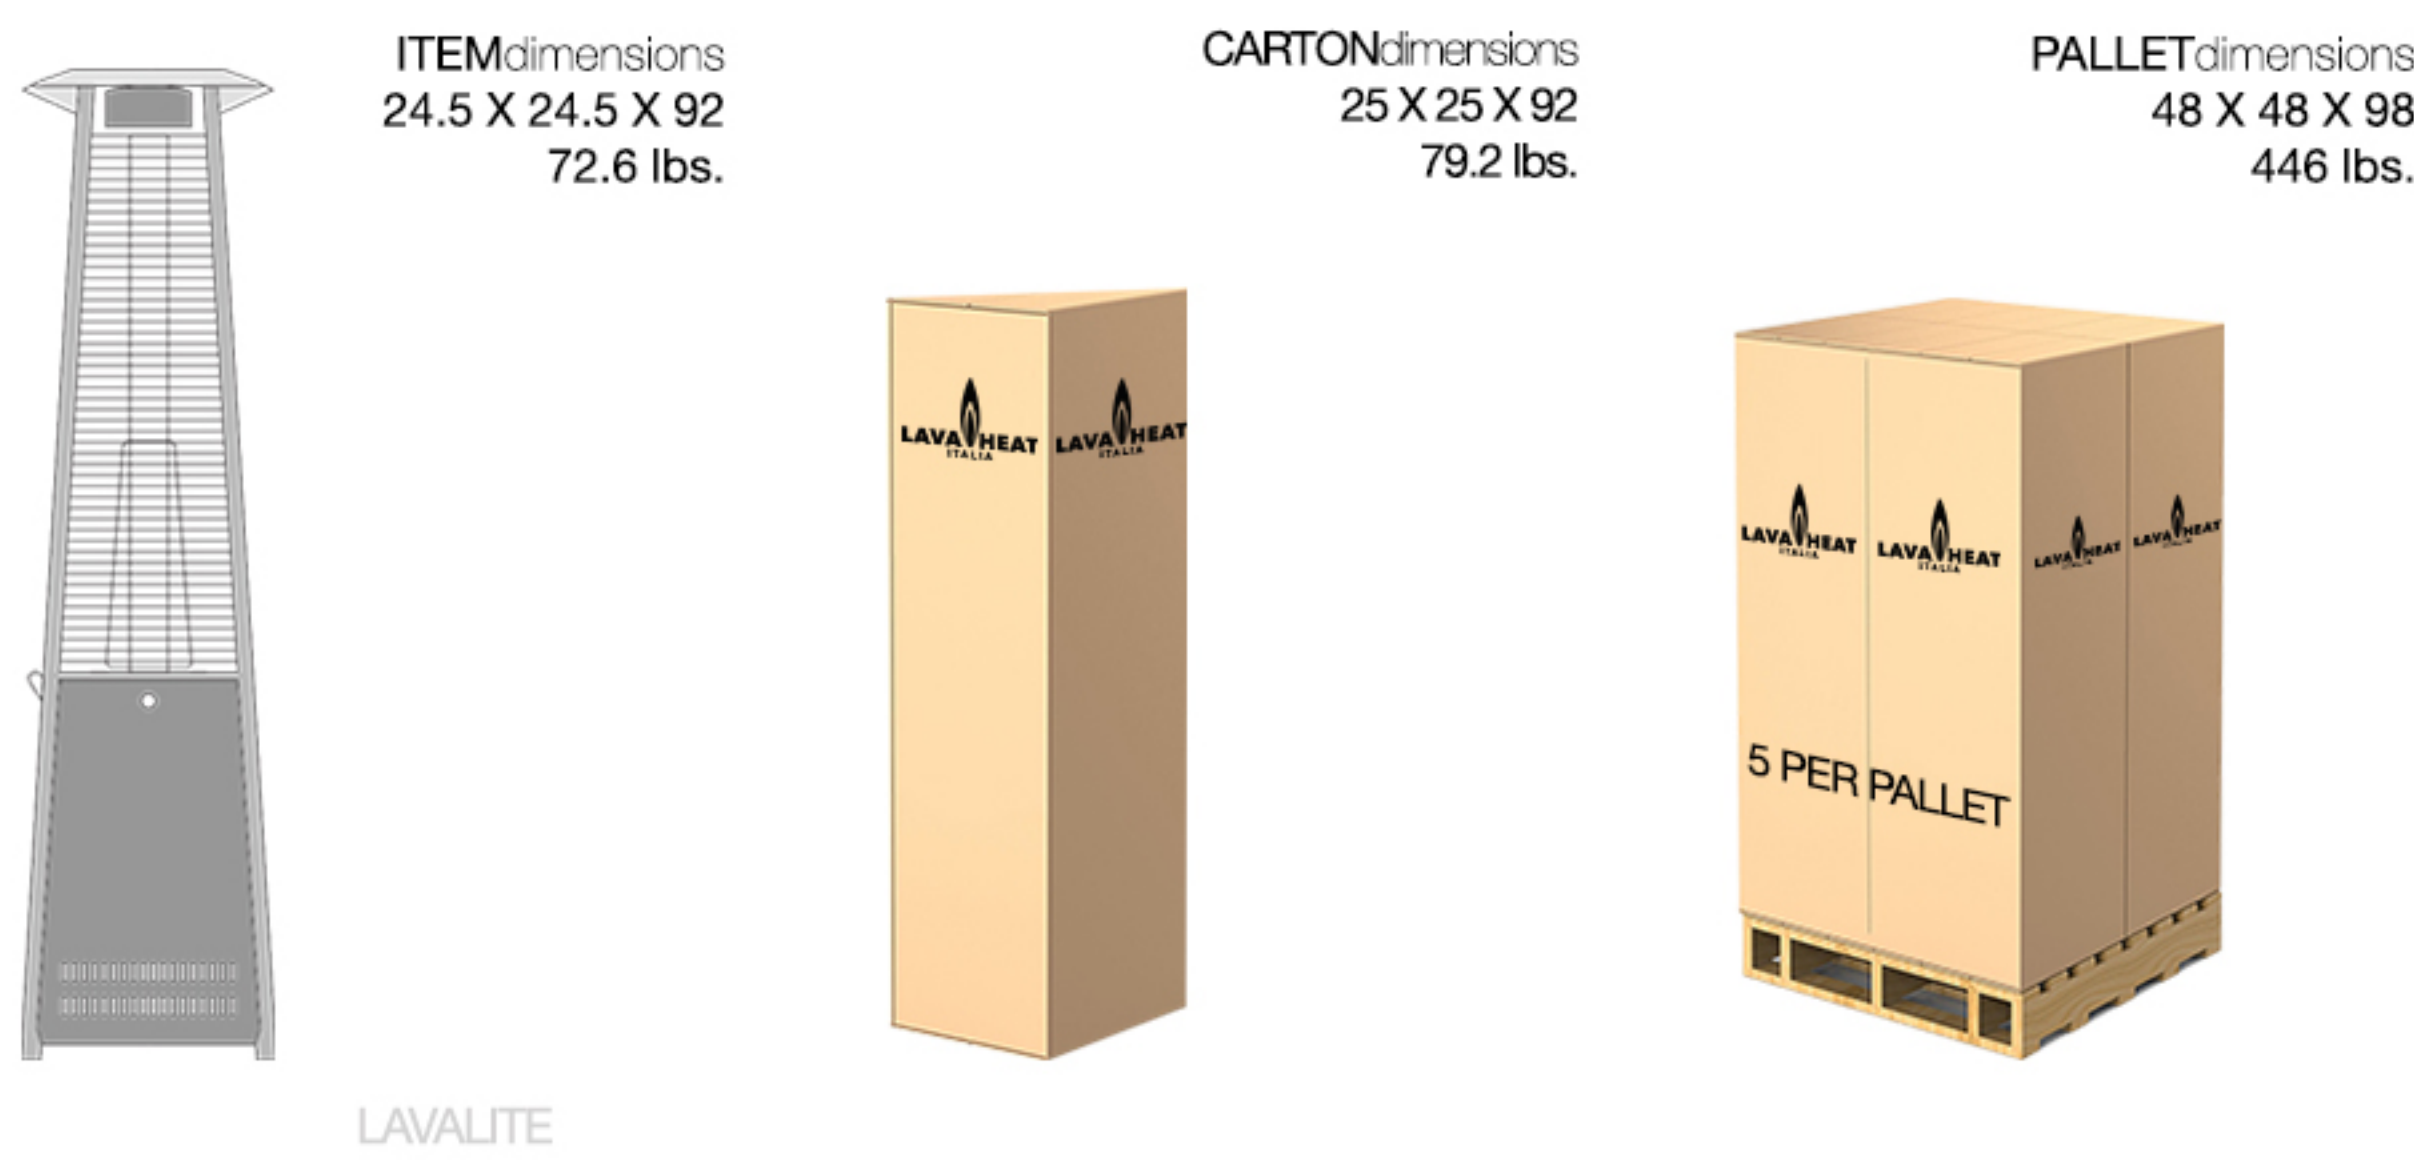

COLORoptions

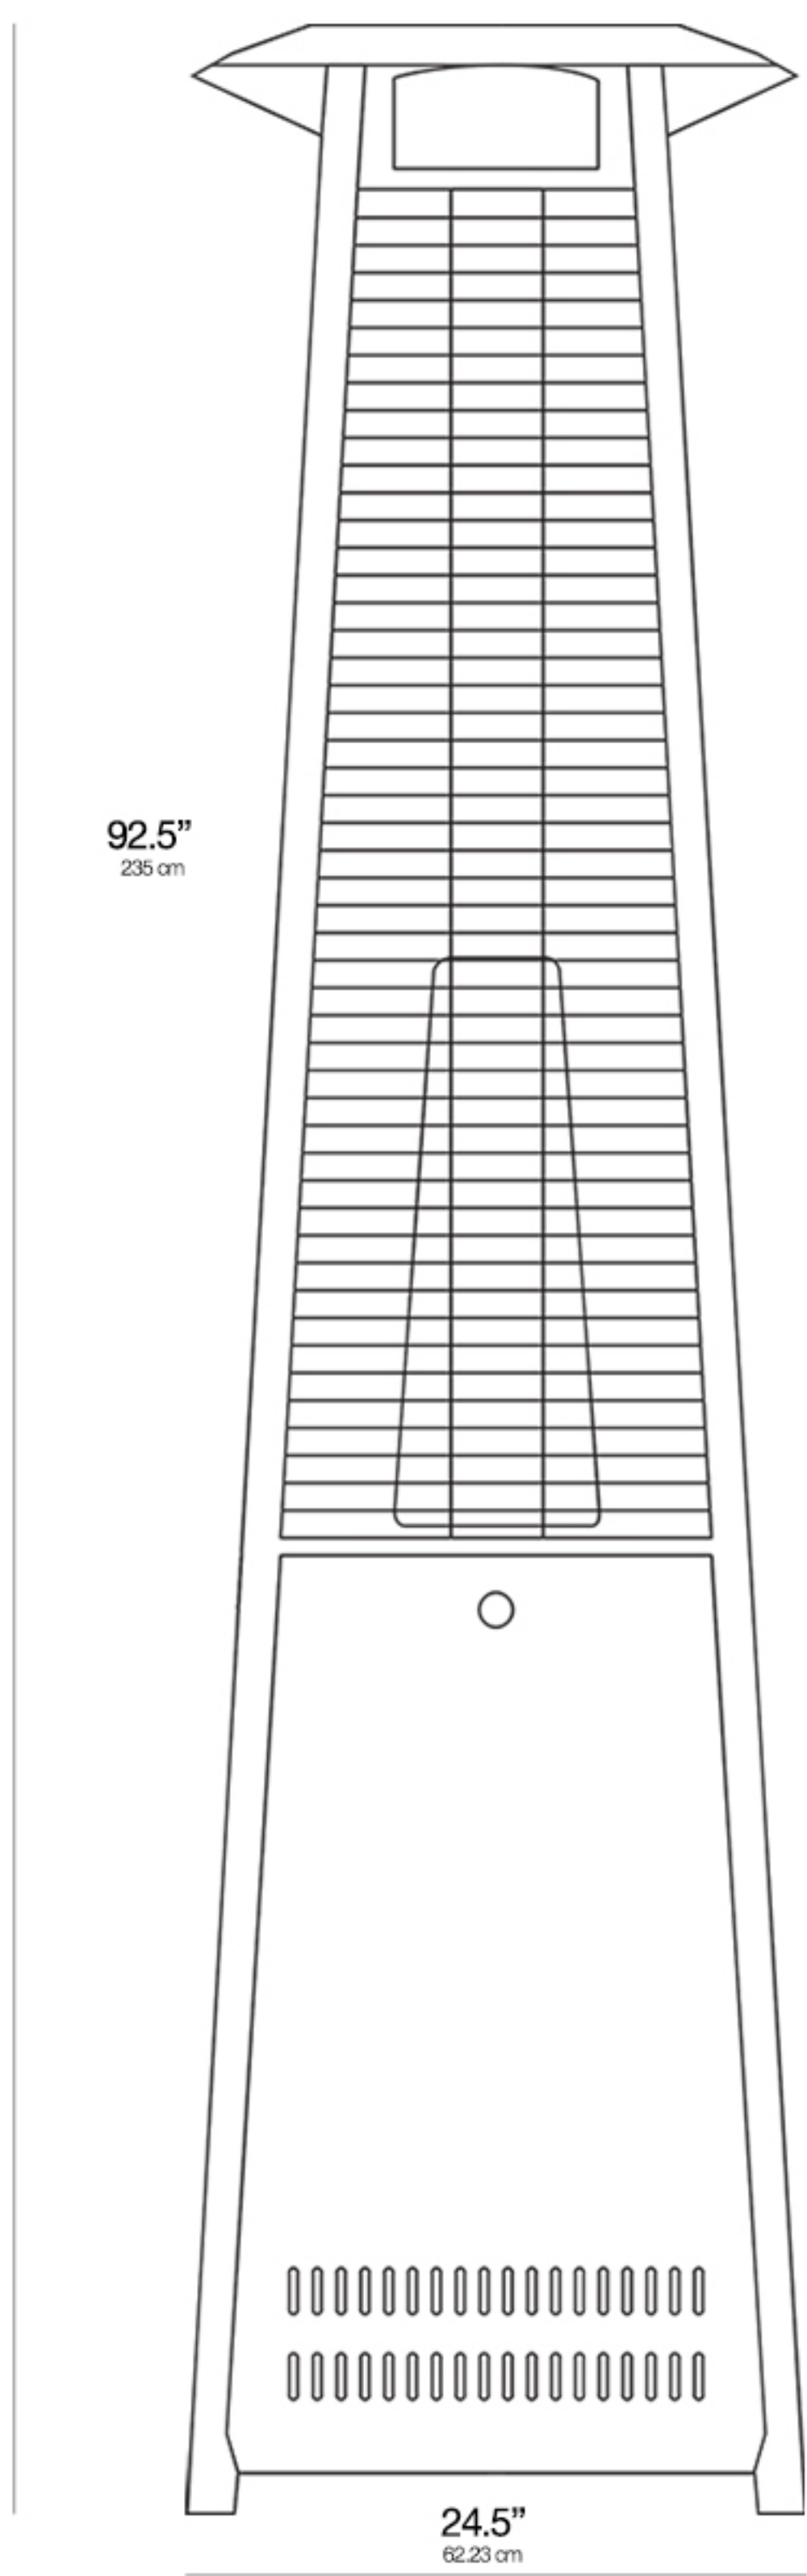

2g
66,000btu/s

PRODUCTspecifications

Certification	CSA
Height	92.5 in. (2.35 m)
Width (Diameter)	24.5 in (62.23 cm)
Weight	72.6 lbs. (32.93 kg)
Rated Heat Input	56,000 BTU/hr
Fuel	LP
Gas Supply	20 lbs. (9 kg) LP gas cylinder
Manifold	11' W.C. (28 cm)
Diameter of Injector	0.077 in. (1.9 mm)
Safety Features	Flame failure device, anit-tilt switch
Gas Supply Pressure	Max. 250 PSI, min. 5 PSI

OPTIONALaccessories

- AL8MPSCVR all-weather cover
- AL8MPSGLS borosilicate glass tube
- AL8MPSWHL whee- kit

PRODUCTwarranty

- 5.3.1 Commercial/Residentail
- see website for details:
<http://lavaheat.com/warranty-and-product-care/>

FINISHoptions

