



INSTRUCTION MANUAL

EMAIL |



1 PERSON ASSEMBLY



AROUND MIN ASSEMBLY


PARTS

Estimated assembly time **10-15minutes**




A X 1	B X 1	C X 1	D X 4	E X 4	M10 x 160 F X 4
M10 x 25 G X 4	M10 H X 8	I X 4	J X 1	K X 4	L X 1
M X 1	N X 1	O X 1	P X 1	M6 x 12 R X 1	M8 x 46 S X 1
T X 1	U X 1	V X 1	W X 1	X X 1	M4 x 16 Y X 1
M5 x 47 Z X 1					


PRODUCT ASSEMBLY

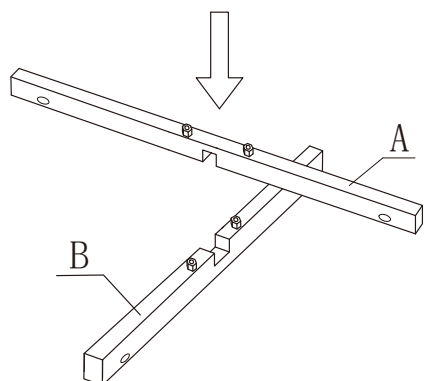


1、 Place the part(A) upper crossbar on the part B lower crossbar, Make them coincide

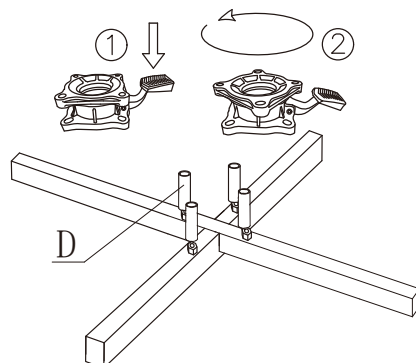


2、 Prepare to install Part D onto the crossbar. According to the diagram, press Part D down and rotate it clockwise by 45 degrees so that the screw holes align with the ones below.

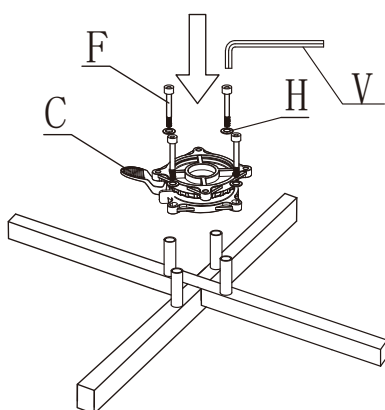

3、 Use the wrench V to screw the screw F into the screw hole, and don't forget to place the washer H underneath.

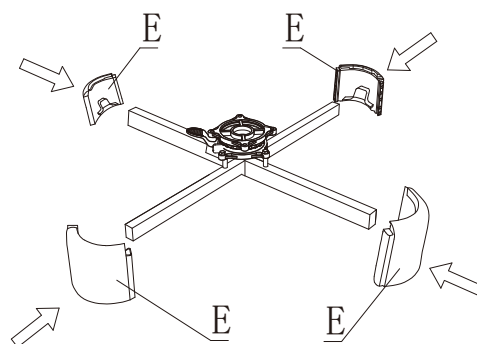


4、 Fasten part(I) to four corners

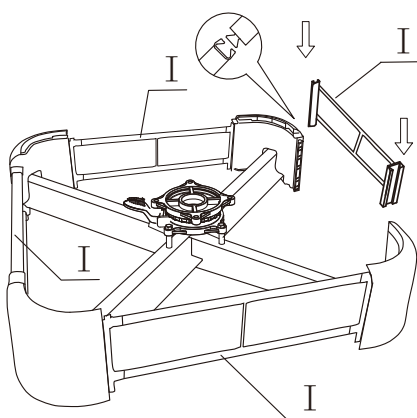


5、 Aling both sides of part “I” and press down.


PRODUCT ASSEMBLY

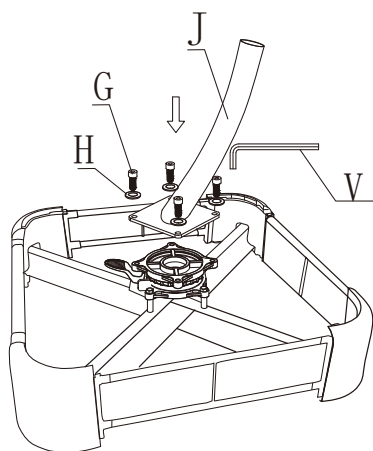


6、First,loosely fasten the four “G” screws into the holes,then tighten all four together at the end.

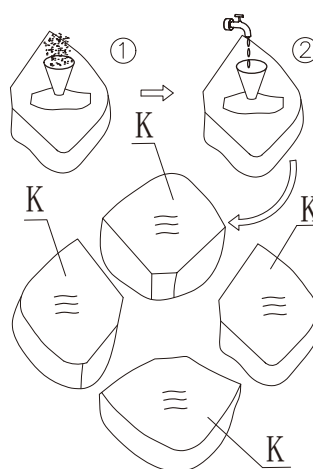


7、 Fill the four “K” unit with sand and then water in sequence.

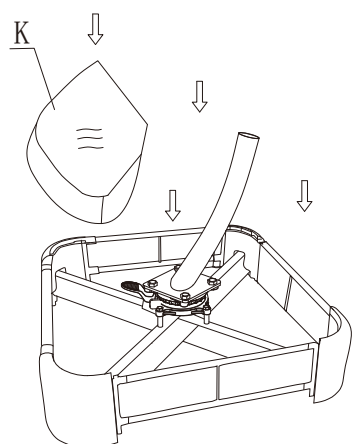


8、 Put the part(L) into the assembled base in sequence

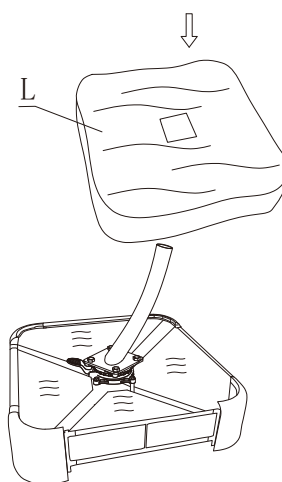

9、 Open the gap of the part(M) and insert the part(K) to cover it

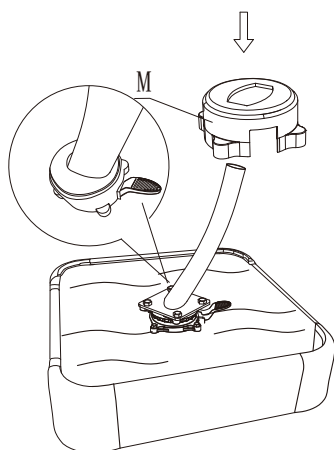


10、 Position the short edge of the "M"cover toward the curved arm, ensuring "M" covers the dial.

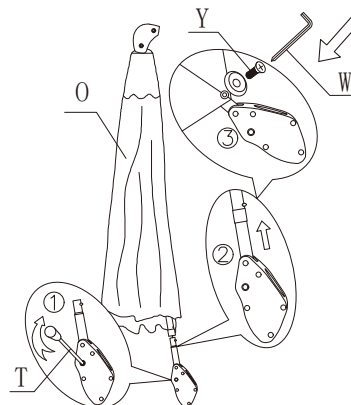


11、 Step1&2: Rotate "O" clockwise to latch the connector on to the Pole. Step3: Use screw "Y" to secure the umbrella fabric to the pole.




PRODUCT ASSEMBLY

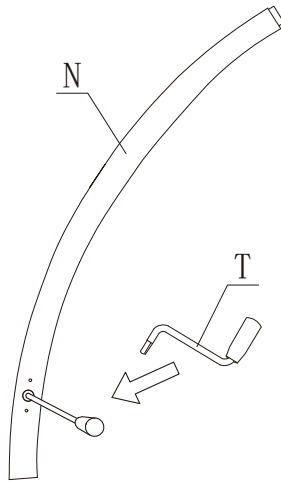


12. Take out the part(N) and insert part(T) into it

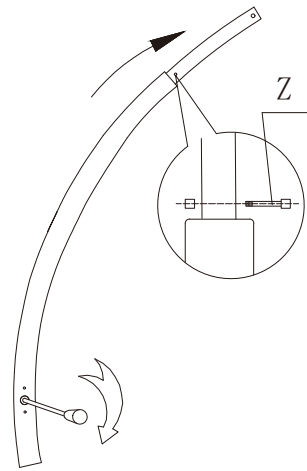


13. Rotate downward the part(T) to make the other end appear inwardly bent until the "stop" mark appears

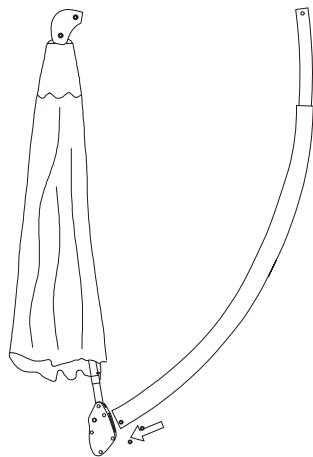


14. Insert the part(N) into the crank shell

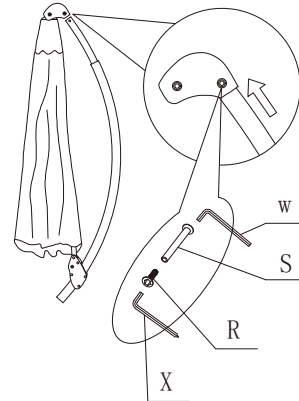

15. Insert the part(N) into the top of the part(O), insert the part(R) into the elbow hole, and use the part(X) to tighten the part(S) and the part(R) to connect the part(N) and the part(O); **The main part of the umbrella has been installed**

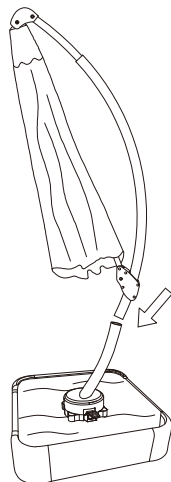

16. Insert the umbrella main body bent tube into the base foot barrel

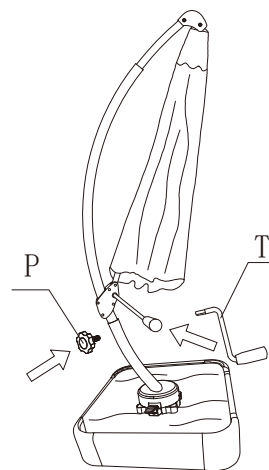

17. Use the part(T) to screw into the foot barrel to fix it; Insert the part(P) into the crank handle shell




1 PERSON ASSEMBLY




AROUND 5 MIN ASSEMBLY


PRODUCT ASSEMBLY

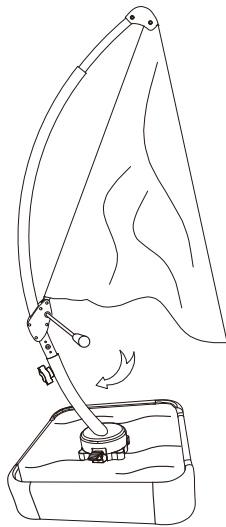


18、Rotate the crank handle downward to open the umbrella

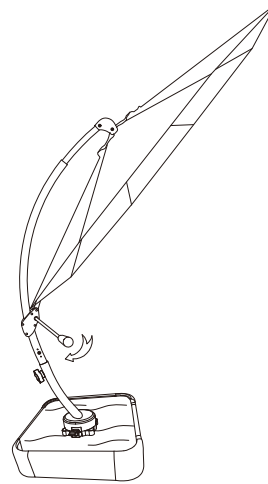

19、Rotate the crank handle downward until the umbrella is fully opened

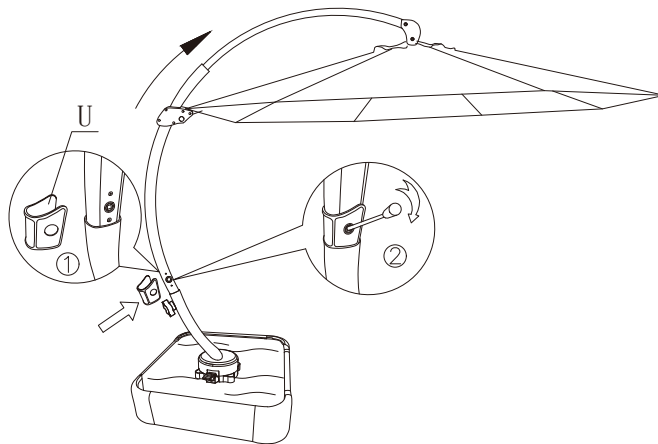

20、Insert the part(U) into the bent tube and align it with the hole, insert the part(P) into the bent tube and rotate it downward to extend the inner bent tube outward to drive the umbrella to rise

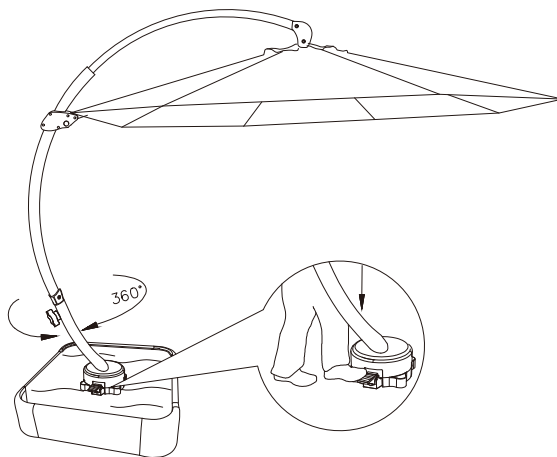

21、Rotate the umbrella 360° by stepping on the foot pedal

WARRANTY



1-YEAR Warranty Program

- 1 For a period of one (1) years after date of purchase, the Manufacturer will either repair or replace defective components in accordance with this Limited Warranty. This warranty is between the Manufacturer and the original purchaser and is valid only when accompanied by the original purchaser's sales receipt showing original date of purchase and location of purchase. Replacements under this warranty revert back to the date of original purchase for future warranty.
- 2 The manufacturer or its authorized dealer can accept or reject warranty claims based on its findings. This warranty applies in normal residential use only and is not intended for commercial use. The Manufacturer can make substitutions as required of materials, components, and sub-components of comparable value and utility. This warranty is limited to product repair or replacement (to be determined solely by the Manufacturer). Warranty return is limited to only the single affected component.
- 3 This limited warranty covers only manufacturing defects and does not cover normal wear and tear, damage due to acts of nature (such as, but not limited to freezing or high winds), abuse or misuse, including chemical damage from suntan oil or other chemicals, exposure to extreme heat or cold, abrasion or excessive weight. This product is intended to be used in standard installations only. This warranty is void if the product is not used for its intended purpose. The Manufacturer disclaims liability for any aspect of installation and any inconvenience caused by a defective part of a component.

HELP CENTER

Question about your product?

We are here to help, contact us by

