








Maximum capacity : 40 kgs/88 Lbs

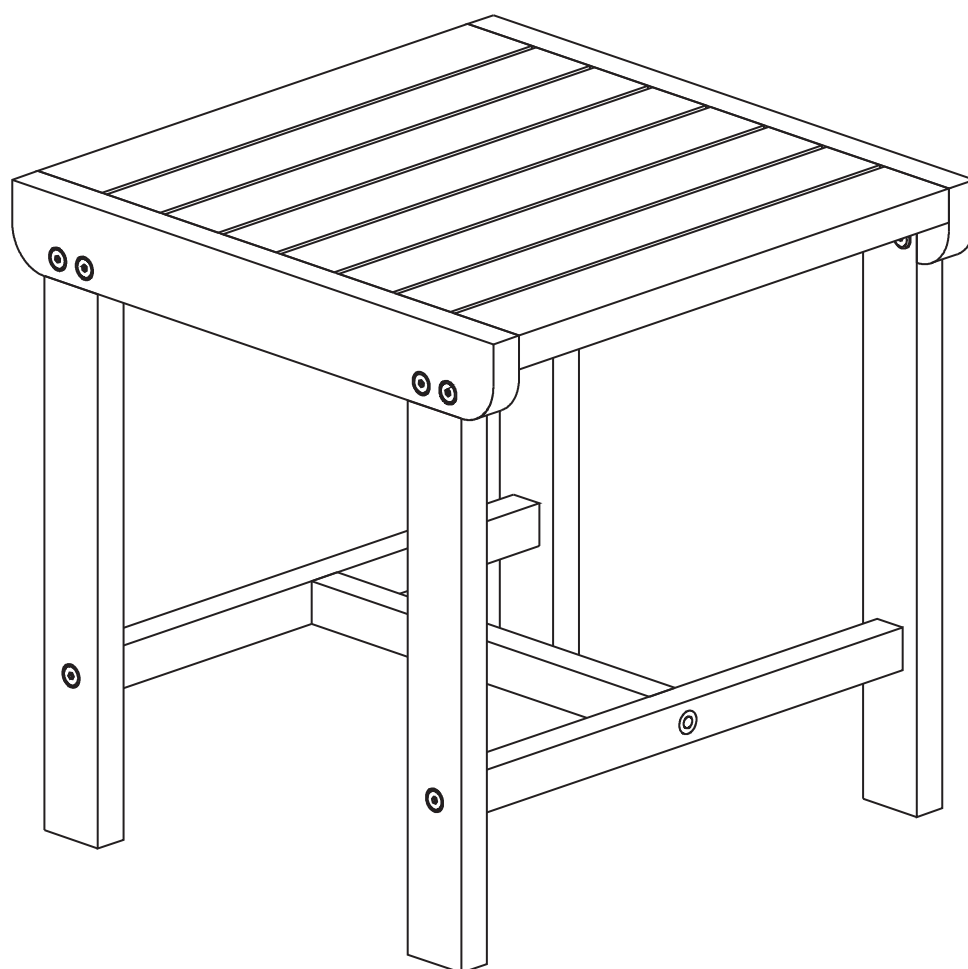

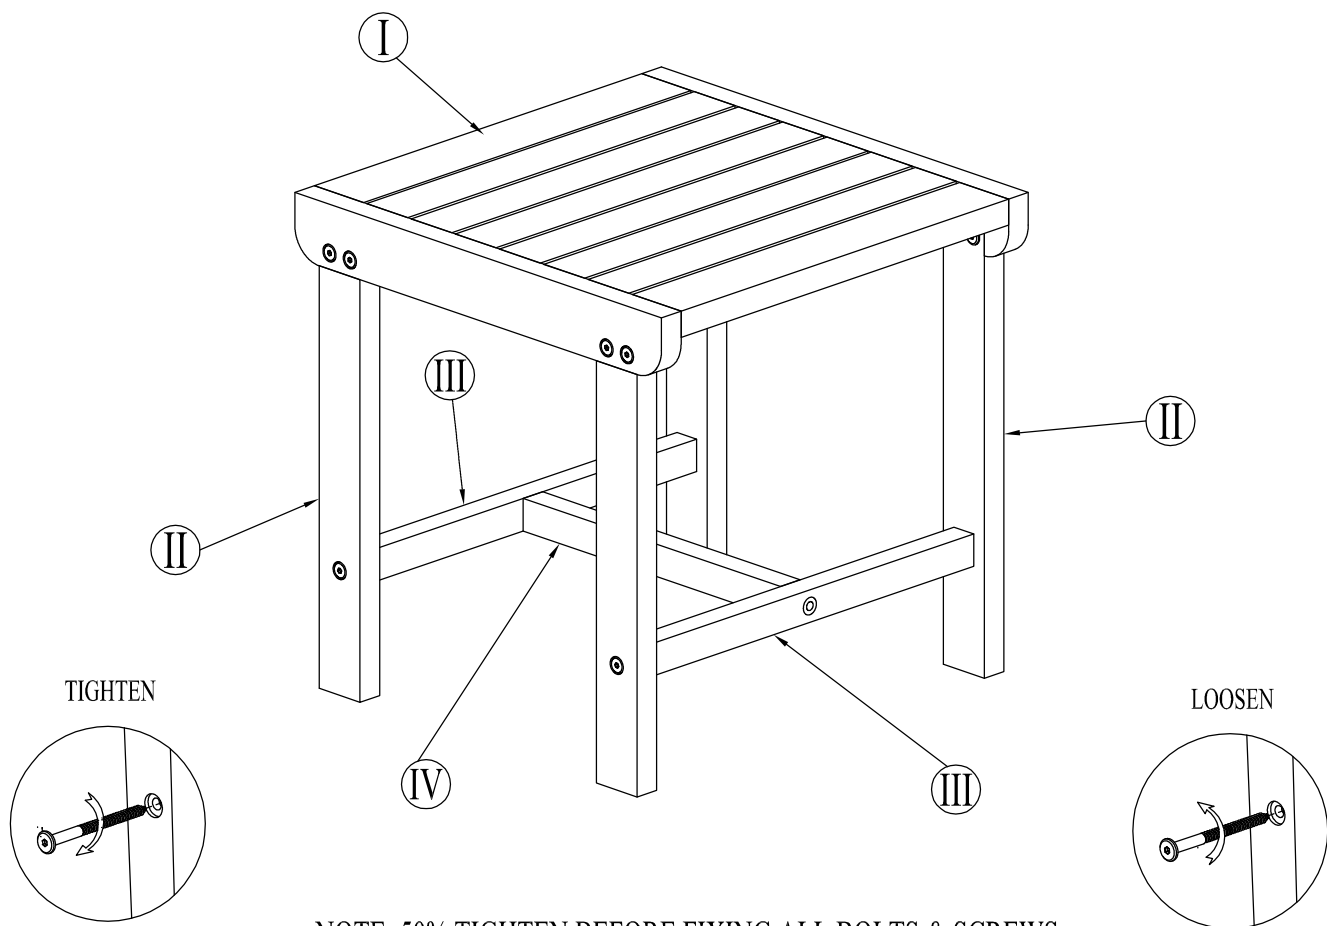

NOTE: 50% TIGHTEN BEFORE FIXING ALL BOLTS & SCREWS


COMPONENTS LIST

I  Q'TY 1	II  Q'TY 4	III  Q'TY 2	IV  Q'TY 1
---	---	---	---

HARDWARE LIST

A		6	F - Screw 7x50	C		8	Sleave nut
B		8	Bolt 6x15	D		2	Allen Key

Step 1

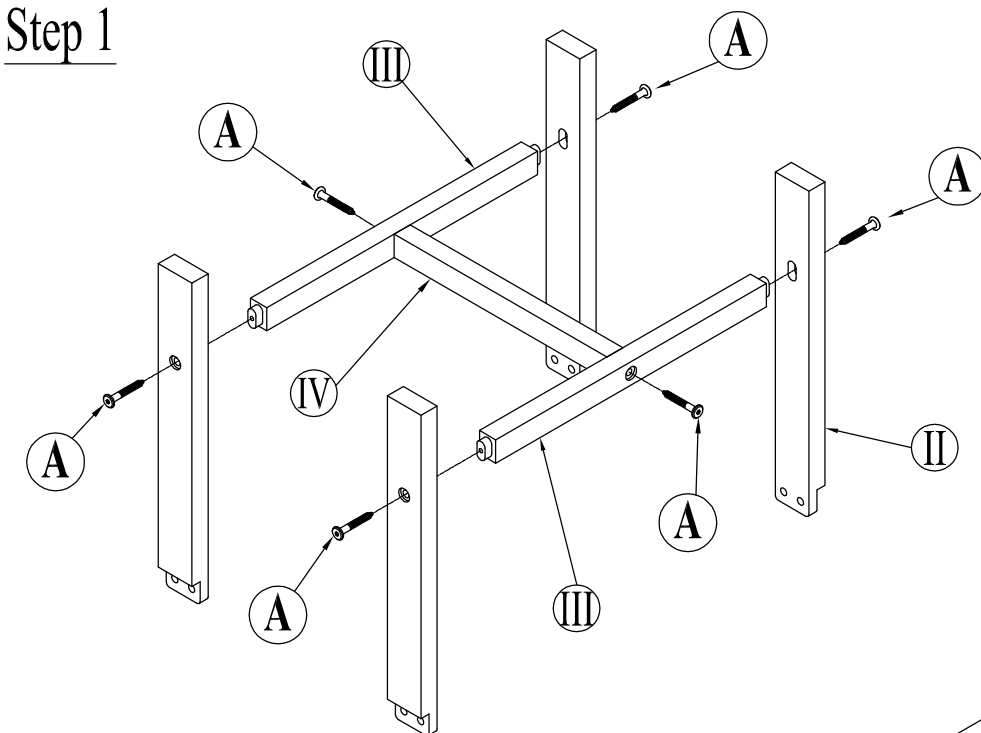

Step 2

