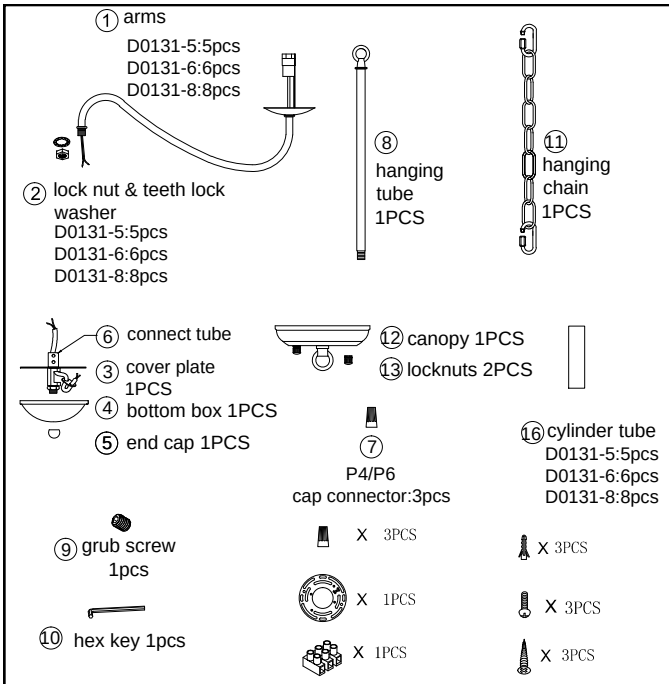

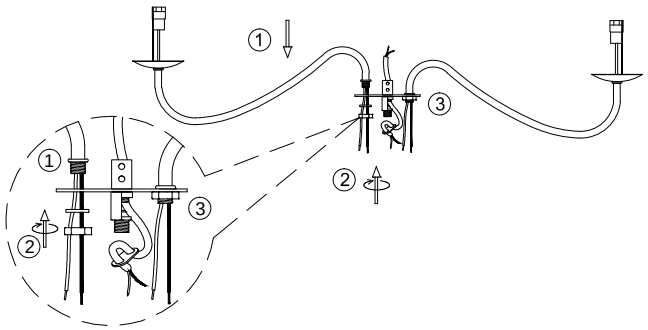

1.Install the arms ① on the plate ③ with lock nut & teeth lock washer ②.

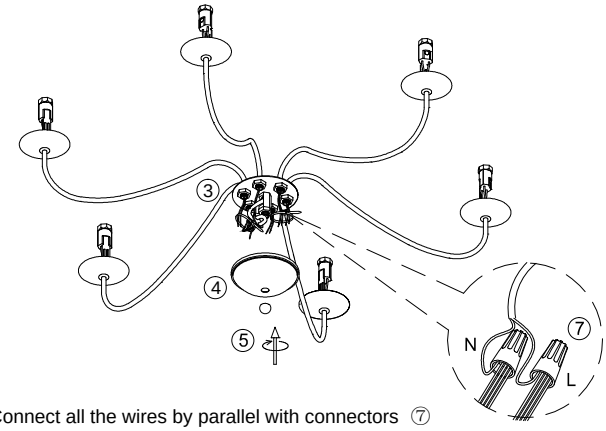

2.Connect all the wires by parallel with connectors ⑦
(all live line-L use one connector, and neutral Line-N use another connector).
3.Install the box ④ to the plate ③ with end cap ⑤.

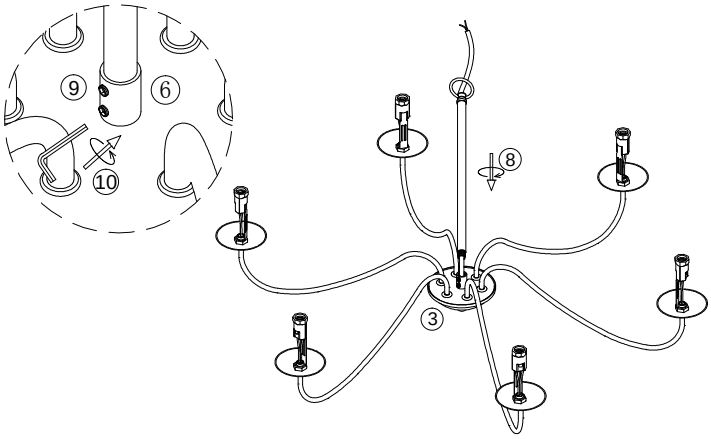

4.Let the wire go through the hanging tube ⑧, rotate to fasten the tube ⑧ to the connect tube ⑥, lock the tube ⑧ with grub screw ⑨ by rotate hex key ⑩.

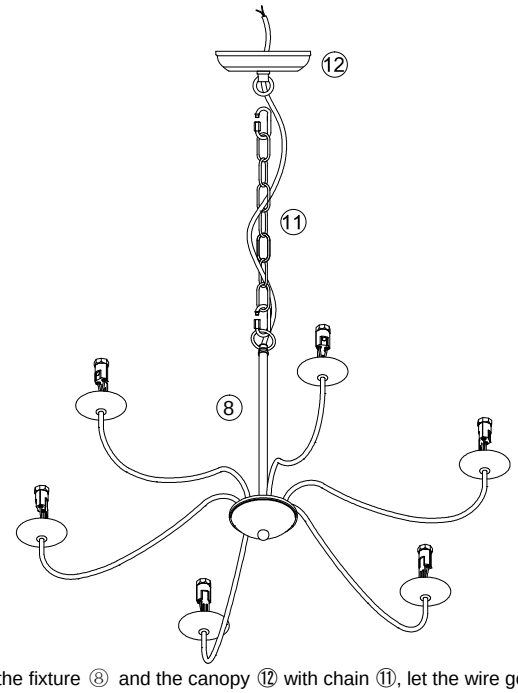

5.Connect the fixture ⑧ and the canopy ⑫ with chain ⑪, let the wire go through the chain ⑪.

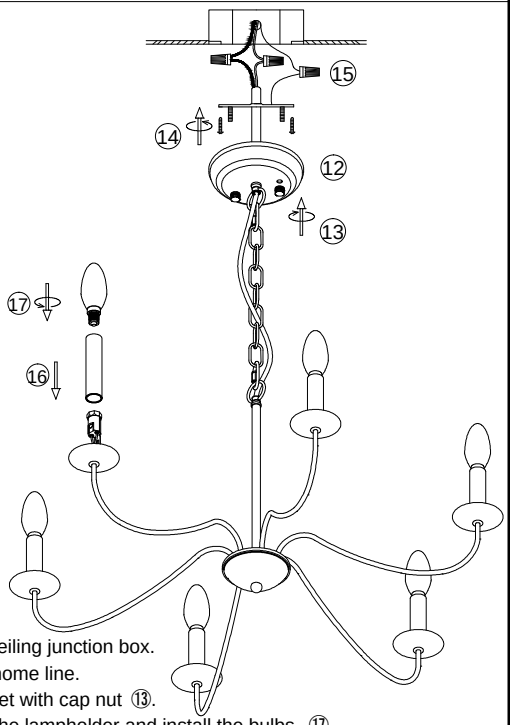

6.Install the bracket ⑭ to the ceiling junction box.
7.Connect the wire ⑮ to your home line.
8.Install the fixture to the bracket with cap nut ⑬.
9.Put the cylinder tubes 16 on the lampholder and install the bulbs ⑰.

D0131/5/6/8

Please read carefully before installation!!!
Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !