

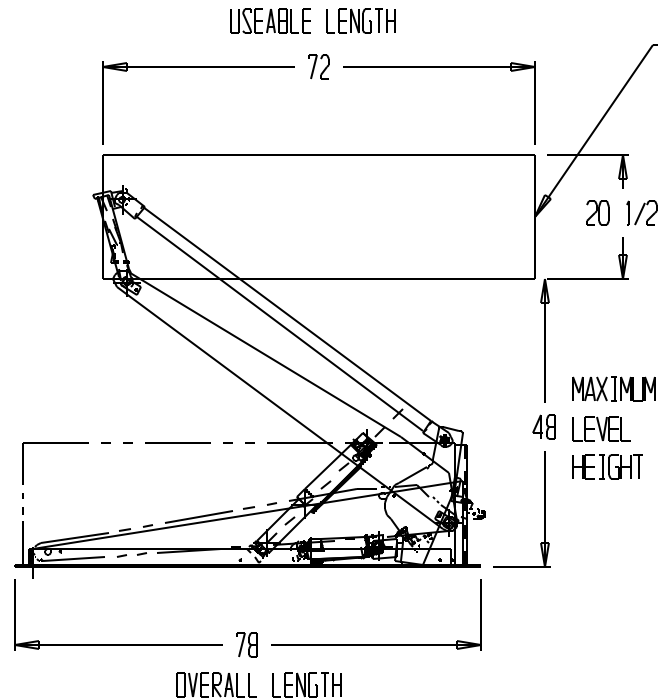


GROUND LIFT AND TILT TABLE, ZLTT-4472-4-48

OPERATORS

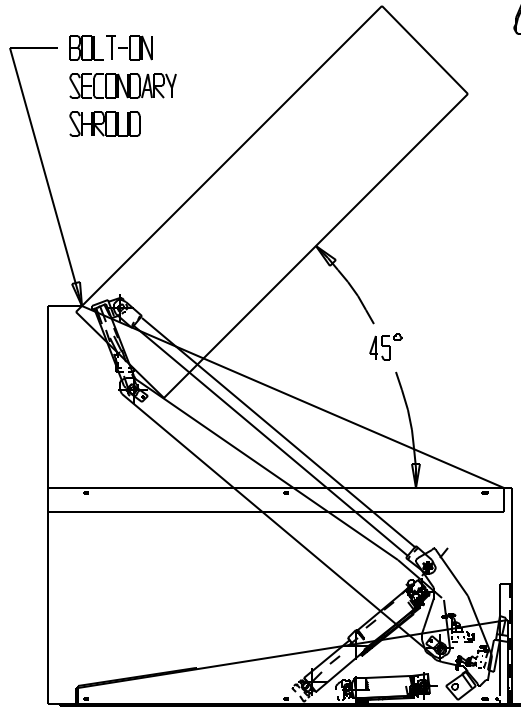

LOADING/UNLOADING (ENTRY SIDE)
WITH SAFETY TOE GUARD

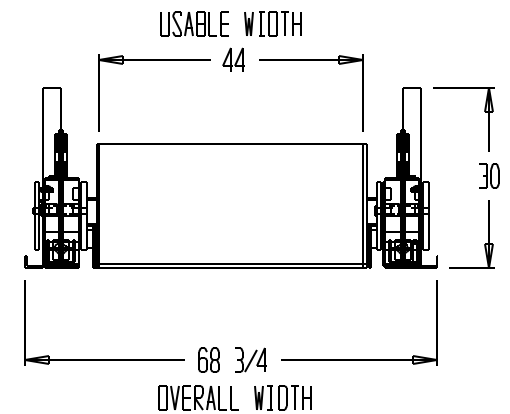

STANDARD FEATURES

MODEL NUMBER IS ZLTT-4472-4-48
USABLE WIDTH IS 44 INCHES
USABLE LENGTH IS 72 INCHES
CAPACITY IS 4,000 POUNDS (EVENLY DISTRIBUTED LOAD)
LOWERED HEIGHT IS 1/2 INCH WITH BEVELED ENTRY
MAXIMUM LEVEL HEIGHT IS 48 INCHES
MAXIMUM TILT ANGLE IS 45 DEGREES
OVERALL WIDTH IS 68 3/4 INCHES (USABLE PLUS 24 3/4 INCHES)
OVERALL LENGTH IS 78 INCHES (USABLE PLUS 6 INCHES)
24V CONTROL IS STANDARD HAND HELD ON 8 FOOT CORD
SAFETY TOE GUARDS ON FRONT (LOADING SIDE) OF DECK
PAINTED BLUE

PLEASE CIRCLE SPECIFICATIONS:

POWER	AC	DC (12V)	AIR/OIL
MOTOR VOLTAGE	115	208	230 460
DEDICATED CIRCUIT REQUIRED			
MOTOR PHASE	SINGLE	THREE	
CONTROL	HAND	*FOOT	
* BATTERY CHRG.	REMOTE	ON-BOARD	
*CHRG. INDICATOR	YES	NO	

PRODUCTION WILL START UPON
RECEIPT OF SIGNED APPROVAL
DRAWING

**SPECIAL UNITS ARE NON-RETURNABLE
*AVAILABLE AT ADDITIONAL COSTS

APPROVAL

I, the undersigned, hereby approve this print
[] As drawn [] As marked
This includes my approval of design & dimensions.
Signed: _____
Date: _____

DISTRIBUTOR'S NAME: T & S EQUIPMENT		P.O.#: _
DRAWN BY: E. JOHNSON		DATE: 12/29/03
REFERENCE: -		SALES: _
scale: 1:32		DRWG./FILE NAME: 04-007-033-001