

## Ordering Information

Model No.	Item name	Dim	Lumens <sup>2</sup> (lm)	Watts (w)	CCT <sup>1</sup> (k)	Efficacy (lm/w)	CRI	Lifetime <sup>3</sup> (h)	Beam Angle	Base type	Voltage (v)	Cerification	Equivalent <sup>4</sup> (w)
FDK-P30-F1-11-40D-30K-D	PAR30	YES	850	11	3000K	77	80	25000	30/40	E26	120	UL/ES	75
FDK-P30-F1-11-40D-40K-D	PAR30	YES	850	11	4000K	77	80	25000	30/40	E26	120	UL/ES	75

1. CCT Range complies to ANSI C78.377-2008.

2. Thermally stable typical lumens ( $\pm 10\%$ )


3. Rated life is based on 70% lumen maintenance, and engineering testing and probability analysis.

4. Equivalency based on the Energy Star® Integral LED Lamp Center Beam Intensity Benchmark Tool.

5. Energy Star® will be available in May. 2013.

Note: All Information consistent with IESNA LM-80-08 results and IESNA LM-79-08 testing completed by a qualified third party firm.

Note: All lamps meet Energy Star® Integral LED Lamp requirements, and will be submitted for testing.

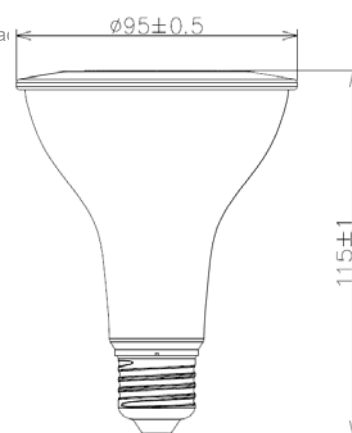

## Dimensions

Model	MOL	Diameter
<b>FDK-P30-F1-11-40D-XXK-D</b>	<b>4.57"</b>	<b>3.74"</b>

Note: Lamp shape conforms to ANSI C78.21-2003.

Note: Designed to comply with RoHS Directive 2002/95/EC.

## Energy Savings

Model No.	Equivalent	Energy Savings
FDK-P30-F1-11-40D-40K-D	75W Incandescent	<b>\$176</b>



\*Actual Equivalent Replacement, based on the Energy Star® Integral LED Lamp Center Beam Intensity Benchmark Tool.

Note: Energy Savings based on using one bulb for 25,000 hr rated life at 11¢/kWh. Does not include maintenance and replacement lamp savings.