

PECUE SERIES

LED Combination Exit/Light

Specifications:

Description:

The PECUE Series offers quality and value with a compact and attractive LED based combination emergency exit. The white housing and lamp-heads are made of high impact UL flame rated thermoplastic. Snap together canopy, housing, removable chevrons for quick and easy installation. Universal single or double-face. Remote capacity unit will run 4 PERHC Series single remote lamp-heads or 2 double PERHC remotes.

Features:

- LED life-cycle of more than 10 years
- Molded-in template for Quick installation
- Dual-voltage 120 or 277V AC input
- Includes long-life Nickel Cadmium battery for UL recognized 90 minute emergency lighting
- Remote capacity option
- Damp Location Listed
- Provided with test switch and AC-On indicator
- Canopy included

Application:


The PECUE Series can be applied in stair-wells, hallways, offices and other commercial applications

Energy Consumption:

	120 VAC	277 VAC
UR-30	4.12W	3.20W
UG-30	3.22W	3.18W
UR-30-RC	3.56W	4.06W
UG-30-RC	3.20W	3.80W

Accessories:


- PERHC – SG – ID – 30
- PERHC – DB – ID – 30
- PERHC – SG – OD – 30
- PERHC – DB – OD – 30



Images:



Dimensions:

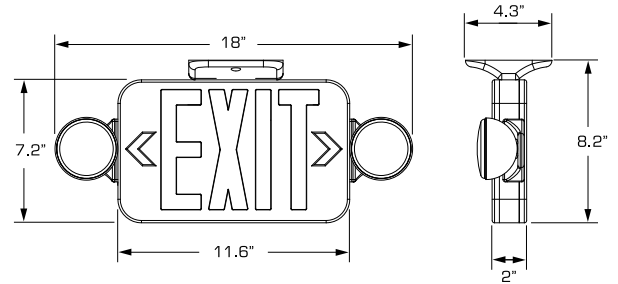

Warranty:

2 year full unit warranty

Compliances:

- UL924 Listed for Damp Location
- NFPA 101 and NFPA 70
- OSHA

Catalog number:

Base	Material	Face	Color	Finish	Remote Capacity
PECUE	Thermoplastic	U - Universal	R - Red G - Green	30 - White	RC - Remote Capacity