








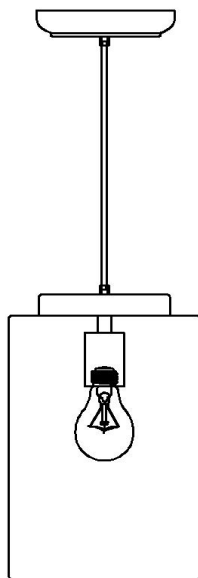


Assembly Instructions

56004245

Parts and Tools

A	Side screw		X 2	<p>Before beginning</p> <p>1) Check and open the numbered packaged bags.</p> <p>2) Read this Assembly Instructions from beginning to end before starting to assemble.</p> <p>3) Take an inventory of the required parts to ensure all are available.</p> <p>4) Assemble the separated parts according to the illustration with the providing tools, chandelier comes pre-assembled, only hanging and wiring assembly needed.</p> <p>5) To prevent accidental choking hazards, keep all packing materials away from small children.</p> <p>6) Only tighten hardware until ALL hardware are fully engaged on their locations. Overtighten bolts will damage the bolt threads.</p> <p>7) Use only factory provided hardware to assemble. Unapproved hardware can damage product or jeopardize the structural integrity of the product.</p> <p>8) The use of power tool to assemble is not recommended due to high risk of over-torque, which can damage the product.</p> <p>WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LINCENSED ELECTRICIAN.</p> <p>WARNING***SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER</p>
B	Mounting bracket		X 1	
C	Wire Connector		X 3	
D	Canopy		X 1	
E	Side screw		X 1	
Z1	Nut for A (Spare Parts)		X 1	
Z2	Nut for A (Spare Parts)		X 2	
Z3	Non Slip Washer for A (Spare Parts)		X 1	
Z4	Non Slip Washer for A (Spare Parts)		X 2	



ASSEMBLY REQUIRES
TWO PEOPLE



20 MINUTE
ASSEMBLY TIME




KEEP INSTRUCTIONS
FOR FUTURE USE

Assembly Instructions


56004245

1

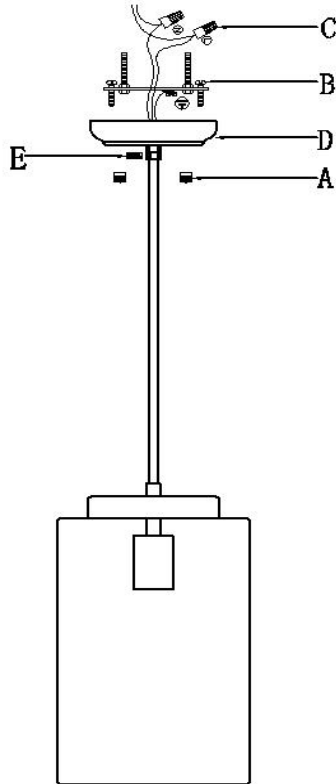


- 1) Remove the mounting bracket (B) from the canopy (D) by loosening the side screws (A)
- 2) Adjust the height of the cable and the safety steel wire (E) as needed.
- 3) ENSURE THE ELECTRICITY SUPPLY IS TURNED OFF BEFORE PROCEEDING.
- 4) Affix the mounting bracket (B) on the outlet box .
- 5) Wrap both safety cables with wire connectors (C), push the cable into the outlet box.
- 6) Attach the canopy (D) to the mounting bracket (B) and secure with screws (A).

2



E26 Max 40W

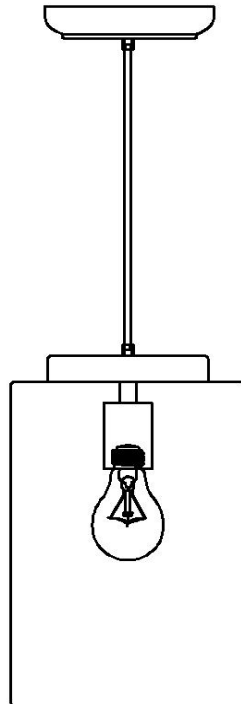

- 1) Install the bulb (Not included), gently hold the bulb firmly and turn clockwise until secured.
 - 2) Once the installation is complete, remember to turn on the power at the fuse or circuit breaker.
- ***Clean with a dry, soft cloth only, use no harsh abrasives or chemical agents***