


LDC484 LDC485 LDC486 LDC487 LDC488

USER MANUAL LED RECESSED SPOTLIGHT



01. MAKE HOLE PATTERN
02. SWITCH OFF MAIN
03. CONNECT POWER-SUPPLY TO THE MAIN
04. CONNECT LAMP TO POWER SUPPLY
05. HOLD SPRINGS
06. PUT LAMP INTO CEILING
07. SWITCH ON THE MAIN AND LIGHT ON

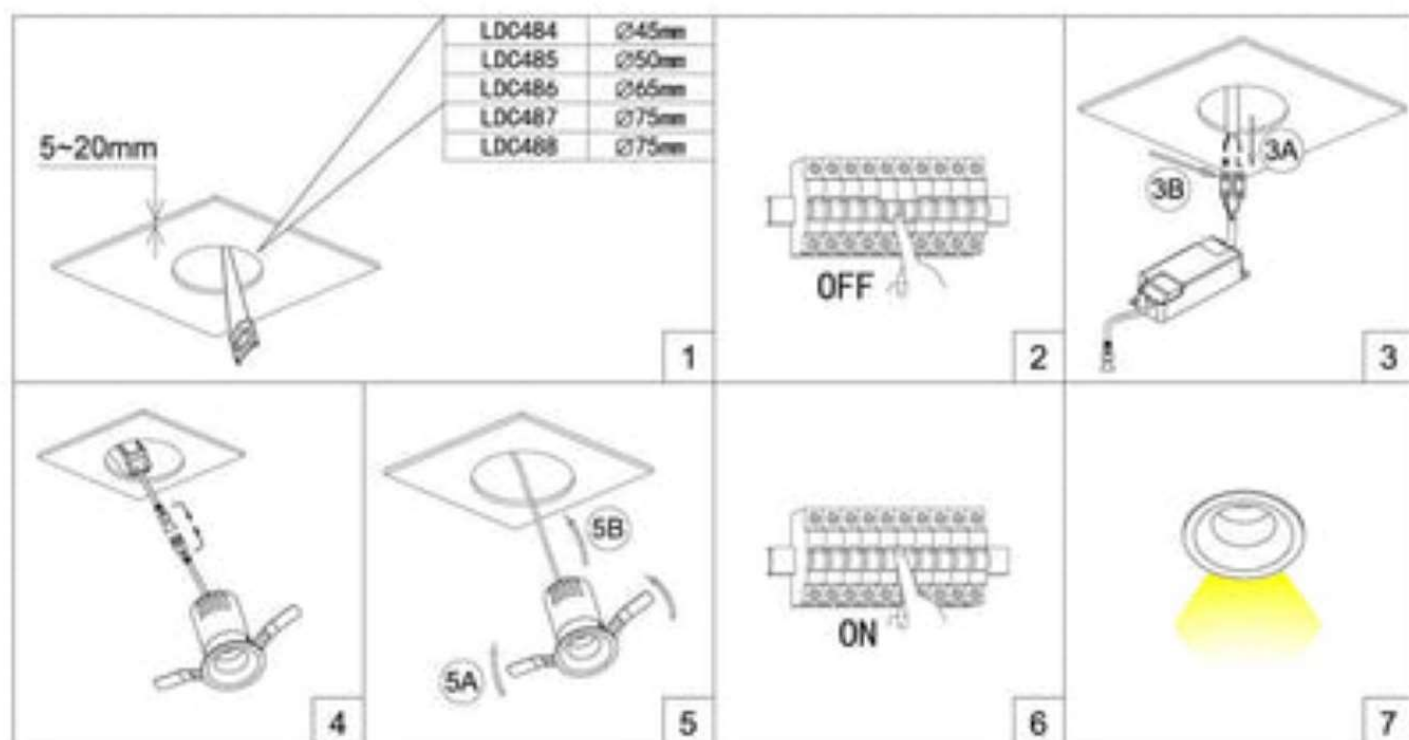

Lamp: CREE COB LED
 Color: 2700K/3000K/4000K/5000K
 Color rendering: Ra90
 Input: 220V-240V AC
 Current: Constant 500mA/180mA/250mA/
 300mA/400mA
 Frequency: 50/60Hz
 Watt: 5W/7W/9W/12W/16W
 Life span: 20,000hrs
 Operating temp: -20°C ~ +40°C
 Indoor use only
 IP20
 Dimmable: NO

Cautions: a. Installed by qualified electrician
 b. Use only power-supply supplied
 by manufacturer for products guarantee