
GLIDER TEXTILENE LOVESEAT BENCH ASSEMBLY MANUAL



Assembly Instructions


- Prior to assembly, ensure that you lay out and identify all the parts listed in the parts list.
- Tighten all nuts and bolts securely. Hand-tighten all bolts before use. Avoid using power tools or applying excessive force during assembly and bolt tightening.
- If you encounter any difficulties during assembly or if any part is missing or damaged, please don't hesitate to contact our customer service team via email at

Care and warranty

- The weight capacity of this chair is 250 lbs.
- Clean the frame components and fabric with a mild soap solution, then rinse thoroughly. Avoid using bleach, acid, or any other solvents on either the fabric or frame components.

• For the best performance and safety of your chair, inspect and tighten all bolts and fasteners regularly


Part list

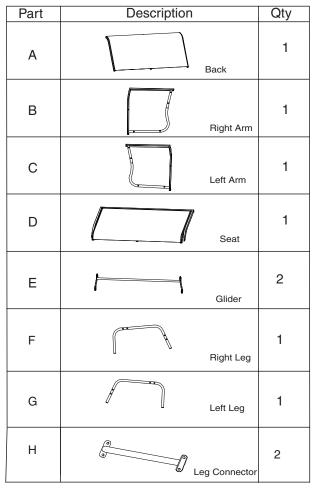


Part	Description	Qty
I	M6*40 Bolt	2
J	M6*30 Bolt	6
к	M6*15 Bolt	8
L	M6*18 Bolt	8
М	Plastic washer	8
N	Washer	8
0	Allen Key	1

LOVESEAT

1.Connect the right arm (Part B) to the back (Part A) using Bolt (J) as shown in the diagram.

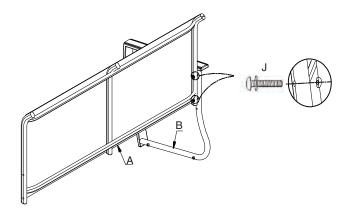


2. Connect the left arm (Part C) to the back (Part A) using Bolt (J) as indicated in the diagram.




LOVESEAT

3. Attach the seat (Part D) to the armrests (Part B and Part C) using Screw (J) and Screw (I) as depicted in the diagram.




4. Connect the gliders (Part E) to the armrests (Part B and Part C) using Screw (L), washer (N), and Plastic washer (M) as indicated in the diagram.




LOVESEAT


5. Connect the right leg (Part F) to the glider (Part E) using Screw (L), washer (N), and Plastic washer (M) as illustrated in the diagram.



6. Connect the left leg (Part G) to the glider (Part E) using Screw (L), washer (N), and Plastic washer (M) as shown in the diagram.

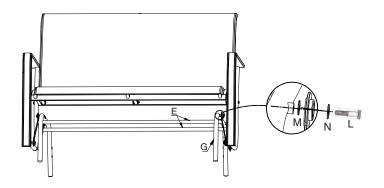

7. Attach the leg connector (Part H) to the legs (Part F and Part G) using Screw (K) as indicated in the diagram.



8. Lastly, ensure that all screws are securely tightened before using the product on level ground.

