




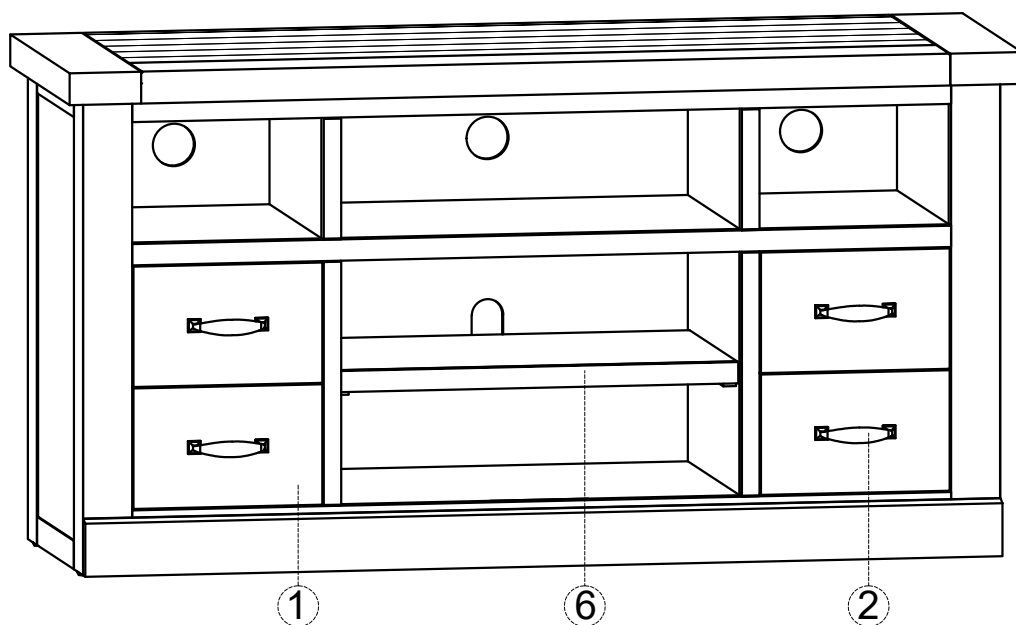



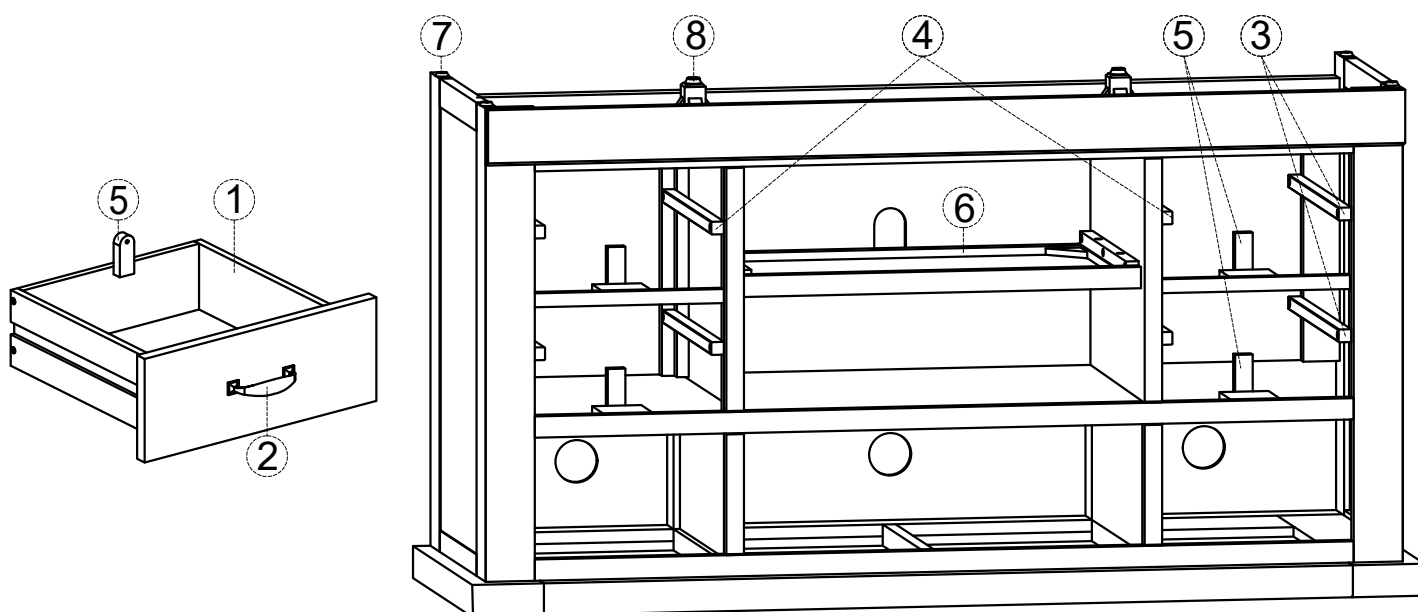


# ASSEMBLY INSTRUCTIONS & PARTS IDENTIFICATION TELLURIDE 60" TV CONSOLE

Thank you for purchasing this quality product. Be sure to check all packing material carefully for small parts that may have come loose inside the carton during shipment.



# ASSEMBLY INSTRUCTIONS & PARTS IDENTIFICATION TELLURIDE PIER & BRIDGE

Thank you for purchasing this quality product. Be sure to check all packing material carefully for small parts that may have come loose inside the carton during shipment.

Hardware kit			
No	Description		Qty
A		Flat washer Ø8	36 pcs
B		Lock washer Ø8	36 pcs
C		Bolt To Connect Top-Bottom w 2 Main Panel Ø6.3 x 50	16 pcs
D		Bolt To Connect Middle Frame & Bridge Ø6.3 x 30	12 pcs
E		Bolt To Connect Metal Bracket Ø6.3 x 15	8 pcs
F		Allen Key K4	1 pc
I		Metal Bracket	4 pcs

## THIS ASSEMBLY WILL REQUIRE TWO PEOPLE

### STEP 1

- Carefully layout all parts on a smooth flat surface to prevent scratches. Separate and arrange all hardware.
- Lay the back panel assembly flat. Attach the Storage Box Bottom (5) to the bottom of the back assembly by inserting a Long Bolt (C), a Lock Washer (B) and a Flat Washer (A) into each of the two corners. (Diagram 1)

Hand tighten with the Allen Key.


### STEP 2

- Attach the Storage Box Top (4) to the back panel with a Medium Bolt (D), a Lock Washer (B) and a Flat Washer (A) into the two holes and hand tighten with the Allen Key. (Diagram 2)

### STEP 3

- Attach the two shelves (6) by firmly inserting the dowels on the shelf into the slots on the back panel uprights.
- Attach the Pier Top (3) to the Back Panel by inserting a Long Bolt (C), a Lock Washer (B) and a Flat Washer (A) into each of the two corners. (Diagram 3)

Hand tighten with the Allen Key.

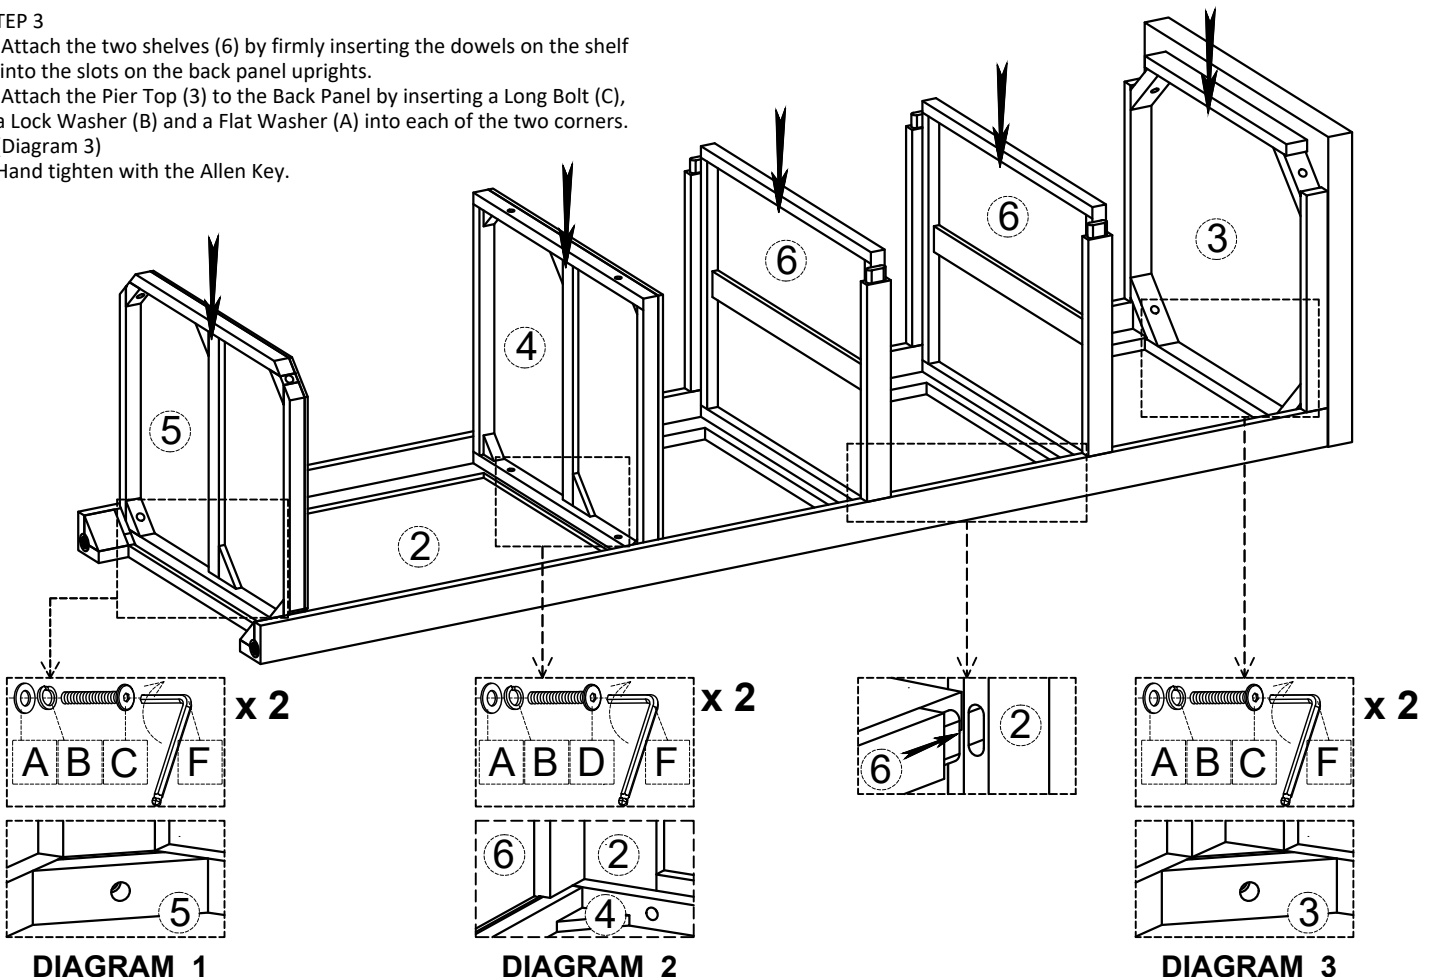


# ASSEMBLY INSTRUCTIONS & PARTS IDENTIFICATION TELLURIDE PIER & BRIDGE

## STEP 4

- Position the two Side Panels (7) into place. Carefully place the Front Panel (Left side or Right side) with the Door on top of the unit, taking care to align all the parts. Once in place, first secure the Front panel to the Pier Top by inserting a Long Bolt (C), a Lock Washer (B) and a Flat Washer (A) into each of the two corners. (Diagram 4) Hand tighten with the Allen Key.

- Next secure the Storage Box Top to the Front Panel with a Medium Bolt (D), a Lock Washer (B) and a Flat Washer (A) into the two holes and hand tighten with the Allen Key. (Diagram 2) Finally secure the Storage Box Bottom (5) to the Front Panel by inserting a Long Bolt (C), a Lock Washer (B) and a Flat Washer (A) into each of the two corners. (Diagram 1) Hand tighten with the Allen Key.

CHECK ALL BOLTS TO MAKE SURE THEY ARE TIGHTENED BEFORE STANDING THE PIER UPRIGHT.  
REPEAT THESE INSTRUCTIONS FOR THE SECOND PIER.

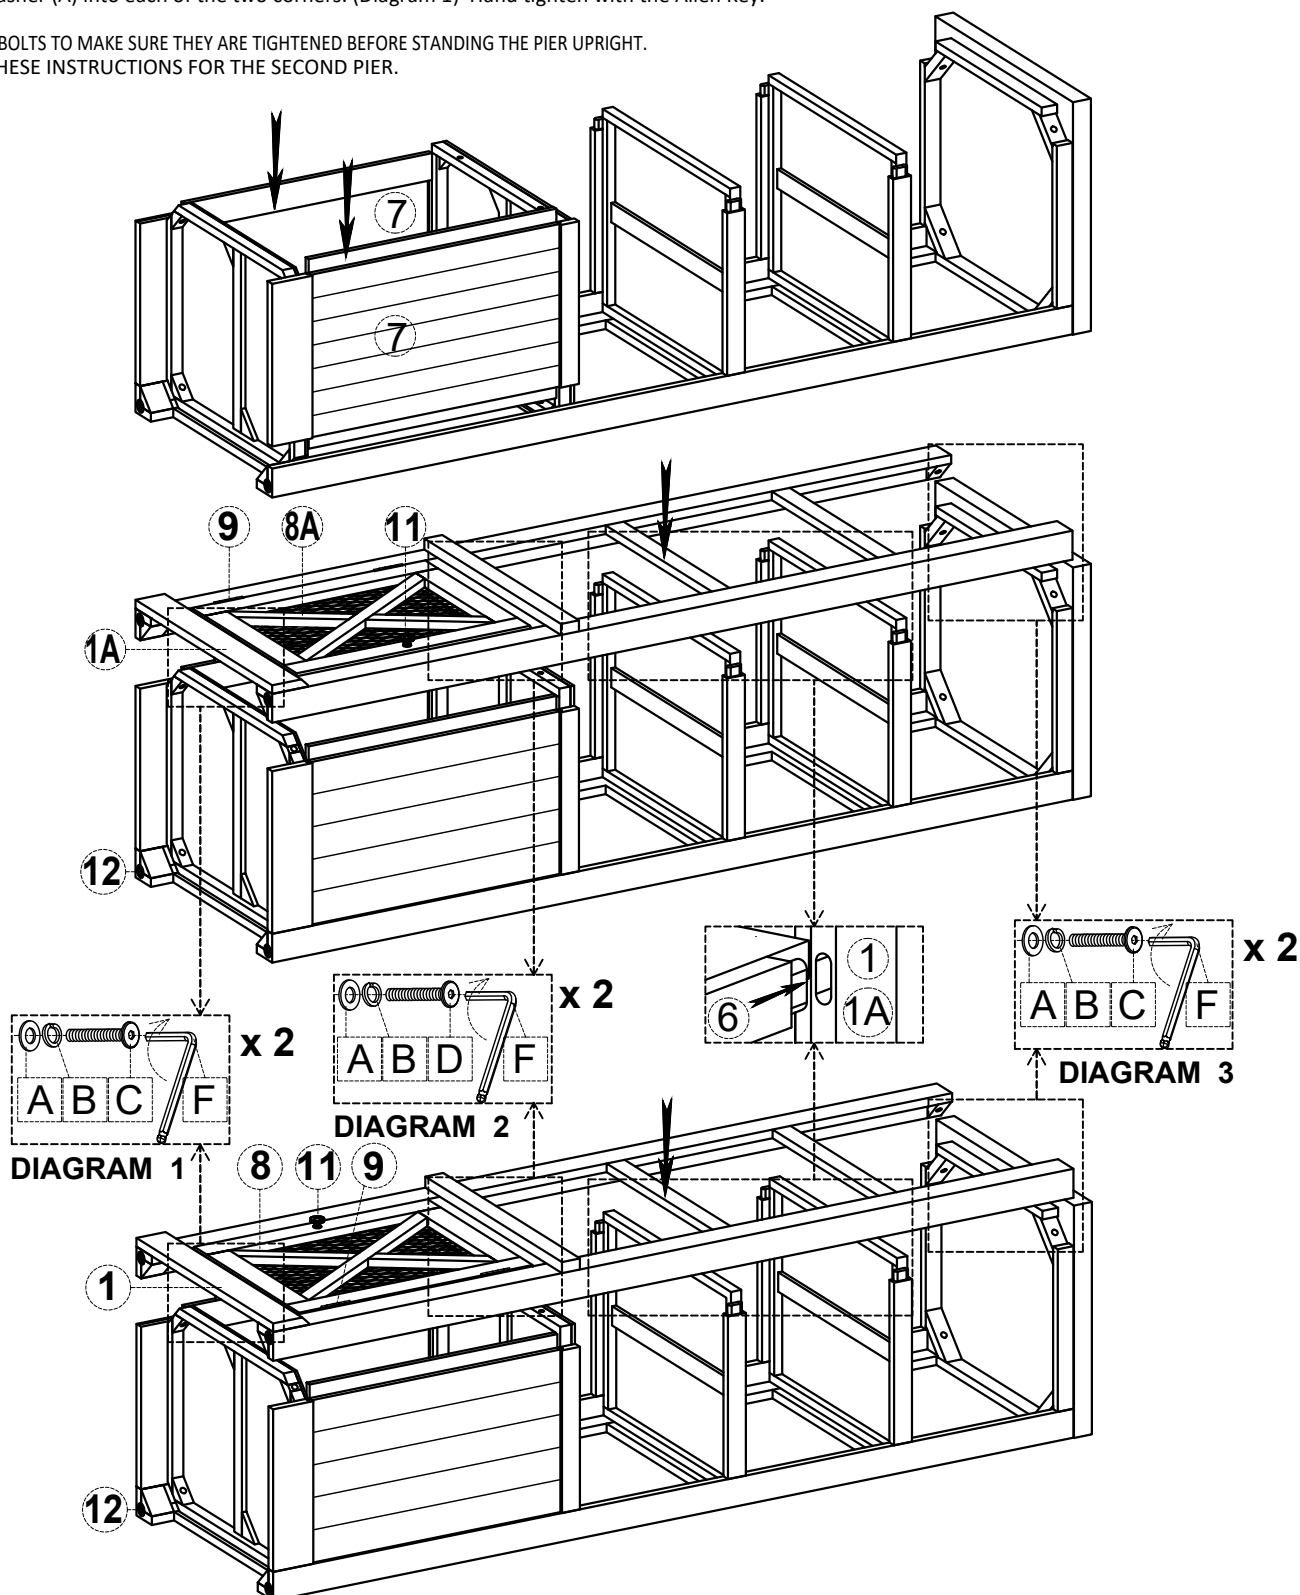


# ASSEMBLY INSTRUCTIONS & PARTS IDENTIFICATION TELLURIDE PIER & BRIDGE

## ATTACHING THE BRIDGE TO THE PIERS

- Depending on the size of the Console being used, place the piers either 60" or 70" apart. Attach the Bridge to each pier using a Medium Bolt (D), a Lock Washer (B) and a Flat Washer (A) into the two holes and hand tighten with the Allen Key.

## ATTACHING THE CONSOLE TO THE PIERS

- Attach the Metal Brackets to the back of the Piers using the Small Bolt (E), a Lock Washer (B) and a Flat Washer (A). Hand tighten with the Allen Key.
- Slide the console into place and secure the console to the piers using the Small Bolt (E), a Lock Washer (B) and a Flat Washer (A). Hand tighten with the Allen Key.
- Carefully slide the complete four piece unit into place AND ATTACH BOTH SETS OF THE ANTI - TIP HARDWARE PER INSTRUCTIONS.
- Levelers on the bottom of the piers can be adjusted if needed.

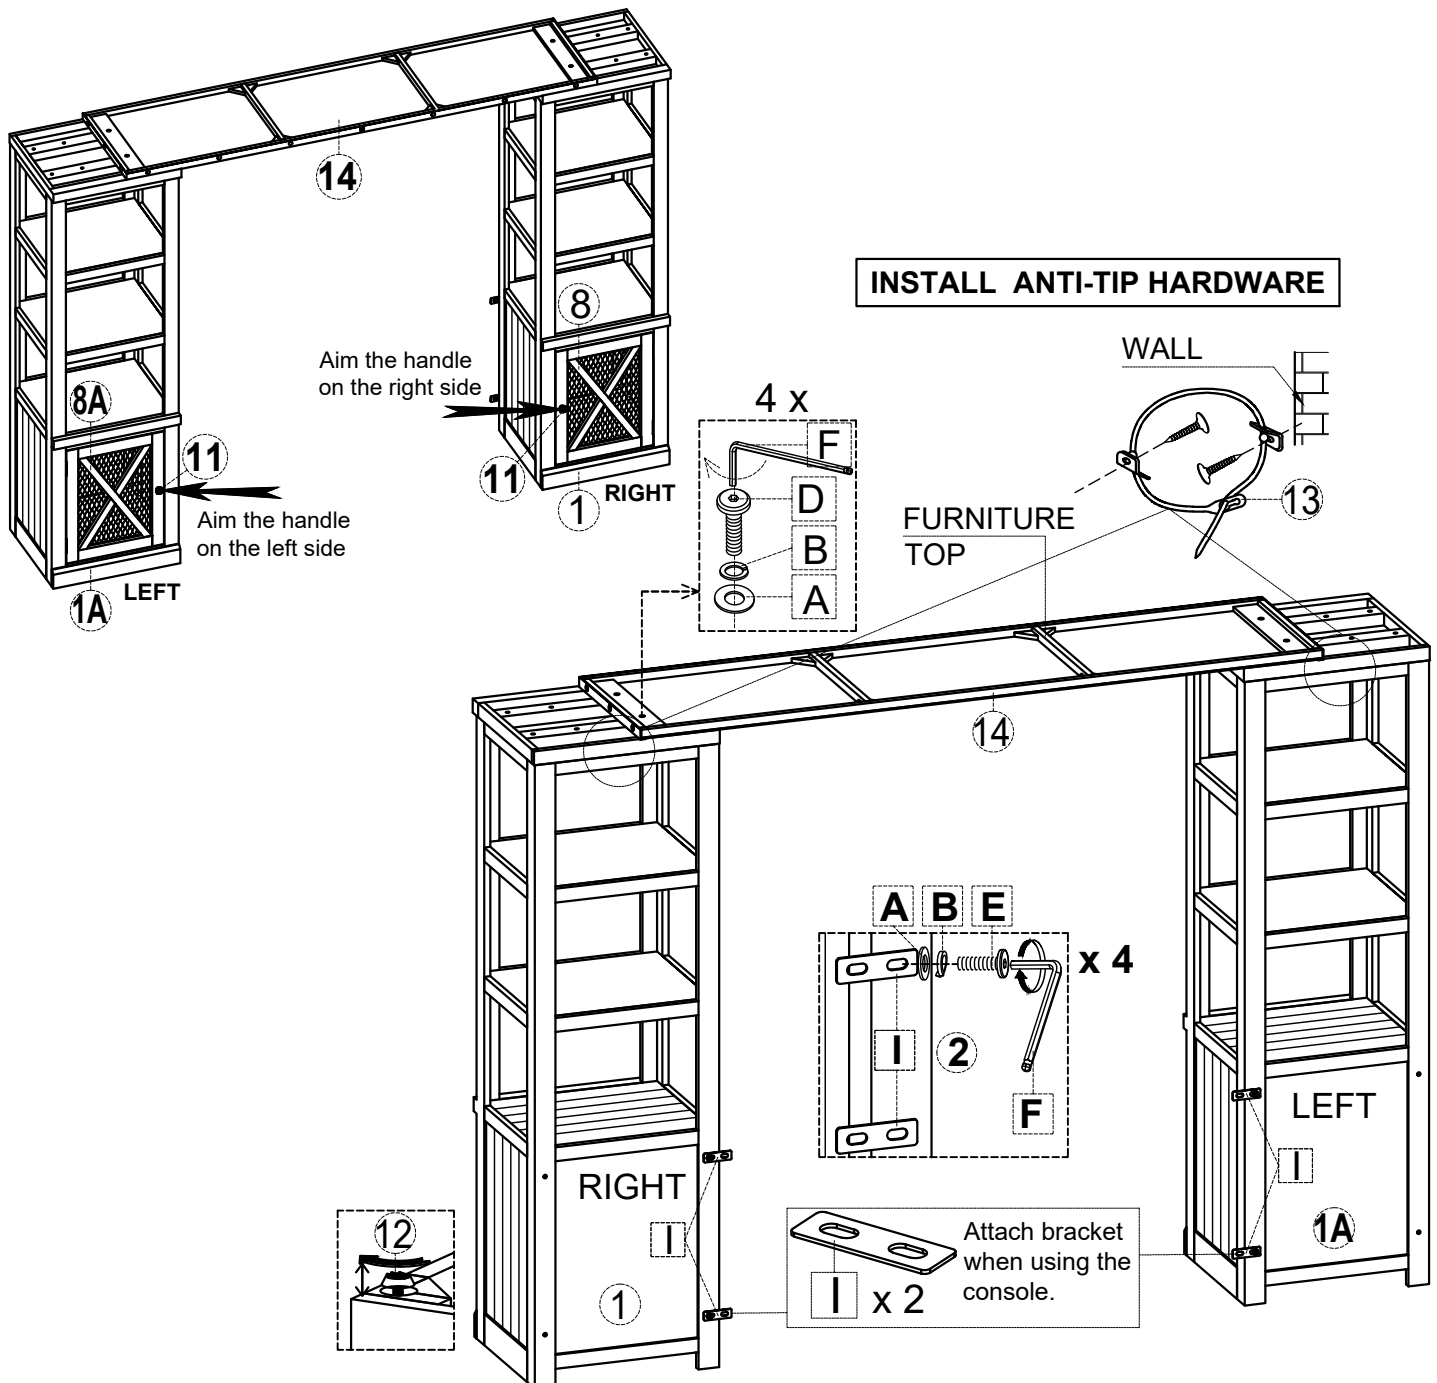

## PLEASE NOTE :

This assembly will require two people. To help prevent the possibility of tip-over, install the ANTI-TIP hardware restraints provided.