



LOS FLEXI
CRAFTING YOUR HOME STORY



XT3 Two-Piece Corner Toilet

INSTALLATION & CARE GUIDE

cs@losflexi.com

www.losflexi.com

+1 (662) 502-5099

PRIOR TO INSTALLATION:

GET READY TO TRANSFORM YOUR BATHROOM! INSTALLING YOUR LOS FLEXI TOILET

Hello, DIY Champion!

Before you embark on the exciting journey of installing your sleek Los Flexi toilet, let's ensure you're fully equipped to tackle this task with finesse.

We're here to guide you through this process with clear and user-friendly instructions, making it as easy as a warm handshake.

Before You Dive In:

- Take a moment to peruse these instructions, ensuring you have the right tools and materials on hand. This step is your secret weapon to success.
- Give your new Los Flexi toilet a quick once-over to make sure it's in perfect condition after its voyage to your home. We want it to shine as brilliantly as it's designed to.
- Show your commitment to following the plumbing and construction regulations in your area. We're all about keeping things on the up-and-up.
- Bid farewell to your old toilet. Trust us; this upgrade will redefine your bathroom experience!

Here's a valuable tip: Ensure that your water supply pressure meets or exceeds a minimum of 35 PSI (2.5 kg/cm²). This is the power your new toilet needs to deliver peak performance. No pressure, no performance, right?

- Give that mounting surface a little love – cleanliness and levelness are the keys to a comfortable seat for your toilet.


You're all set, bathroom virtuoso! Get ready to transform your bathroom into the talk of the town. Remember, we're just a message away if you require any assistance. Now, go ahead and install that Los Flexi toilet like the superstar you are!

Toilet Regards,
The Los Flexi Team



FOR HIGH-RESOLUTION DIGITAL MANUAL

TOOLS AND MATERIALS REQUIRED (Not Supplied)

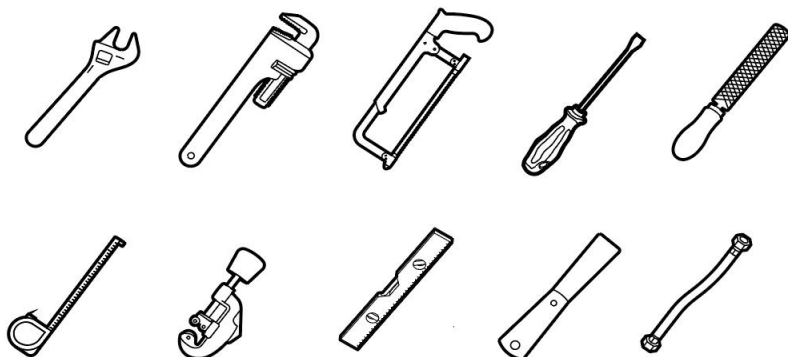

- | | |
|---------------------------------|---------------------|
| ❶ 10" (254mm) adjustable wrench | ❹ Tape measure |
| ❷ 12" (305mm) pipe wrench | ❺ Tubing cutter |
| ❸ Hacksaw | ❻ Level |
| ❹ Flathead Screwdriver | ❼ Putty knife |
| ❺ Metal file (file cut) | ❽ Water supply line |

PACKAGE INCLUDED:

- Two-Piece Corner Toilet
- Toilet Seat
- Installation Kit

NOTE: The actual accessories included may differ in appearance from the illustrations. Such variations do not affect performance, and all components will operate as designed.

Quick heads-up: If your current toilet doesn't sport a supply shut-off valve beneath the tank, make sure to pop one in before you dive into setting up your shiny new throne.


START INSTALLATION

1. Remove Old Toilet

- Turn off the water supply.
- Flush the toilet to empty the tank. Remove any water left in the tank or bowl.
- Disconnect the supply line from the tank.
- Remove decorative caps. Unscrew nuts that attach the toilet to the floor. Remove toilet.
- Make sure the water supply valve is shut off before installation.
- Remove old toilet bolts from toilet flange. Clean any old wax, putty, etc. from base area.

2. Install or relocate the water supply and outlet as necessary to conform to the rough-in dimensions of your new toilet. Ensure that the shut-off valve is greater than $7\frac{1}{2}$ " from the center of the drain to the center of the shut-off valve on either side.



NOTE: This is a true 12" rough-in toilet from finished wall to center of the drain (no less than 12"). Baseboard thickness may reduce rough-in dimension.

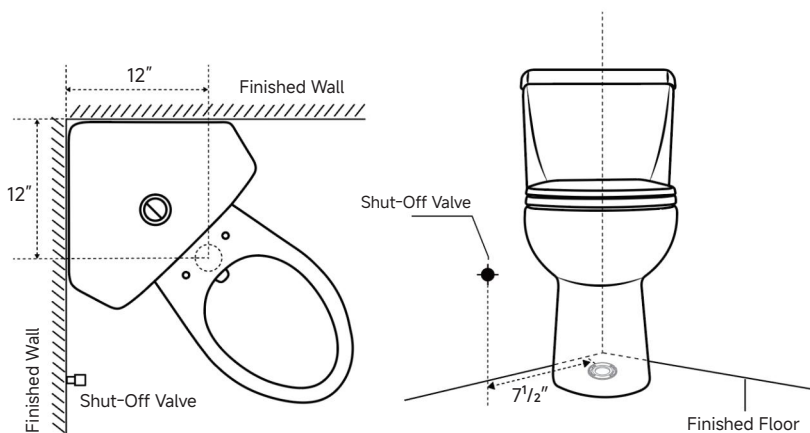

3. If replacing a toilet, scrape off and remove all wax residue with a cleaner. Toilet horn must be clean and dry.




4. Insert the new T-bolts and plastic washers. (Flange is not included.)

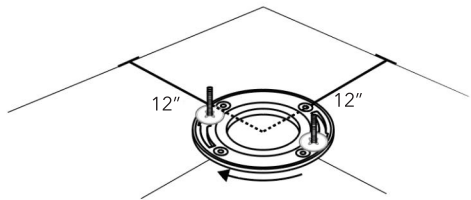


5. Set the tank on the bowl, align the gasket with the hole, and tighten the nuts until steady.

NOTE: Numbers ①, ②, and ③ show the installation sequence. Please follow them to install the components.□

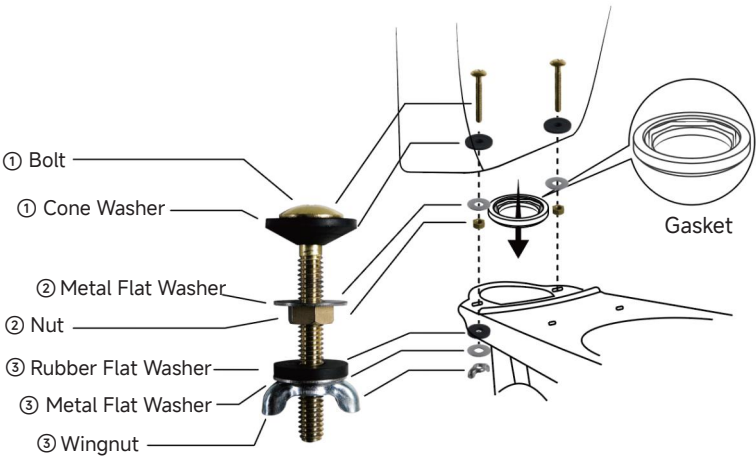


6. Place the wax seal.

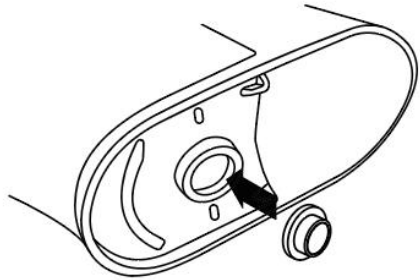


7. Apply weight evenly.




8. Install floor mounting kit as shown below. DO NOT OVERTIGHTEN!

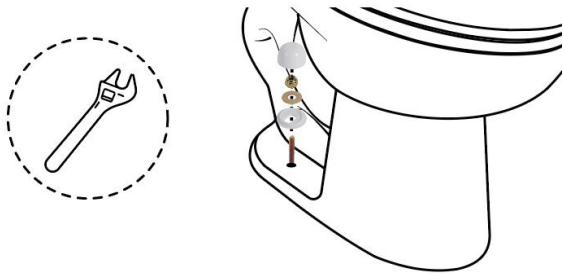

9. Cut excess from the bolts and affix bolt caps.

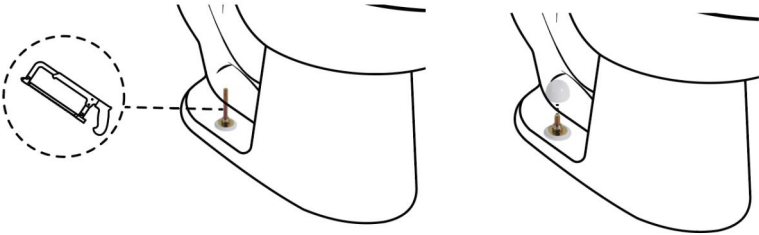


10. Connect the water supply line. A $\frac{7}{8}$ " to $\frac{1}{2}$ " fill valve adapter is included for optional use. DO NOT OVERTIGHTEN!

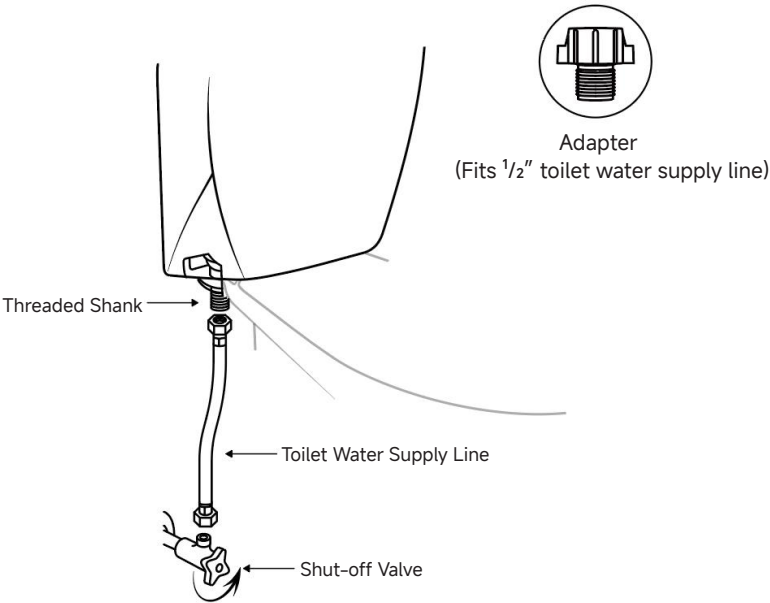


11. Install the flush button.

①




Attach the button to the tank lid.

②




Tighten the plastic nut underneath the tank lid.

③




Place the tank lid onto the toilet and test the flush button. Cut and adjust the rods if needed.


12. Install seat per the seat instructions provided. Use the supplied components.
After installation, flush several times and check for leaks.




Pre-assembled Fitting

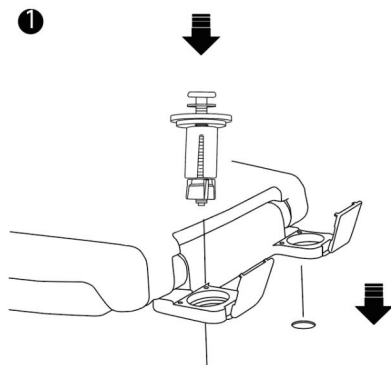

Insert the assembled fittings into the mounting holes.

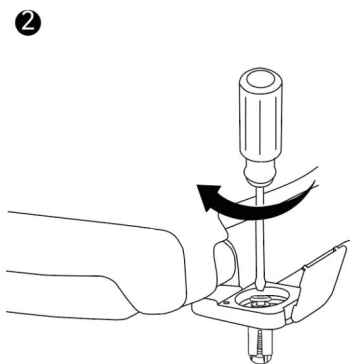

Adjust the seat position and tighten the screws to secure.

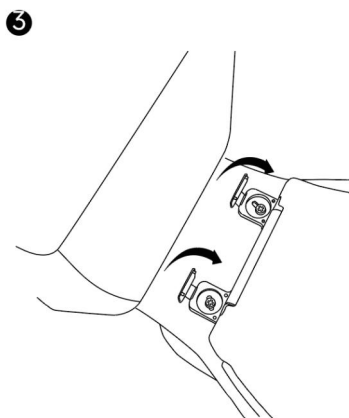

Snap on the hinge covers.

IMPORTANT CONSUMER INFORMATION

Consumer Responsibilities

- If you live in a hard water area, make certain that the holes in the toilet rim are kept clean to ensure proper bowl flushing.
- Toilet bowl cleaners should be used at least once a week.
- Use a long-handled brush to clean the rim holes and to clean as far into the trap as possible to prevent mineral deposits from forming.
- Most toilet bowl cleaners are not harmful to the vitreous china surface of the toilet bowl. Please follow the bowl cleaning instructions carefully.

Warning

- DO NOT USE ABRASIVE CLEANERS OR SOLVENTS.
- DO NOT USE ANY CEMENT WHILE INSTALLING THE TOILET.
- Expansion due to heat may damage the base of the toilet. Los Flexi will not be responsible for any heat damage.
- Do not throw material into the toilet can easily clog such as newspaper, paper towels, or sanitary napkins.
- Take care not to strike vitreous china with force to prevent damage and leaks.
- Do not use the toilet with water below 0°C (32.0°F).

FAQS

QUESTIONS	ANSWERS
Q1: What if my wall angle isn't exactly 90 degrees?	A: This is fairly common. Shims or plumber's putty can help level and secure the toilet during installation.
Q2: How much clearance should I leave around a corner toilet?	A: For comfortable use, it's recommended to keep roughly 15 inches from the centerline to any wall or fixture and 21 to 24 inches of clearance in front.
Q3: Can I install a corner toilet with a standard toilet flange?	A: Yes. A standard flange works as long as it's positioned correctly in the corner. In some setups, a corner-specific or offset flange may make alignment easier.□

PRODUCT CLEANING & CARE

- Do not use in-tank cleaners in your toilet. Products containing chlorine can seriously damage fittings in the tank. This can cause leakage and damage.
- Do not use cement while installing toilet.
- Wipe surfaces clean and rinse completely with water immediately after applying cleaner. Rinse and dry any overspray that lands on nearby surfaces. Do not allow cleaners to soak on surfaces.
- Use soft, dampened sponge or cloth. Never use abrasive materials such as hard-bristl-brushes or scouring pads to clean surfaces. Use of any abrasive materials may damage the porcelain glaze.
- If you live in a hard water area, make certain that the rim-jet holes underneath the rim of the toilet bowl are kept clean to ensure proper flushing.

TROUBLESHOOTING GUIDE

PROBLEMS	RECOMMENDED ACTIONS
Poor Flush	• Adjust the tank water level to match the waterline. • Fully open the water supply shut-off valve. • Clear obstructions from the trapway, jet or rim holes.
No Flush	• Clean or replace the flapper if it is worn, dirty, or misaligned with the flush valve opening. • Clean area around the flush valve opening to allow flapper to seal. • Adjust the tank water level if it is too high. • Replace the fill valve if the valve float sinks.
Tank Takes Excessive Time To Fill	• Fully open the water supply shut-off valve. • Check supply line for a kink and remove if necessary. • Clean valve inlet, valve head, or supply line. <u>Flush lines to clear any debris.</u>
There Is Excessive Noise When The Tank Is Filling	• Partially close the water supply shut-off valve if the water pressure to the toilet is too high. Check the toilet performance following any such adjustment. • Remove dirt or obstructions from the fill valve head. Flush the lines to clear any debris.
Toilet Does Not Shut Off	• Clean debris from seal surface. Replace flapper seal as needed. • Readjust chain length as needed.
Toilet Bowl Rocks After Installation	• Retighten floor mounting kit. • Use toilet shims and/or place a bead of caulk around the base of the toilet.

LIMITED WARRANTY COVERAGE

TWO YEAR LIMITED WARRANTY

Los Flexi products are crafted with superior materials and impeccable workmanship, offering our customers reliable and long-lasting products. If defects in materials or craftsmanship are detected under standard use within the first two years of installation, Los Flexi will either supply replacement parts at no charge or, if deemed necessary, replace the product or its parts. This warranty is exclusive to the original purchaser, and proof of purchase is mandatory for any claim.

This Warranty Will Be Voided If:

- The product's installation did not follow our recommendations.
- The product was relocated from its initial installation site.
- The product underwent any modifications from its original condition.
- The product suffered from neglect, misuse, chemical overuse, accidents, or any other damages.

Los Flexi does not imply that our products adhere to local building or plumbing codes. Consumers must ascertain local code compliance before and during installation. This warranty is strictly for the original purchaser and first consumer.

Los Flexi won't be held responsible for any consequential damages linked to the product's installation, replacement, return, or usage. This includes, but is not limited to, freight charges, labor, downtime, home damages, and other associated costs (e.g., professional services, investigations, audits, legal fees).

This Los Flexi warranty clearly delineates our liability. Items not specified in this warranty fall outside Los Flexi's responsibility. In states with variations concerning implied warranties, our compliance is ensured.

For any queries or concerns, feel free to reach out to us
at

Email: cs@losflexi.com

Site: www.losflexi.com

Voicemail : +1(662) 502-5099