




①	canopy 1PCS	③	chain 1PCS	④	light fixture 1PCS	⑥	light arm 6PCS
②	cap nut 2PCS			⑤	splicing connector 2PCS	⑦	lock nut & teeth lock washer
⑧	bottom ball 1PCS	⑨	cylinder tube 6PCS	X 1PCS		X 3PCS	X 3PCS
				X 3PCS		X 3PCS	X1PCS

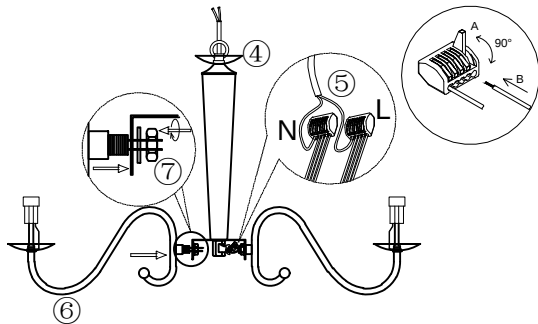


1. Install the light arm ⑥ to the fixture ④ with lock nut & teeth lock washer ⑦.
2. Connect all the wires by parallel with connectors ⑤ (all live line-L use one connector, and neutral Line-N use another connector).

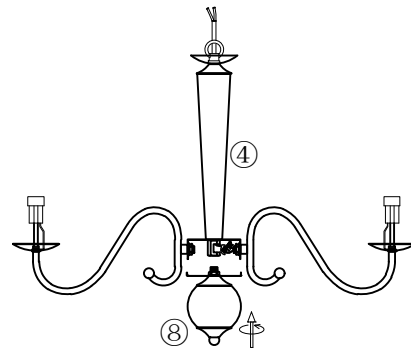

3. Rotate to install the bal ⑧ to the fixture.

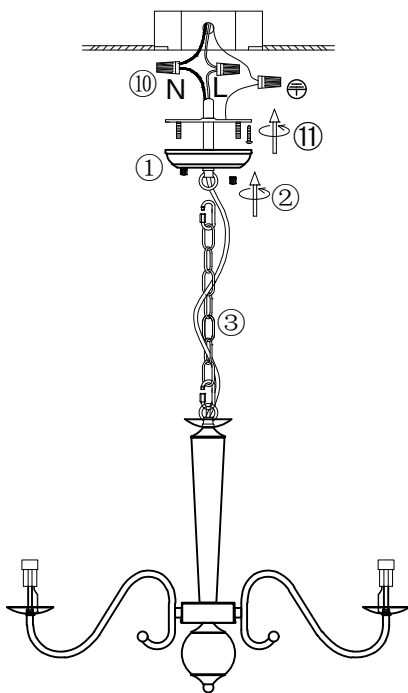

4. Hang the fixture to the canopy ① with chain ③, let the wire go through the chain ③ and canopy ①.
5. Install the bracket to the ceiling junction box with screw ⑪.
6. Connect the wire to the home line with cap connector ⑩.
7. Install the fixture to the bracket with cap nut ②.

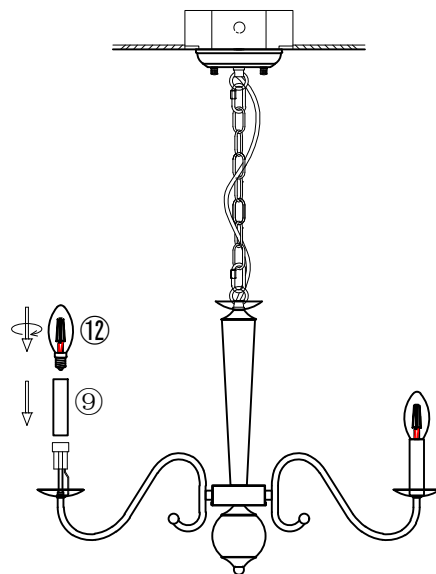

8. Put the cylinder tube ⑨ on top of bulb holder.
9. Install the bulb ⑫.

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !

Only a professional electrician should install this kind of product !