


①	light arm 6pcs ①	⑦	⑦ hanging tube 1pcs	
②	② lock nut & teeth lock washer	⑧	⑧ chain 1pcs	
③	③ connected round plate	⑨	⑨ cylinder tube 6pcs	
④	④ cover	⑩	⑩ canopy 1pcs	
⑤	⑤ end cap	⑪	⑪ cap nut 2pcs	
		X 1PCS	X 3PCS	
⑥	⑥ cap connector 3pcs	X 1PCS	X 3PCS	
		X 3PCS	X 3PCS	



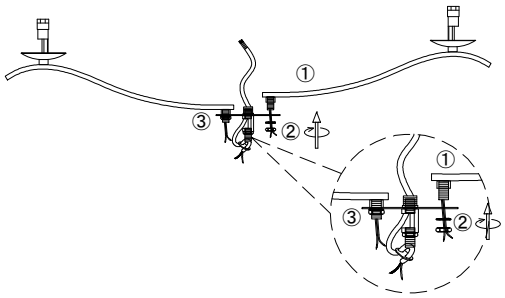


1.Install the light arm ① to the connected plate ③ with lock nut & teeth lock washer ②, after that adjust the arms to suitable position.

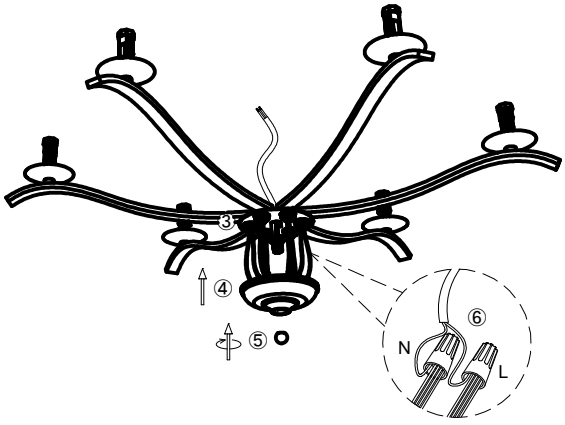


2.Connect all the wires by parallel with connectors ⑥(all live line-L use one connector, and neutral Line-N use another connector).


3.Close the cover ④ to the plate ③ with end cap ⑤.

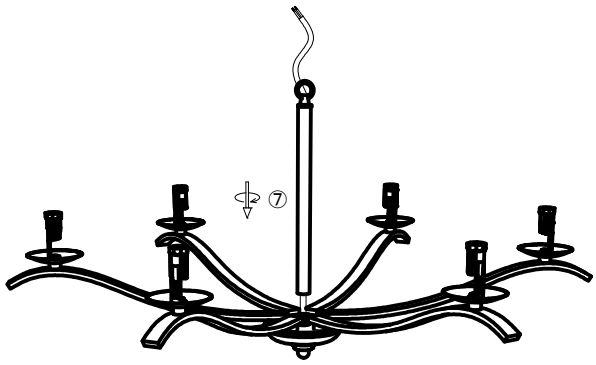

4.Let the wire of the fixture go through the tube ⑦, rotate to install the tube ⑦ to the fixture.

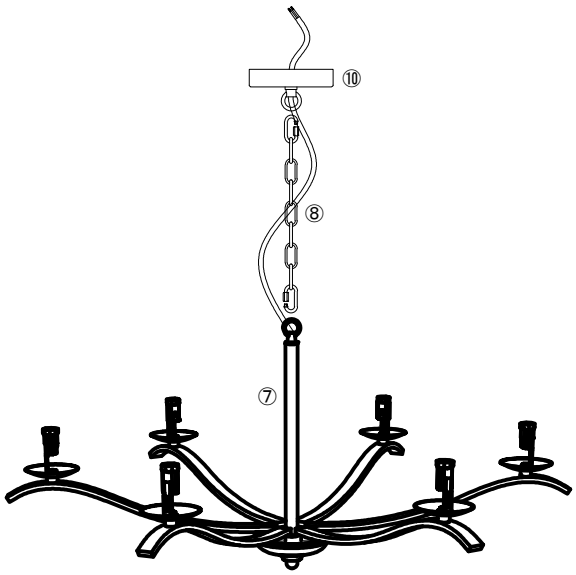

5.Hang the fixture to the canopy ⑩ with chain ⑧, let the wire go through the chain ⑧ and canopy ⑩.

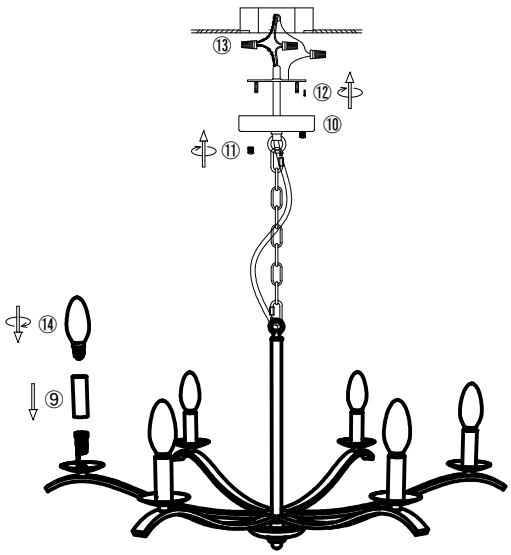

6.Install the bracket to the ceiling junction box with screw ⑫.
7.Connect the wire to your home line with cap connector ⑬.
8.Install the fixture to the bracket with cap nut ⑪.
9.Put the cylinder tube ⑨ on the bulb holder and install the bulb ⑭.
(bulbs are not included in the package)

D0253-6

Please read carefully before installation!!!
Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !