




Installation of toilet bowl

I > Installation position specification

Remove water tank cover when installing toilet bowl to avoid fall-off damage.

- Rough-in: distance between wall to the centre of toilet outlet on floor

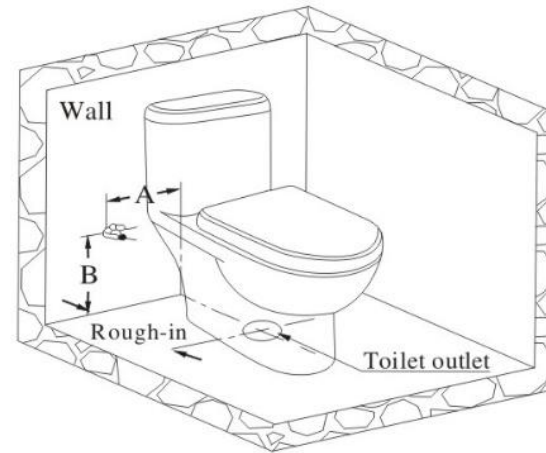

II > Installation

- ①. Attach rubber gasket on the toilet outlet rim, slide the toilet bowl slowly till its outlet aligned with floor waste pipe, compress it till tightly fixed on the floor.
- ②. Coat evenly with fungiproofing silica gel at the bottom of toilet bowl to keep it steady. (Please note: Cement & epoxy resin glue installing are forbidden.)

