



Product Installation Instructions



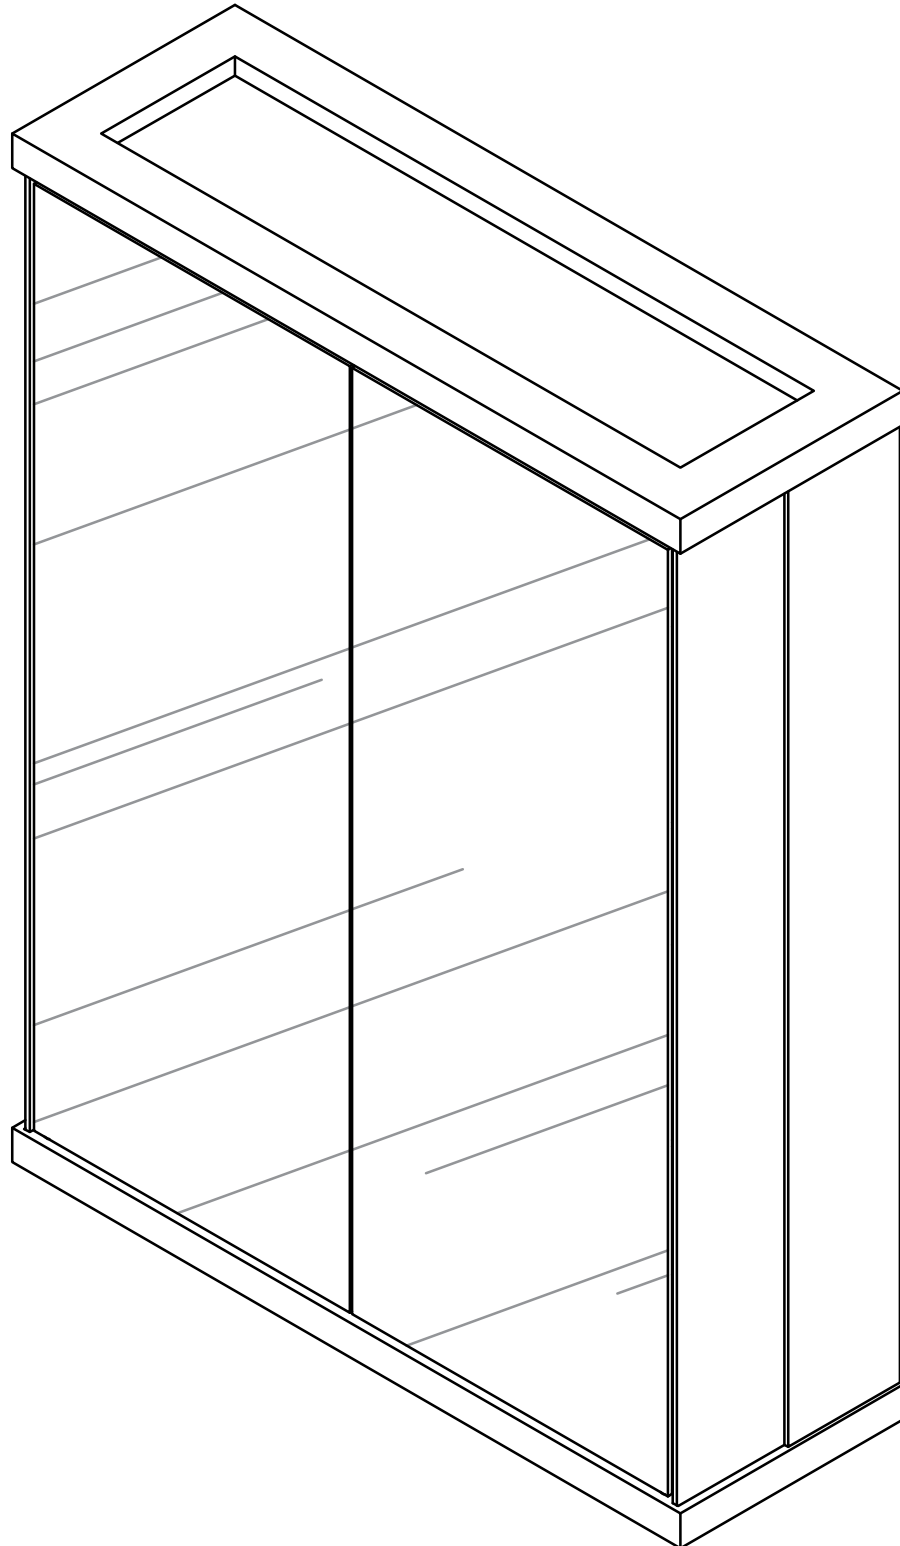


1x1




2x1




3x1



4x1




5x1




6x3



7x2




8x1




9x2




10x2





11x1

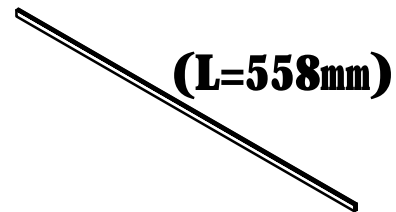


12x2




1

A		Two In One Screw (6x28mm)	22pcs +4pcs
B		Two In One Nut (10x12mm)	22pcs +4pcs
C		Laminated clamp	8pcs +1pcs
D		Rebound device & Screw (3x16mm)	4pcs +2pcs 1pcs
		Iron sheet	2pcs
		Hinge	8pcs 4pcs 4pcs
E		Fixing clip & screw (3x16mm)	8pcs +2pcs
F		extension cord	1pcs
G		Wire clamp	2pcs +1pcs
H		LED Strip Controlle	1pcs
I		AC/DC Adapter(12V=2.0A)	1pcs
J	 (4x45mm)	Anti Fall Hardware	3pcs




1pcs



Double-head screwdriver, use as required


2

Product structure decomposition

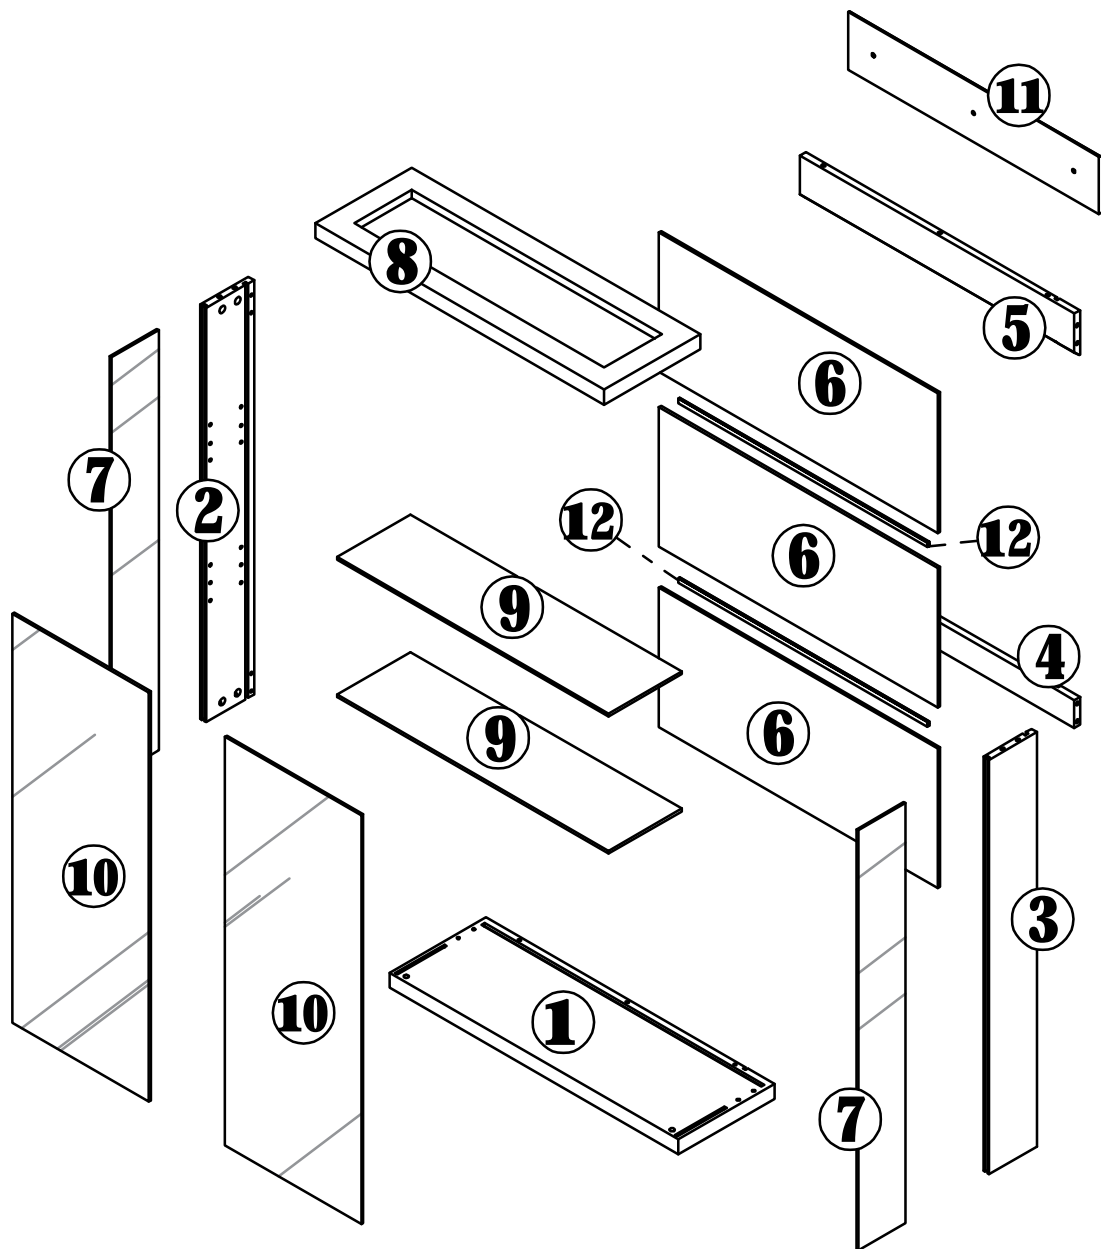


Use parts ① and ②



Step1

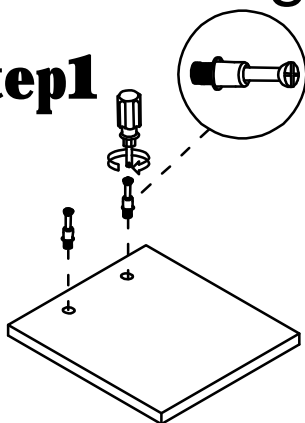


Step2

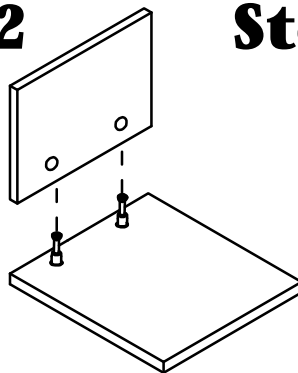

Step3

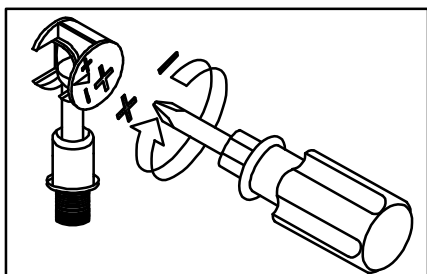



Use a screwdriver to lock in the direction of the "+" sign

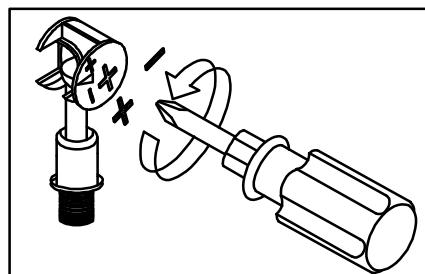

Disassemble along the direction of "-" sign

Step 1

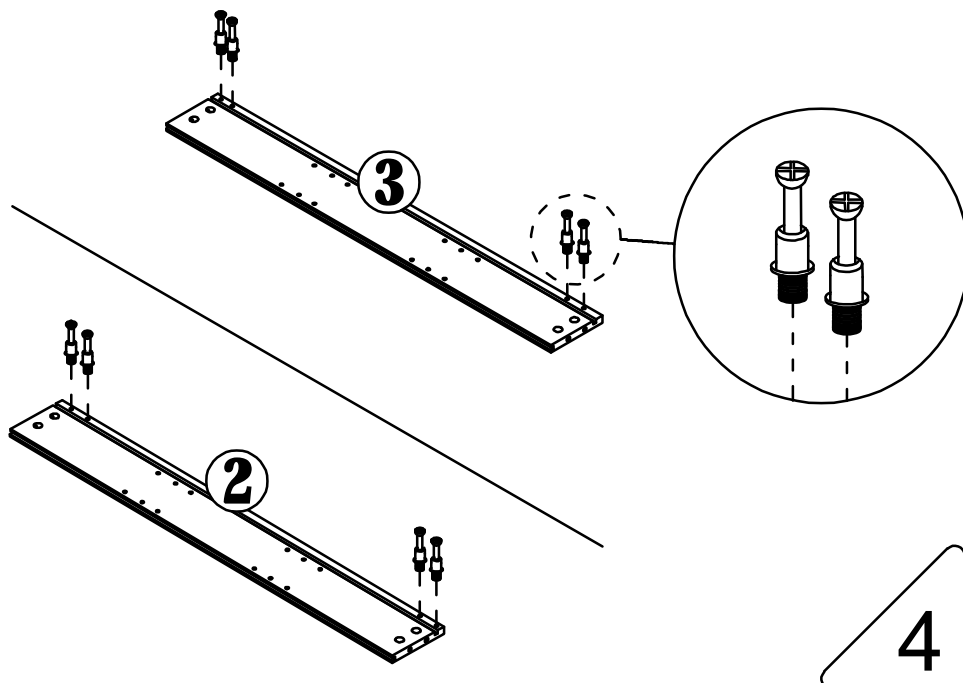


Step 2

Pay attention to the
installation direction of
panels 4 and 5

B




x8

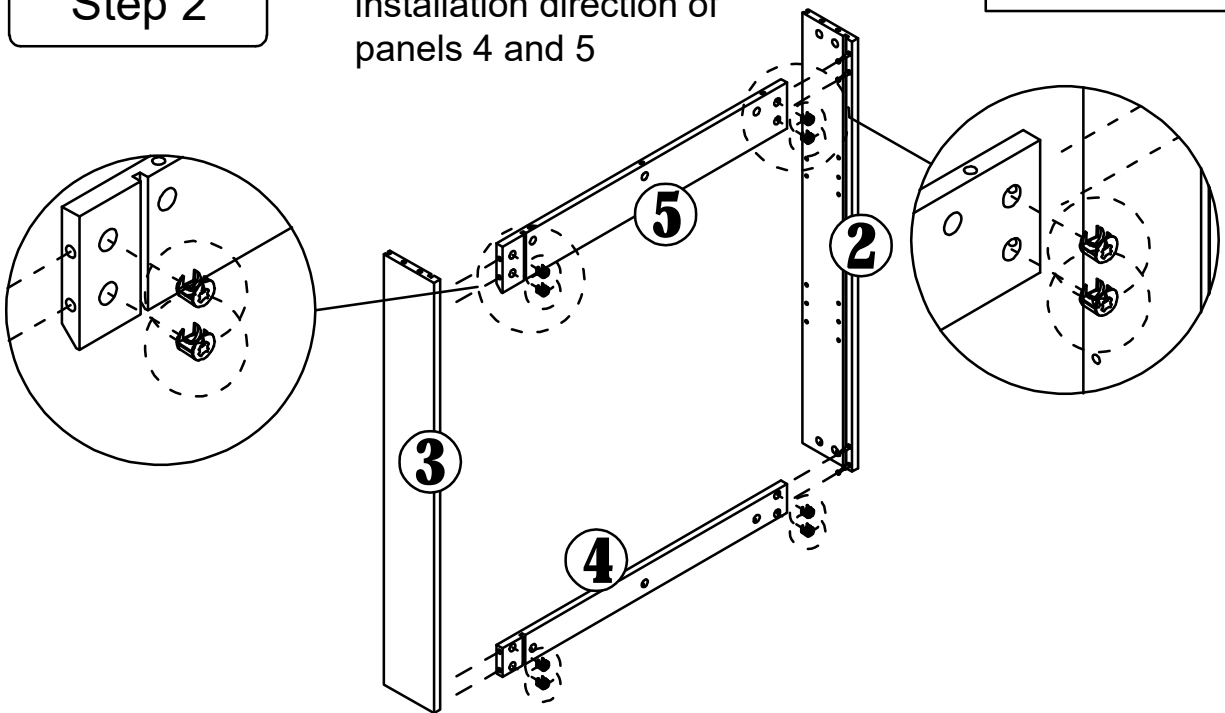


Step 3

A



x7

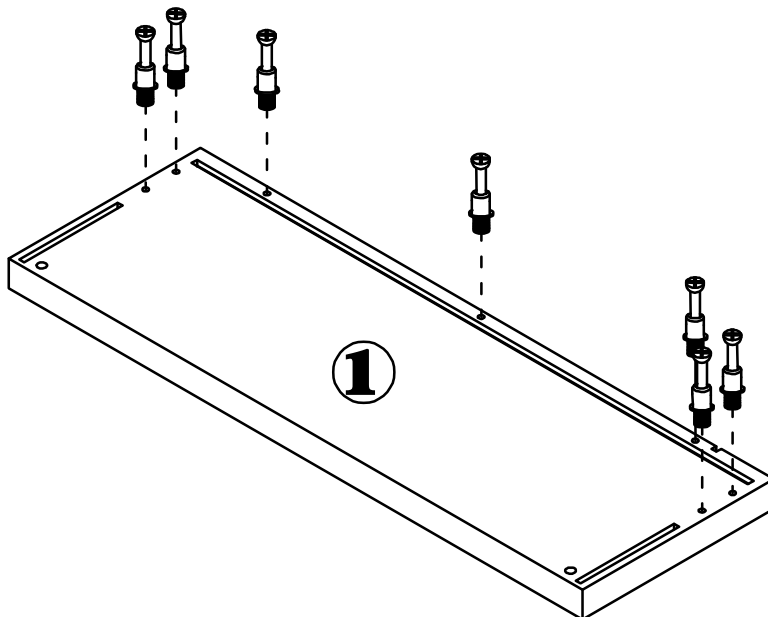


5

Step 4

B




x4

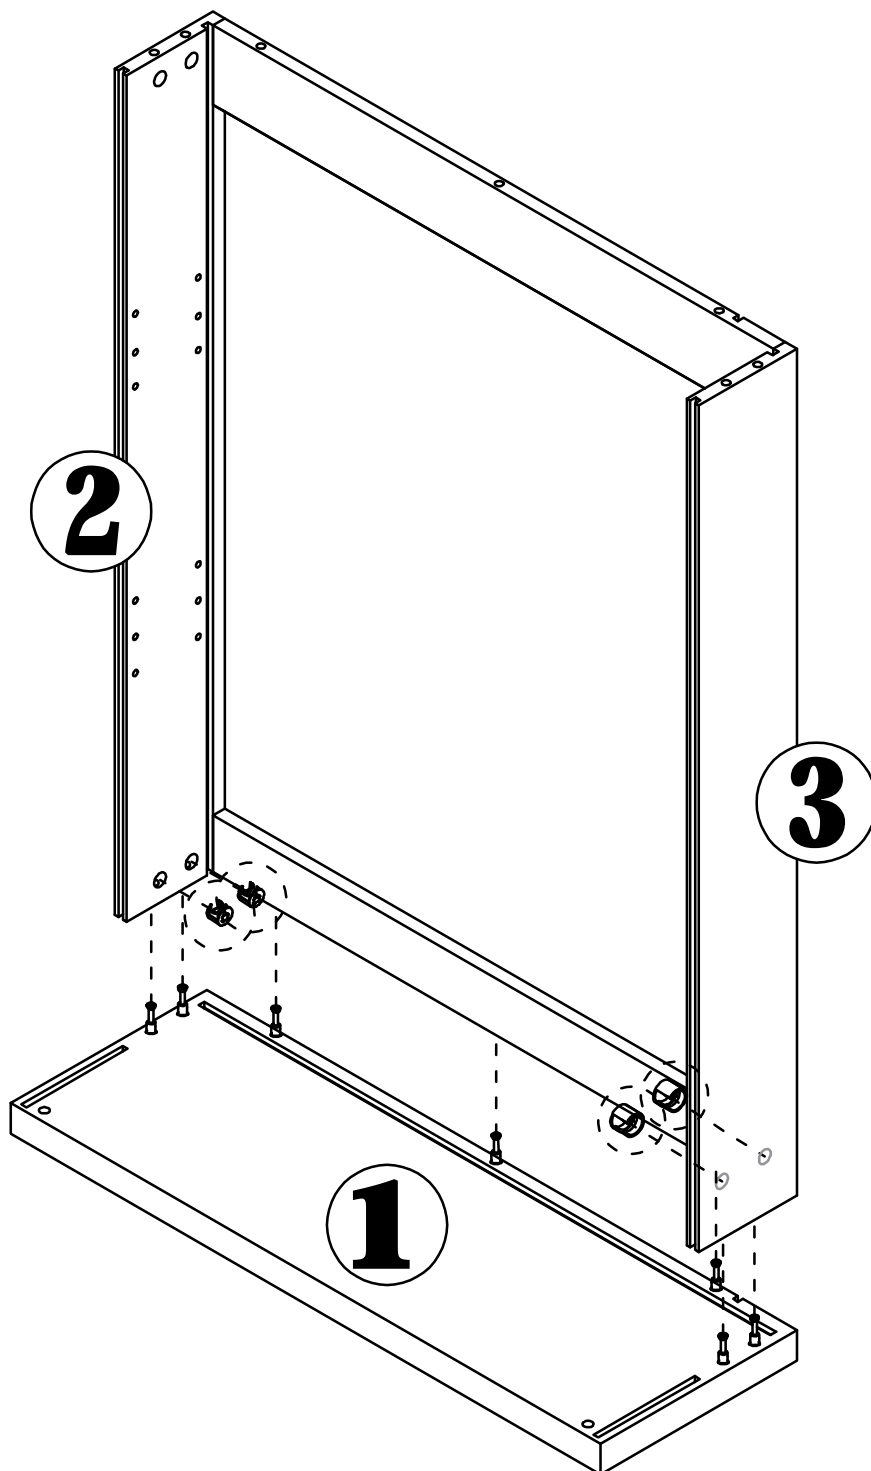


6





Step 6

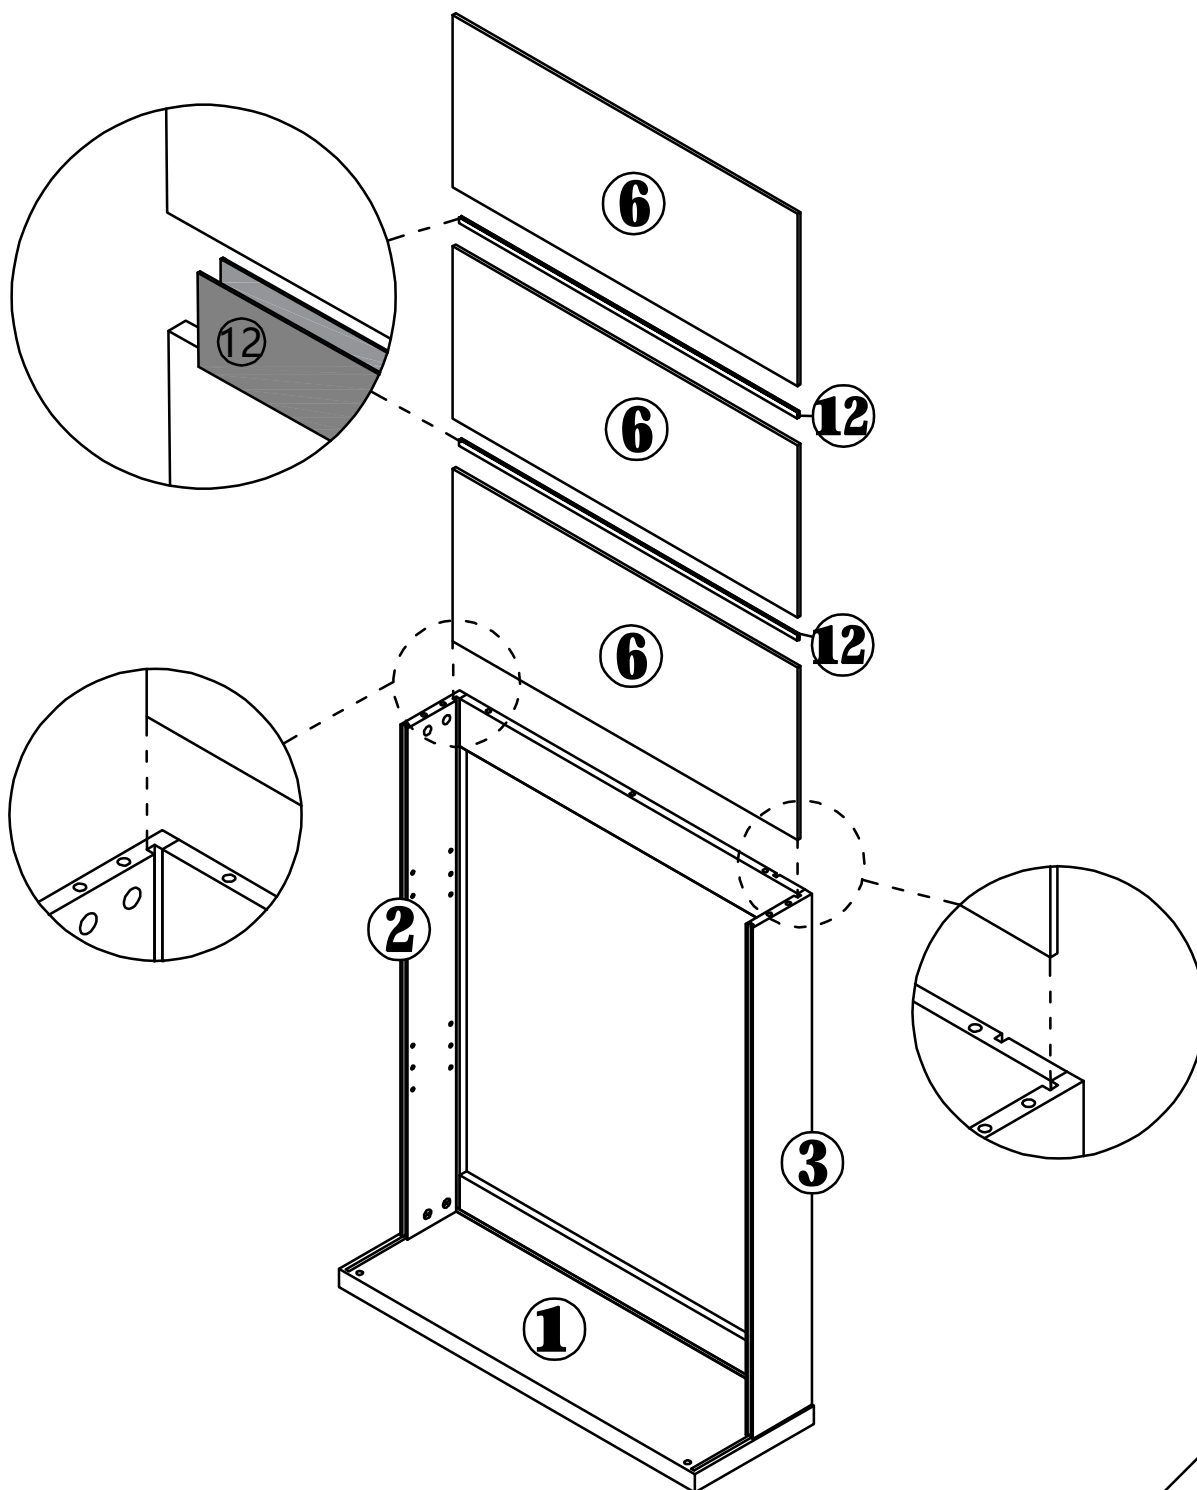




Step 7

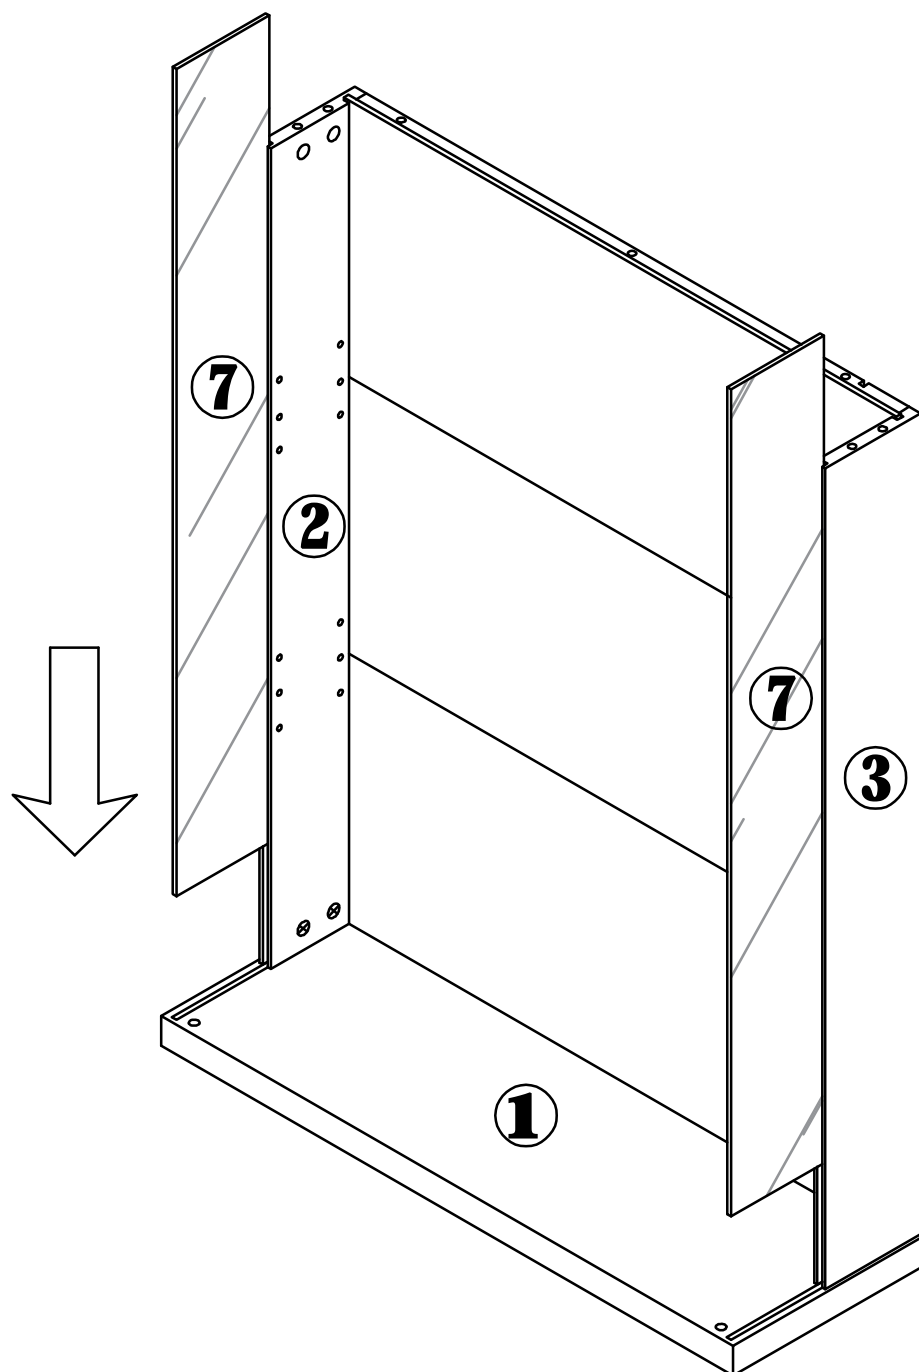

Step 8

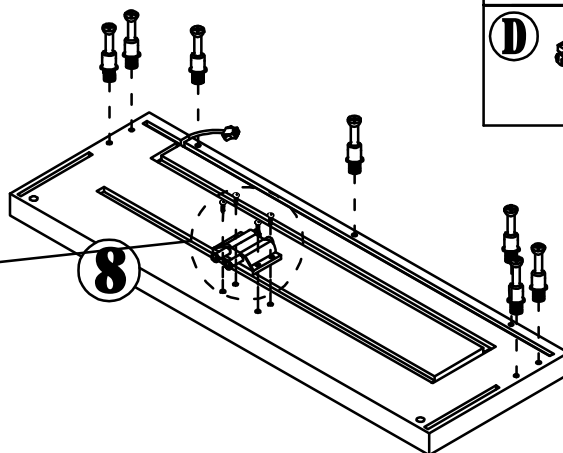

Step 9

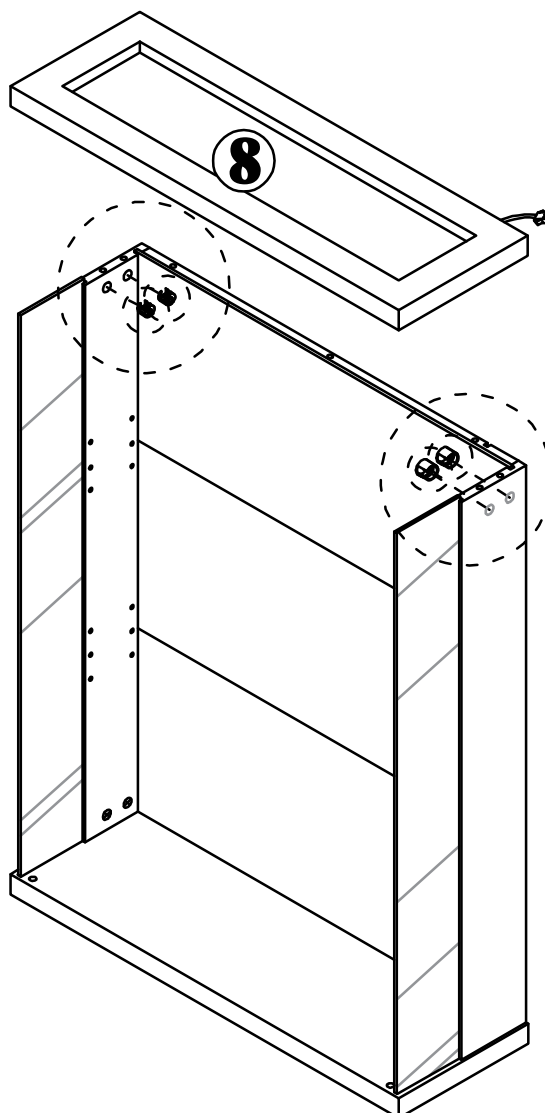


Step 10

B



x6

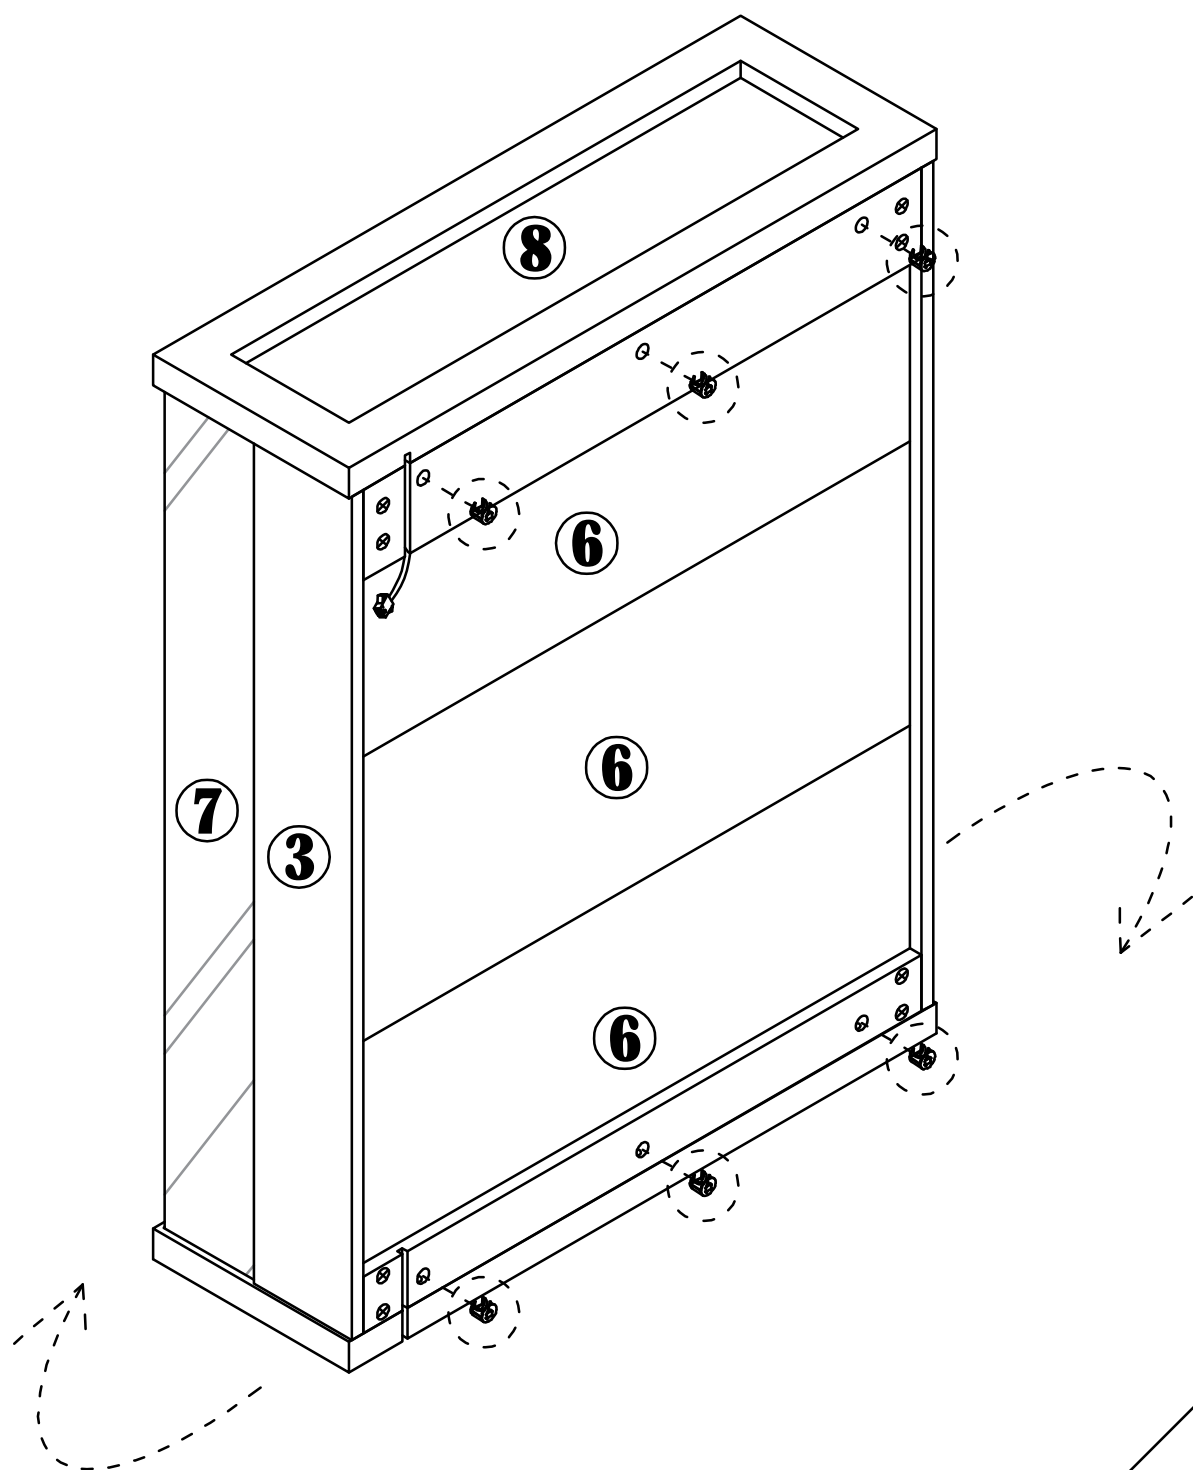


10

Step 11

C





x8

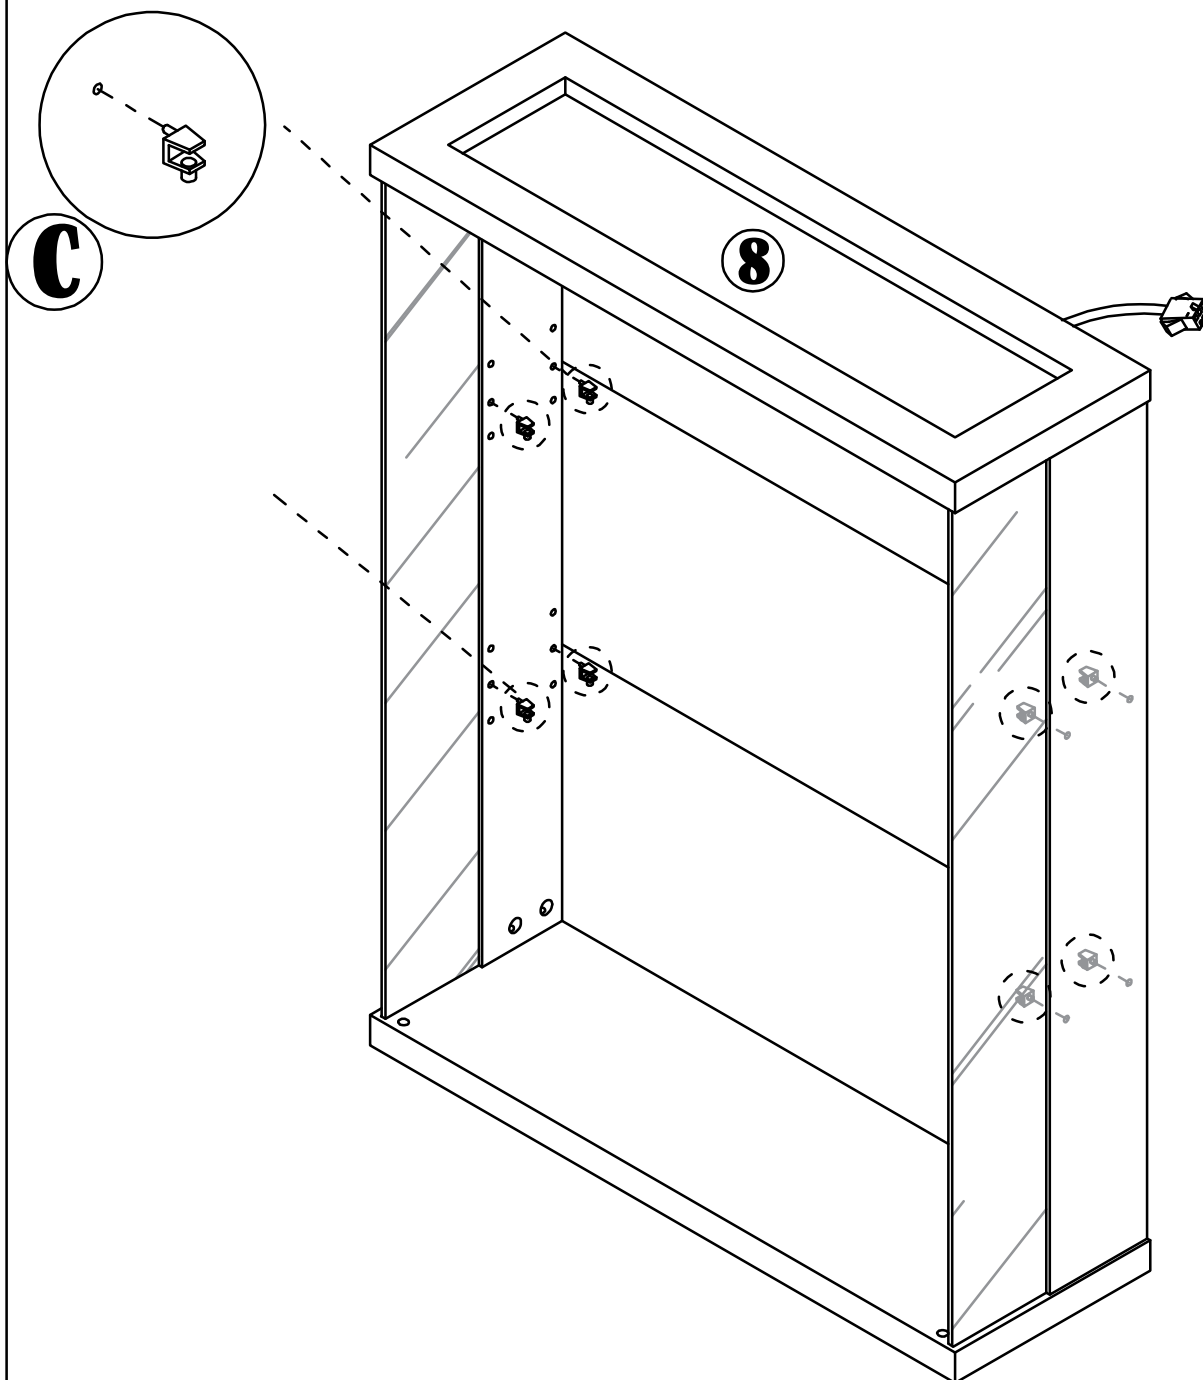

11

Step 12


Install at an upward
inclination of 45 to 90
degrees

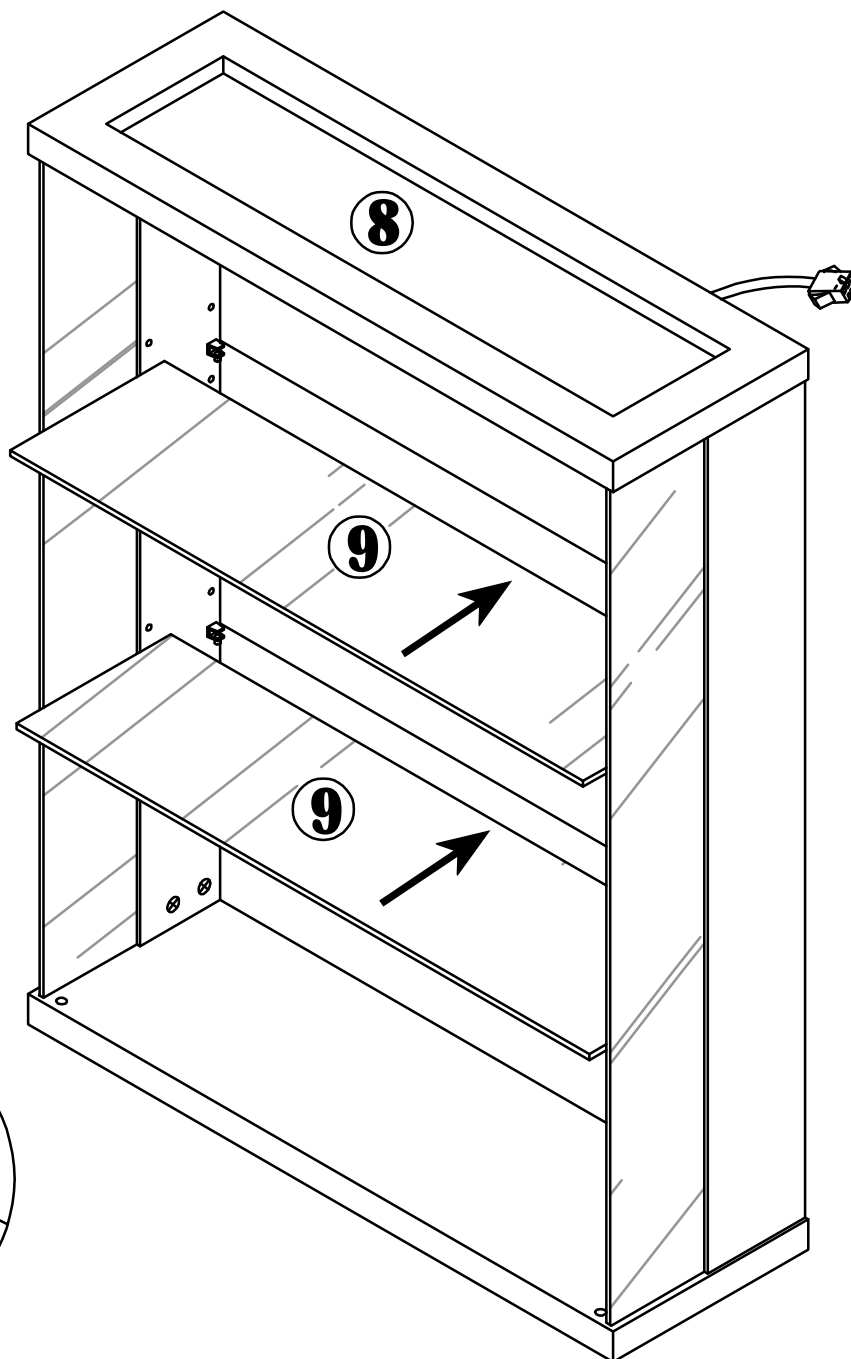


Note: after installing the
9 board, lock the pallet.

Step 13

First, completely unscrew the screws on the parts




Place the white gasket first, then install the hinge, and finally tighten the screws.




White gasket

D




x1




x1

Pay attention to the direction of the door hinge, and rotate the screws to compress the white gasket




White gasket



Locking screw

10




Iron sheet


If you feel loose, please pinch the accessory before installation

Step 14

First, completely unscrew the screws on the parts




Place the white gasket first, then install the hinge, and finally tighten the screws.




White gasket

D




x1



x1

Pay attention to the direction of the door hinge, and rotate the screws to compress the white gasket

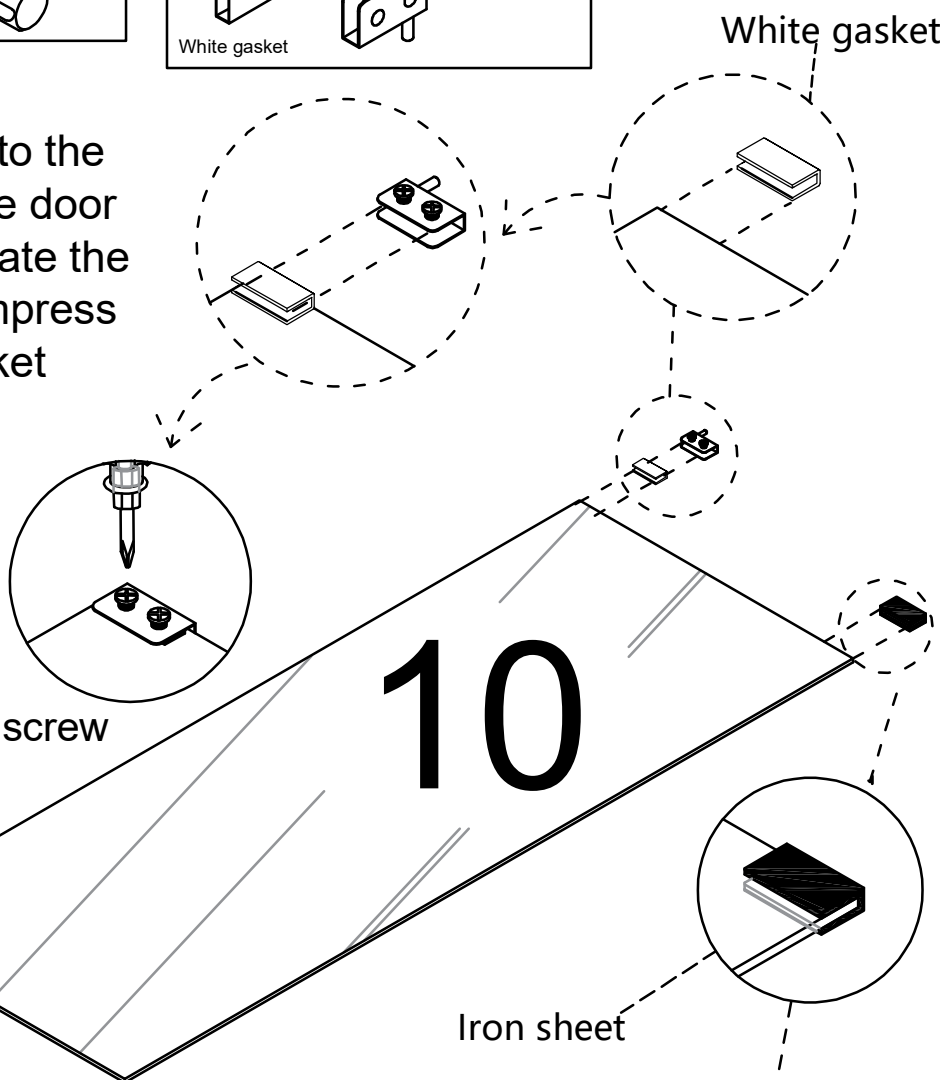



White gasket

Locking screw



Iron sheet

If you feel loose, please pinch the accessory before installation

Step 15

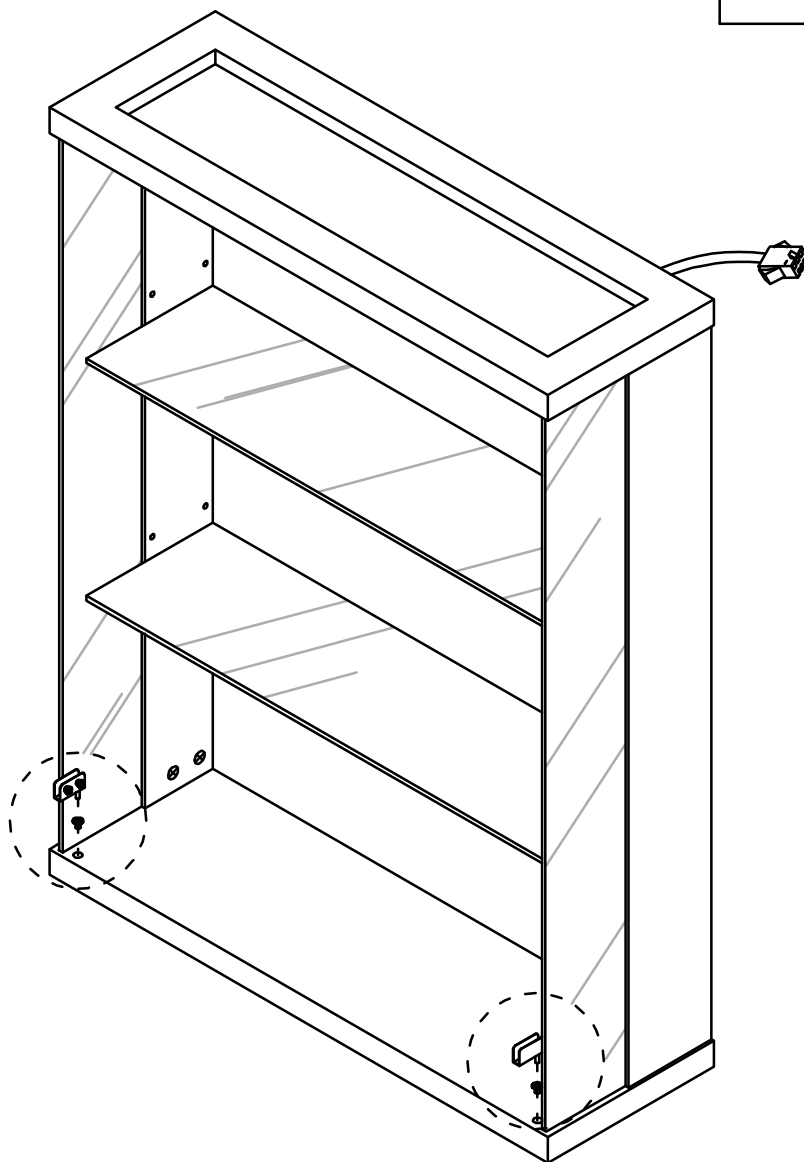


First, loosen the screws.

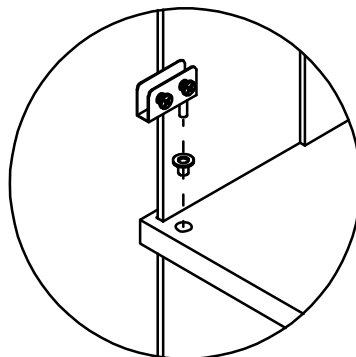


Step 16


Pay attention to the direction of the door hinge during installation



first

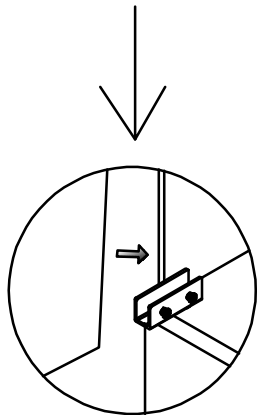


second

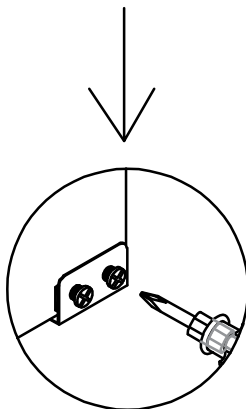

third

Locking screw


When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.

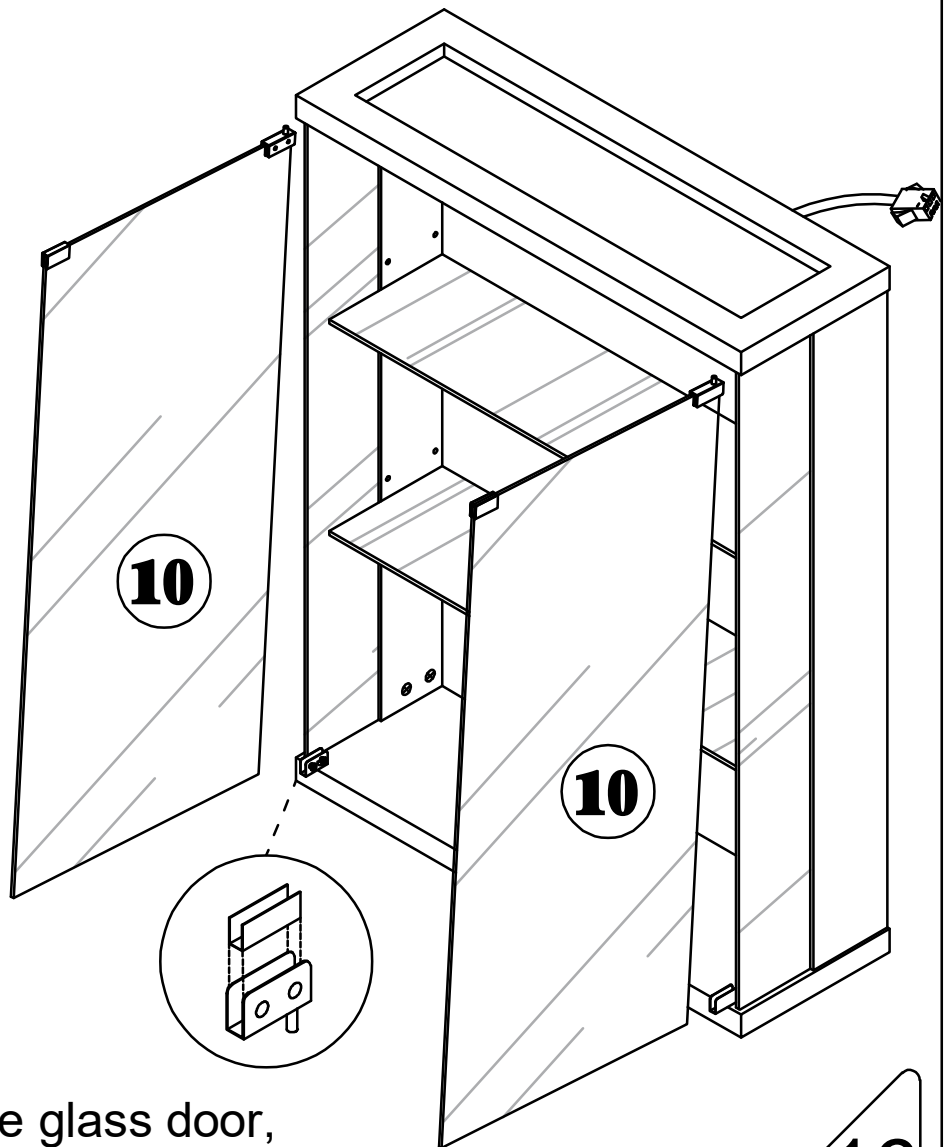

After aligning the glass door, tighten the screws to secure it.

Step 17



E  **x8**

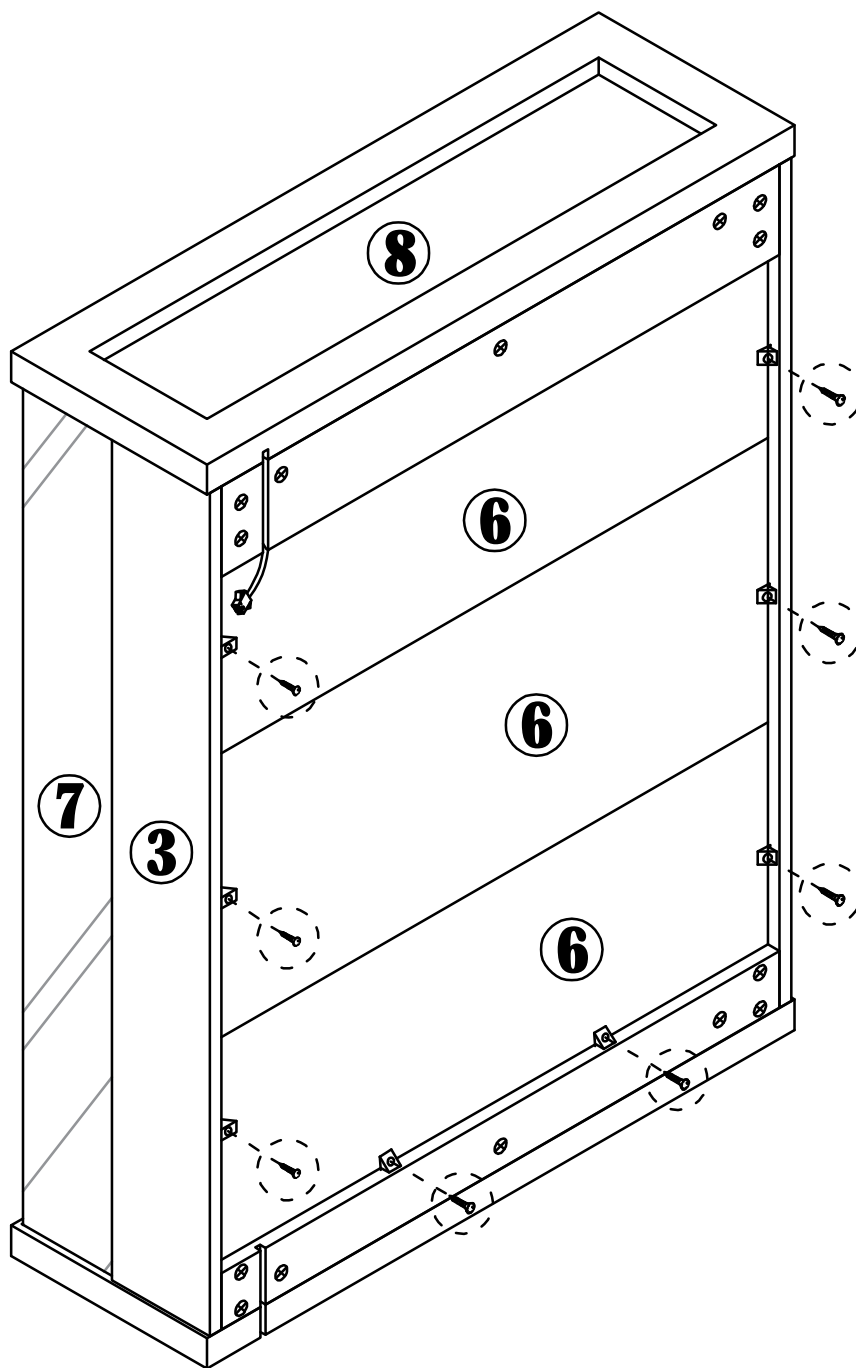

Step 18

F

— **x1**


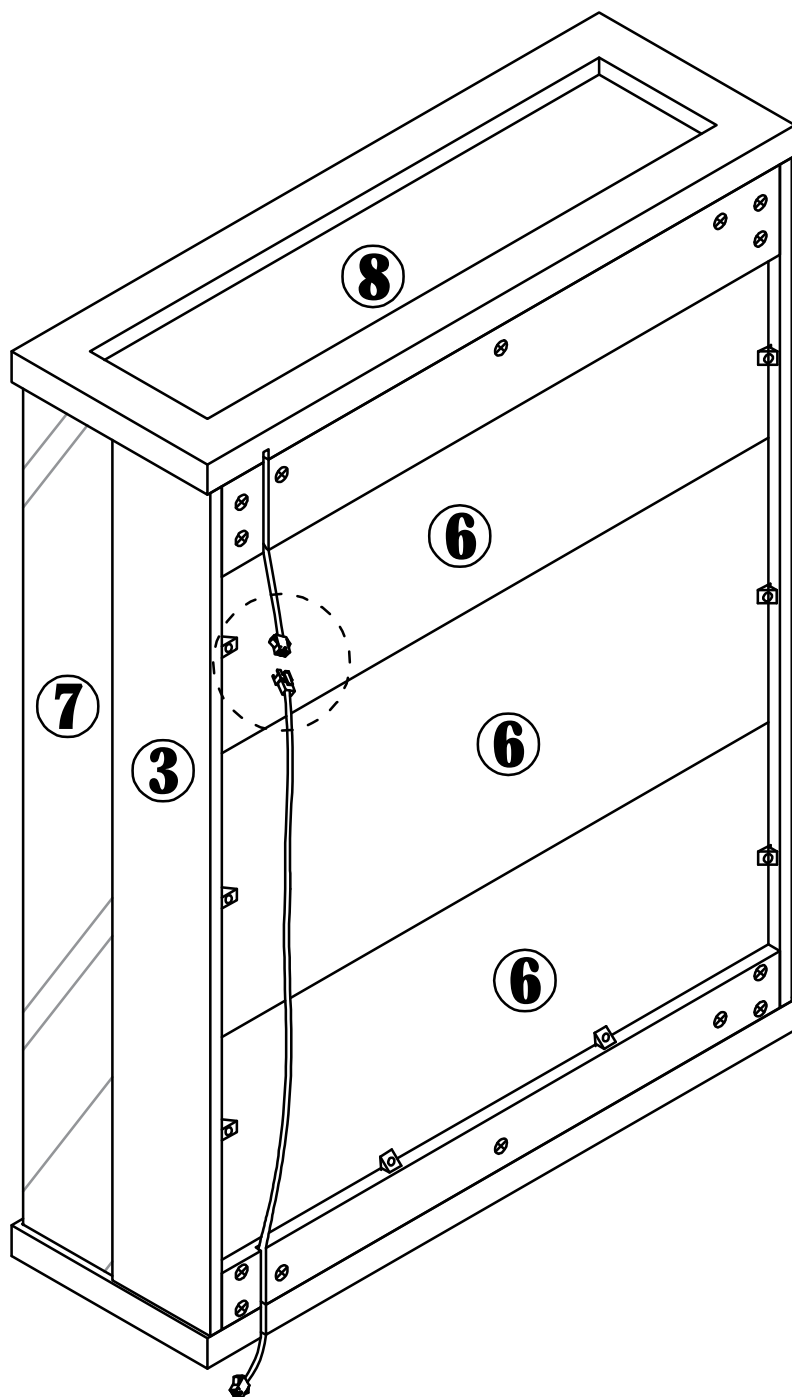


Step 18



G



x2

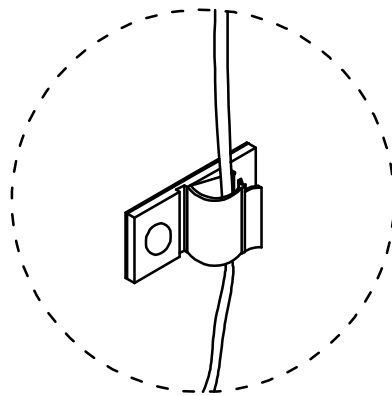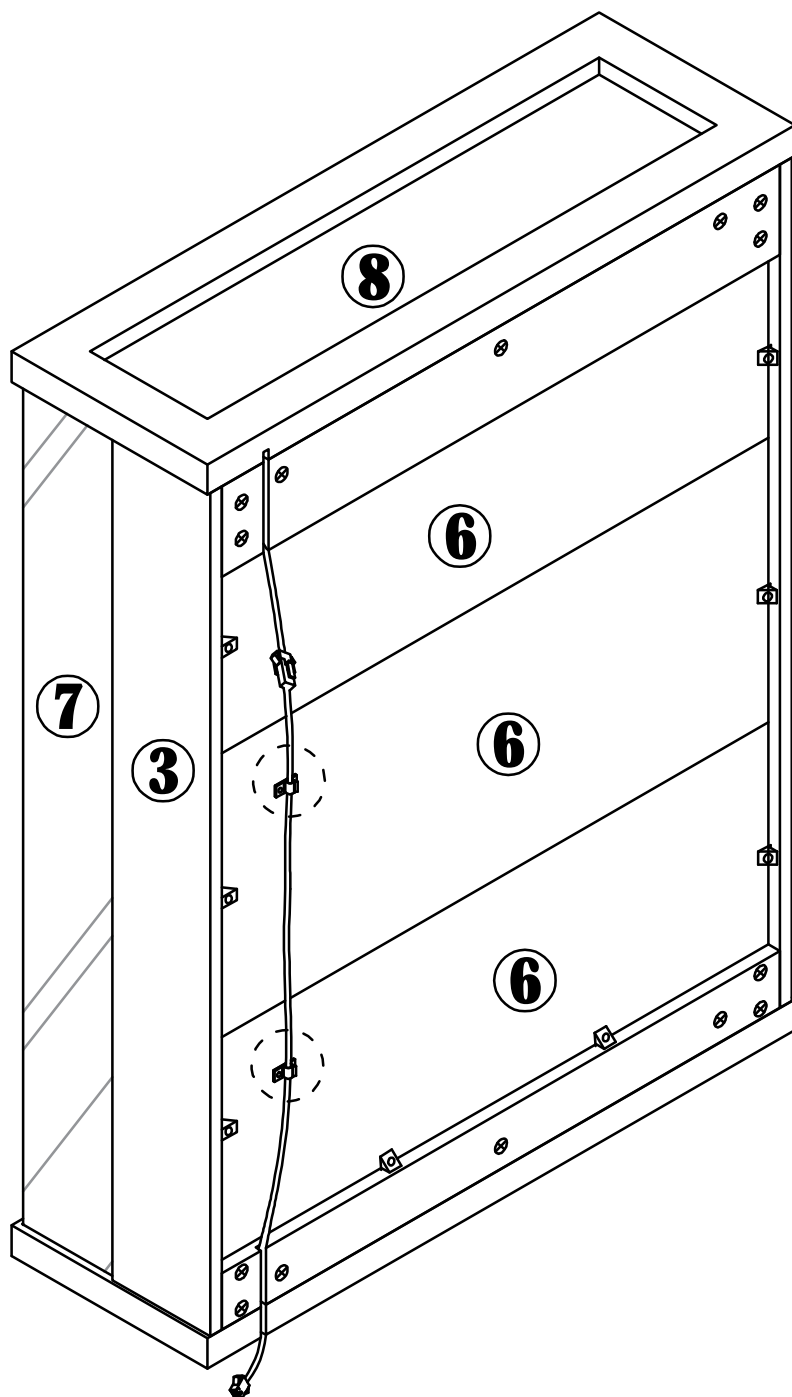


Step 19

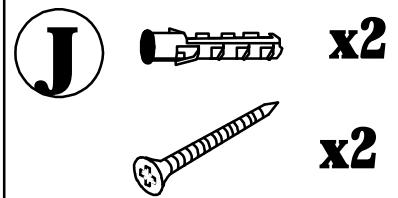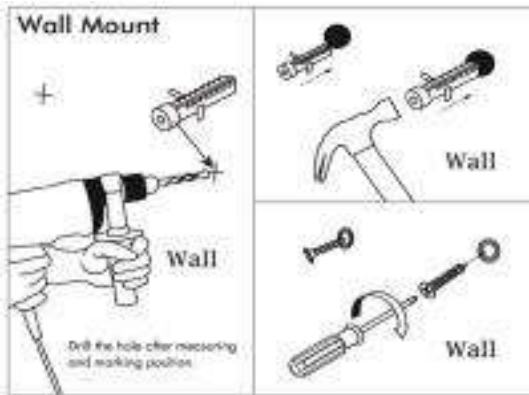

Step1:
Draw the position of the hole
on the wall with a pen


Step2:
Drill the hole with an electric drill
and punch in the colloidal particles

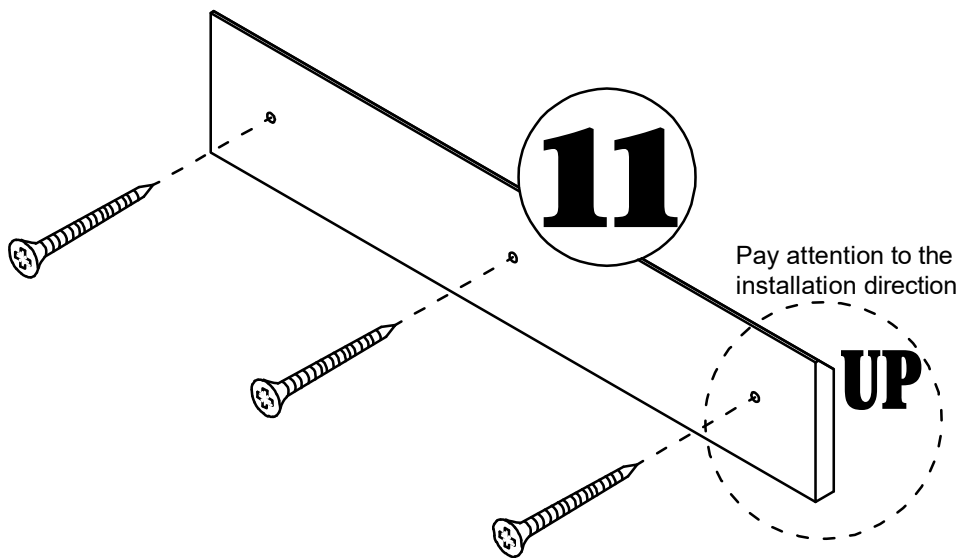

Install 11 on the wall


Step 20

Hang the cabinet on the wall

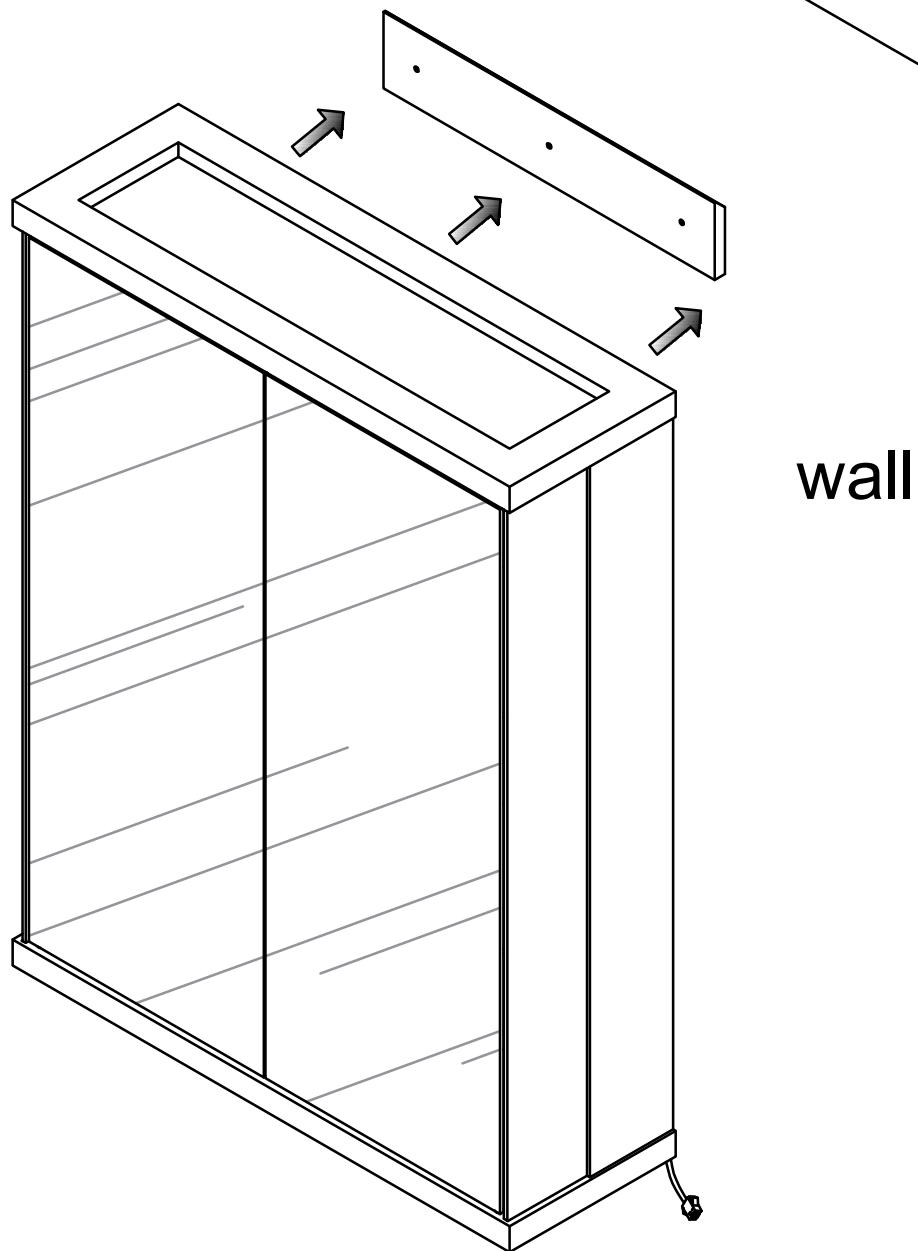




Step 21

H



x1


wall

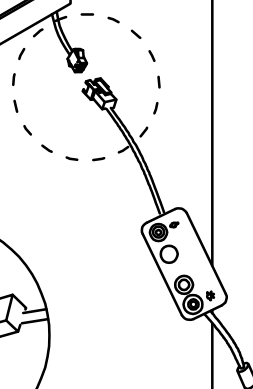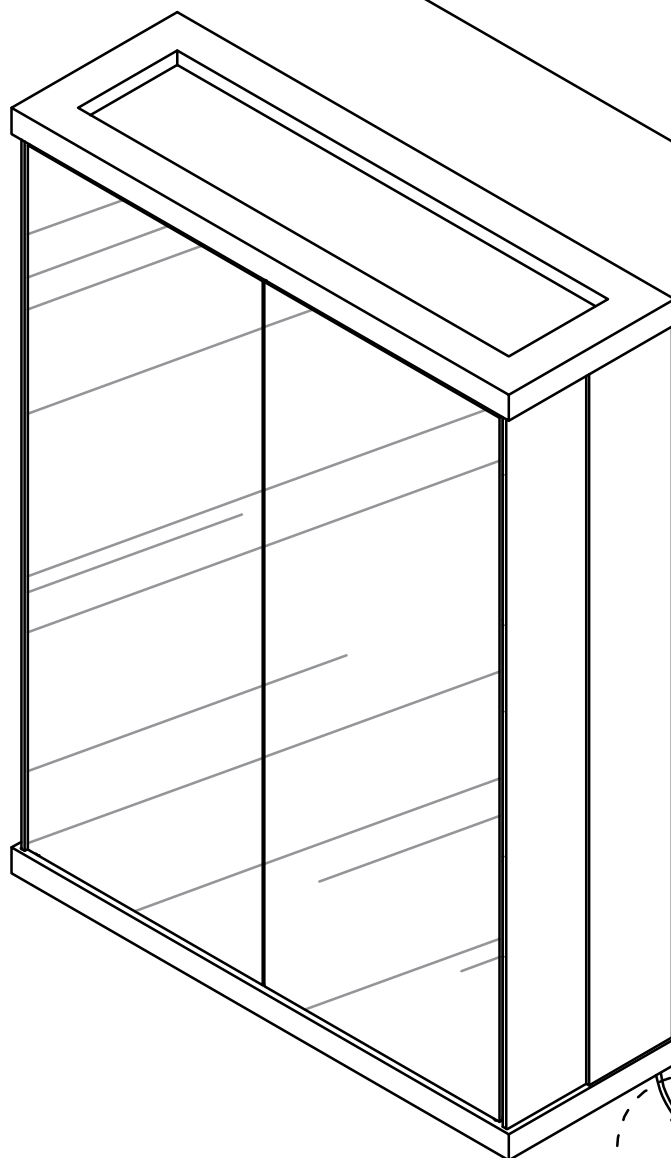

22




Step 22

I



x1

wall

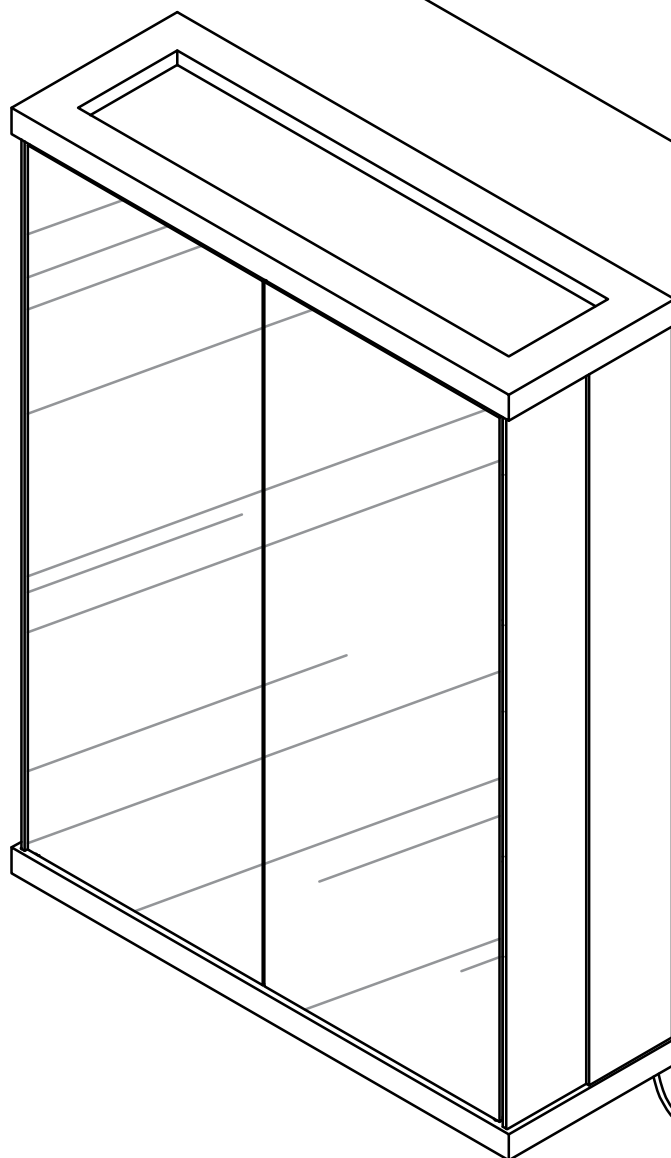

23

User's Guide


Thank you for purchasing this product.

To use this product, please plug it into a 12V DC power supply.

Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller. With 4 touch buttons, it can turn ON/OFF the light and turn ON/OFF the induction function, change light colors, and adjust the light luminance.

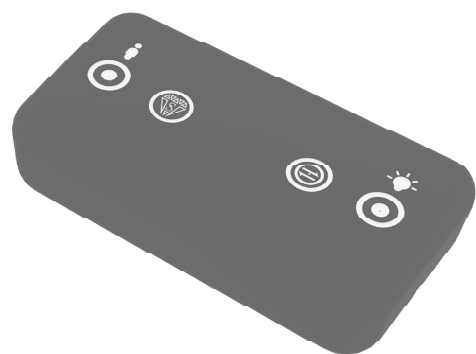

Operation



This touch button is the master switch of the smart box,

which can turn off all functions of the box and control the light strips on/off operation.

The operation that can be turned on and off with just a light tap. Press and hold to adjust the brightness.

Upon first power-up, the default light will be set to white.



This touch button is used to turn on/off the induction function.

A. touch this button once to turn on the induction function (indicator light on).

After the person leaves or remains stationary for more than 30 seconds, the light strip goes out; people and objects within a range of 1 meters move will light up the light strip.

B. Long press this button for 0.5 seconds to turn off the human body induction function (the indicator light goes out).

At this point, Keep the light strip as it was before turning off and no longer be affected by human and object activities.

By default, induction function is enabled when powered on.



This touch button is the Dynamic Phantom Color Mode, which includes 5 magical lighting effects.

Simply tap to cycle through the options. (Attention: This mode cannot adjust the brightness)




This touch button controls the single-color switching function of the light strips,

offering 7 different colors to choose from.

Phantom Color Mode Button

7-Color Mode Button

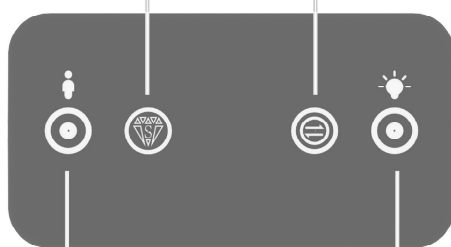

Induction Button

Master Switch Button



ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If you have any questions when installing, please feel free to contact us. Thank you.