

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact: \_\_\_\_\_

# PEWLE SERIES

Wet Location LED Emergency Exit

## Specifications:

### Description:

The PEWLE Series offers quality and value with a wet location rated emergency Exit sign. Housing and face-plate made from impact resistant UV stabilized polycarbonate. Housing is corrosion resistant and face-plate is fully gasketed. Exit face illumination by low energy, long-life red or green ultra bright LED's. The Exit letters measure 6" with a red or green diffuser. Single-face models can be wall mounted by use of molded-in template, end or ceiling mounted. Double-face models are end or ceiling mounted only. Includes canopy and universal mounting plate. Water-proof test switch and AC-on indicator located at Exit bottom. Directional indication made by place-able chevrons. Conduit entry KO's located in top and side housing, with conduit fitting included.

### Features:

- LED life-cycle of more than 10 years
- Dual-voltage 120 or 277V AC input
- Includes long-life 4.8 VDC Nickel Cadmium battery for UL recognized 90 minute emergency lighting
- Wet Location Listed (-20°C to 50°C)
- Provided with test switch and AC-On indicator
- Canopy included
- 24hr. Re-charge

### Application:

The PEWLE Series can be applied in areas that are susceptible to rain or wet conditions like pool areas or water treatment facilities.

### Energy Consumption:

120 VAC	277 VAC
2.7W	2.7W


### Catalog number:

Base	Location	Face	Color	Finish
PE	WLE - Wet Location	S - Single D - Double	R - Red G - Green	30 - White

### Images:



### Dimensions:

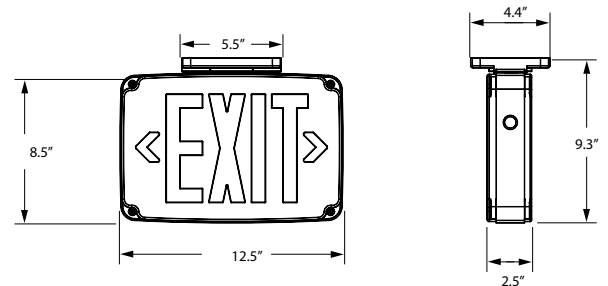

### Warranty:

2 year full unit warranty

### Compliances:

- UL924 Listed for Wet Location
- NFPA 101 and NFPA 70
- OSHA