









Installation

Hardware List		Hardware List	
 Table top	1	 Table leg	1
 Table base	1	 Support frame	1
 8x16mm screw	4	 8x35mm screw	10
 Washer	14	 Nut	4
 Foot pad	6	 spare 4x15mm Self-tapping screws	8
 Hexagonal screw tap	1	 Wrench	1


1



8x35mm screw


Screw the foot pads onto the table base (you can adjust the balance through the foot pads when the ground is uneven)

2

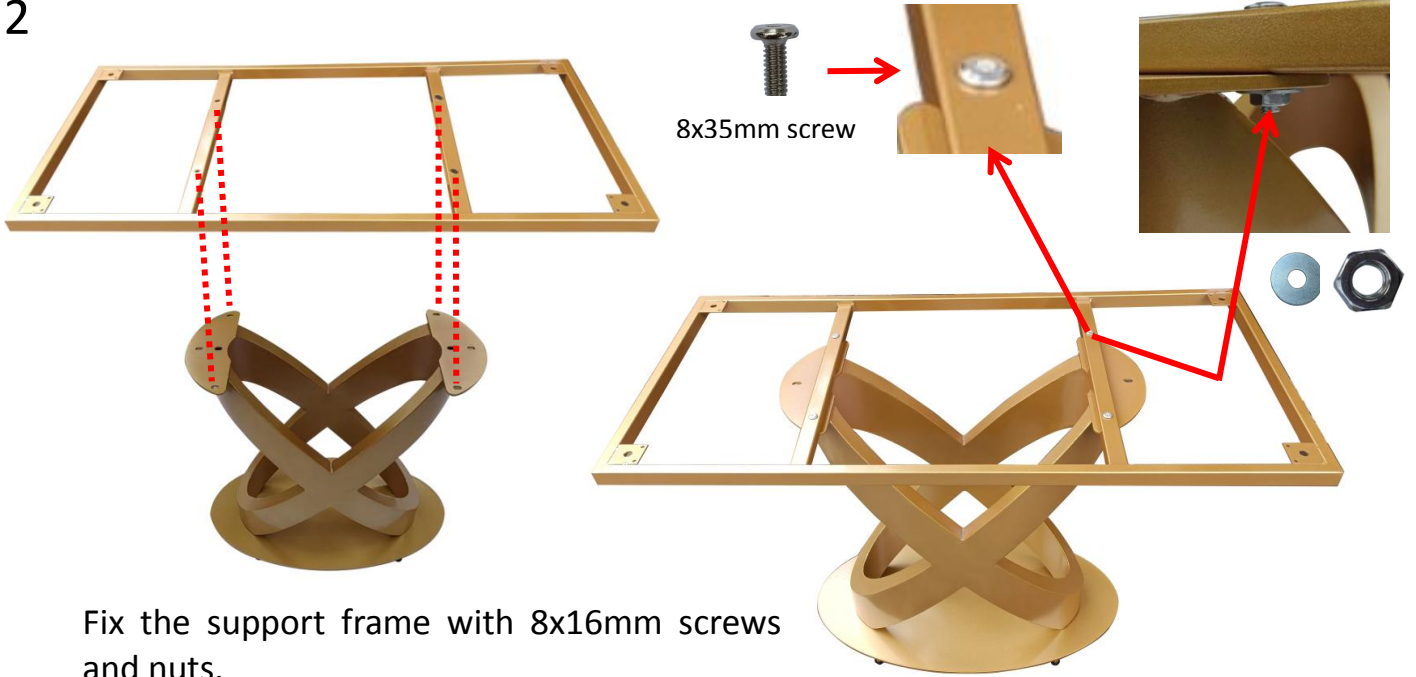

Fix the support frame with 8x16mm screws and nuts.

3

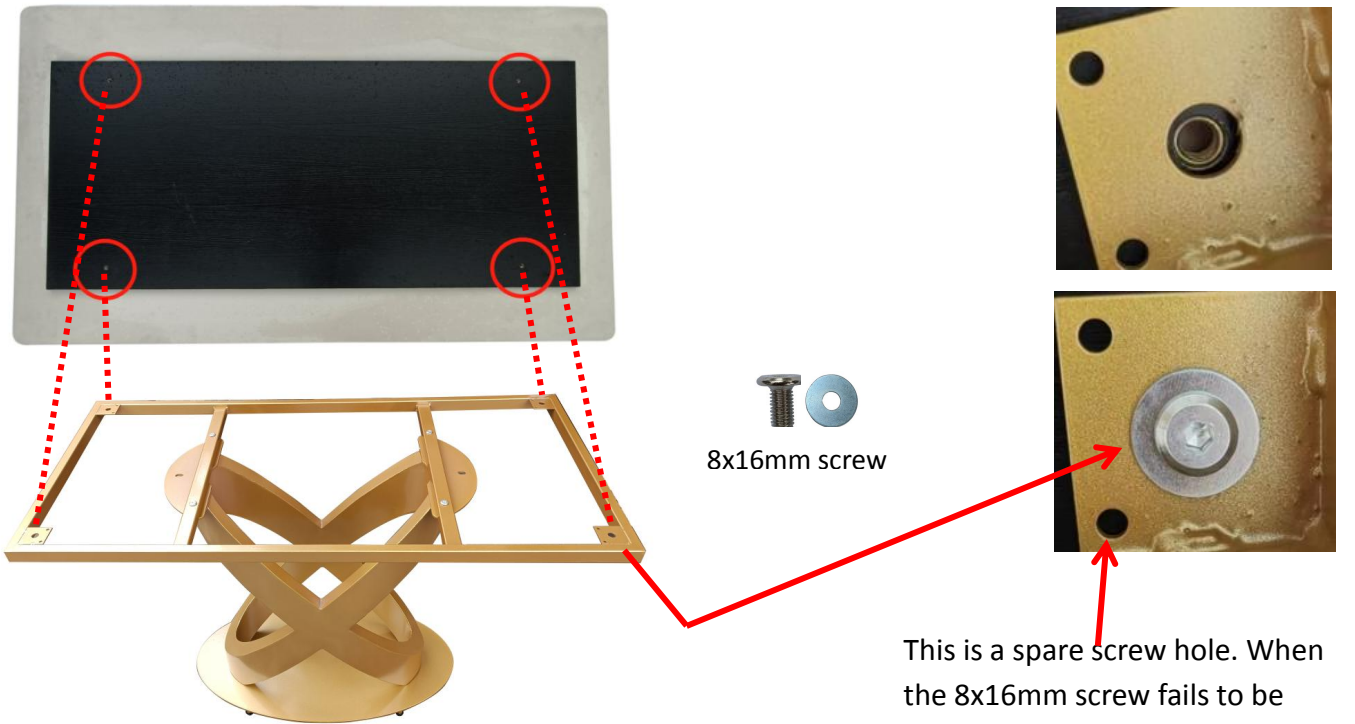

Put the table top on the table leg, make sure the reserved screw holes of the table top and the frame are corresponding, tighten 8x16mm screws to finish the installation.

This is a spare screw hole. When the 8x16mm screw fails to be screwed in, the hole can be fixed with a 4x15mm self-tapping screw. Either way will do.

