



Recessed Hole



Pre-Checked

- Durable log construction.
- Exclusive finish and design
- Patent pending crack resistant design and process

IMPORTANT: READ CAREFULLY BEFORE BEGINNING!

1. Do not tighten bolts until fully assembled.
2. Recessed holes to face outward.
3. Insert bolts with washer and secure with washer and nut.
4. Pre-checked side must always face downward or inward.

- Special heat curing, preserving, finishing Process resists mildew, mold, and stains
- Varnished to preserve finish


BAR ARM CHAIR ASPEN

Parts

Assemble

1


ARM REST



LEIGHT: 21.7" x 2PC

2

DIAGONAL LOG



LEIGHT: 31.5" x 2PC

3


FRONT VERTICAL LOG



LEIGHT: 35.5" x 2PC

4


BACK VERTICAL LOG



LEIGHT: 36.6" x 2PC

5

LOWER SUPPORT LOG



LEIGHT: 22.6" x 2PC


6

SEAT PANEL



x 1PC

7



BACK PANEL

x 1PC

A



N8-12

Φ0.3" x 4.7" x 18PC

B



S04-4

Φ0.165" x 1.6" x 2PC

STEP 1: Assembling the Arm Chair Frame


Take one piece of the following parts with a letter "R" behind each number: 1, 2, 3, 4, 5 ("R" = RIGHT)

Step by step assembly by securing each part: (view diagram of step 1)

1. Part 1 to part 4
2. Part 2 to part 3
3. Part 3 to part 1
4. Part 4 to part 2

Use indicated hardware, directed by diagram.


REPEAT steps 1 through 4 above using parts labeled with a letter "L" (LEFT) after the part number.

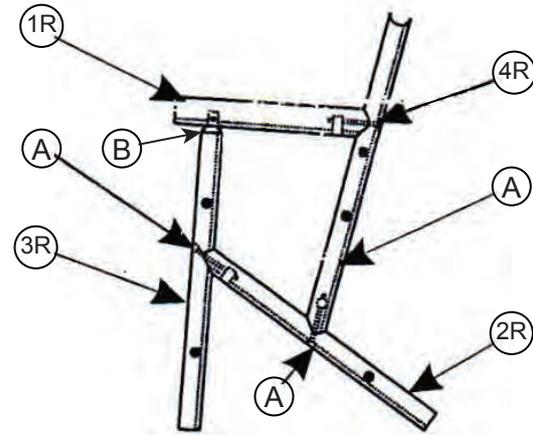

STEP 2: Assembling the Bottom Half

Take assembled SEAT PANEL (6) and one arm frames, keep the arm frame standing and attach the SEAT PANEL (6) to the inside of the arm frame, secure with the indicated nuts and bolts.

REPEAT with the other side of arm frame.

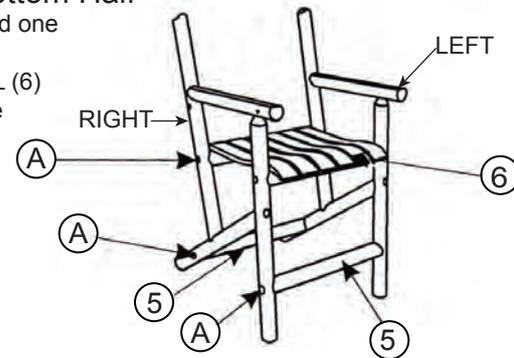


STEP 3: Assembling the Upper Half

Once the seat is assembled to both arm frame, take the assembled BACK PANEL (7) and asseble to the back vertical logs (4) of the arm frame. Secure with indicated hardware in the diagram.

STEP 4: FINISH

Tighten all nuts, bolts, and screws once every part and assembled piece are securely in place.

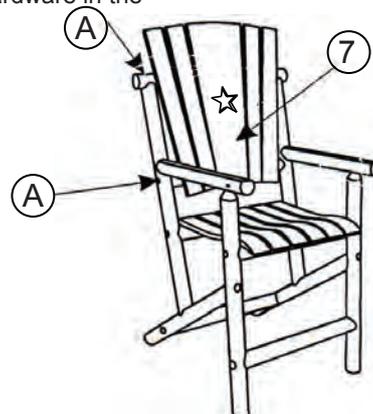

Congratulations on your assembly!

Limited Warranty and Care Instructions

Limited one year Finish Warranty

**** (non-transferable) ****

Replacement of defective or missing parts will be sent at no charge to the customer for a period of 15 days from the date of purchase. Freight, packaging, labor or material charges to and from our customer service center is not covered under the warranty and is therefore the customer's responsibility.

The limited warranty does not cover this piece for commercial purposes, abusive use, damage by modification, freeze damage, rust, fading and issues caused by improper care.

Proper Care Instructions

If left untreated, the wood will naturally weather. To preserve and maintain the original finish, we recommend that a light lacquer coating be applied every 4 to 6 months depending on the seasons. During a long periods of non-use, store furniture in covered and dry place. For the least maintenance, use under covered area.

We recommend a exterior poly-urethane product that features a clear satin or semi-gloss finish and a fast drying process.

Proof of purchase (date register receipt) and photos will be required for warranty claims.

For any questions or claims, please contact customer service.