

**Lavatory Sink, Wall Mounted
Models ELV2219, ELV2219CS,
ELVWO2219 and ELVWO2219CS**

ELKAY®

SPECIFICATIONS

GENERAL

Highest quality sink formed of #18 (1.2mm) gauge, type 304 (18-8) nickel bearing stainless steel.

Design Features

Bowl Depth: 5-1/2" (140mm)

Rim: 5/32" (4mm) raised rims and 2-1/2" (64mm) high backsplash.

Coved Corners: 1-3/4" (44mm) radius vertical and horizontal.

Apron Front: 2-1/2" (64mm) at front and both sides.

Finish: Exposed surfaces are hand blended to a uniform satin lustrous finish.

Underside: Sound dampening pad to dampen sound and reduce condensation.

Other

Drain Opening: 1-5/8" (41mm) rear centered outlet.

Furnished with integral support brackets and separate wall hanger.

FOLLOWING MODELS DO NOT INCLUDE

FAUCET AND FITTING:

(CHECK MODEL SPECIFIED)

See other side for faucet hole locations

- ELV2219
- ELV2219CS
- ELVWO2219 (With connected overflow)
- ELVWO2219CS (With connected overflow)




These sinks are compliant to ADA and ANSI/ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards.

OPTIONAL ACCESSORIES

Faucet: LKB721C

Drains: LK174, LK174LO

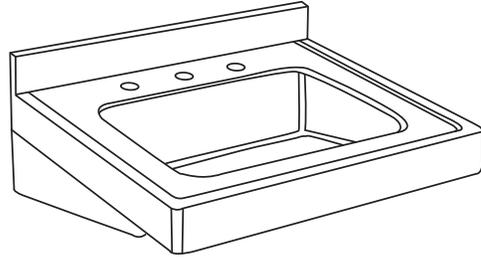

Model ELV22193



SEE OTHER SIDE FOR PRODUCT DIMENSIONS.


In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

SPECIFICATIONS

SINK DIMENSIONS*

Model Number	A	B	C	D	E	F	G	I	J	K
ELV2219	22 (559mm)	19 (483mm)	16 (406mm)	11½ (292mm)	3 (76mm)	4½ (114mm)	3½ (89mm)	4¼ (125mm)	2½ (64mm)	5 (127mm)
ELVWO2219	22 (559mm)	19 (483mm)	16 (406mm)	11½ (292mm)	3 (76mm)	4½ (114mm)	3½ (89mm)	4¼ (125mm)	2½ (64mm)	5 (127mm)

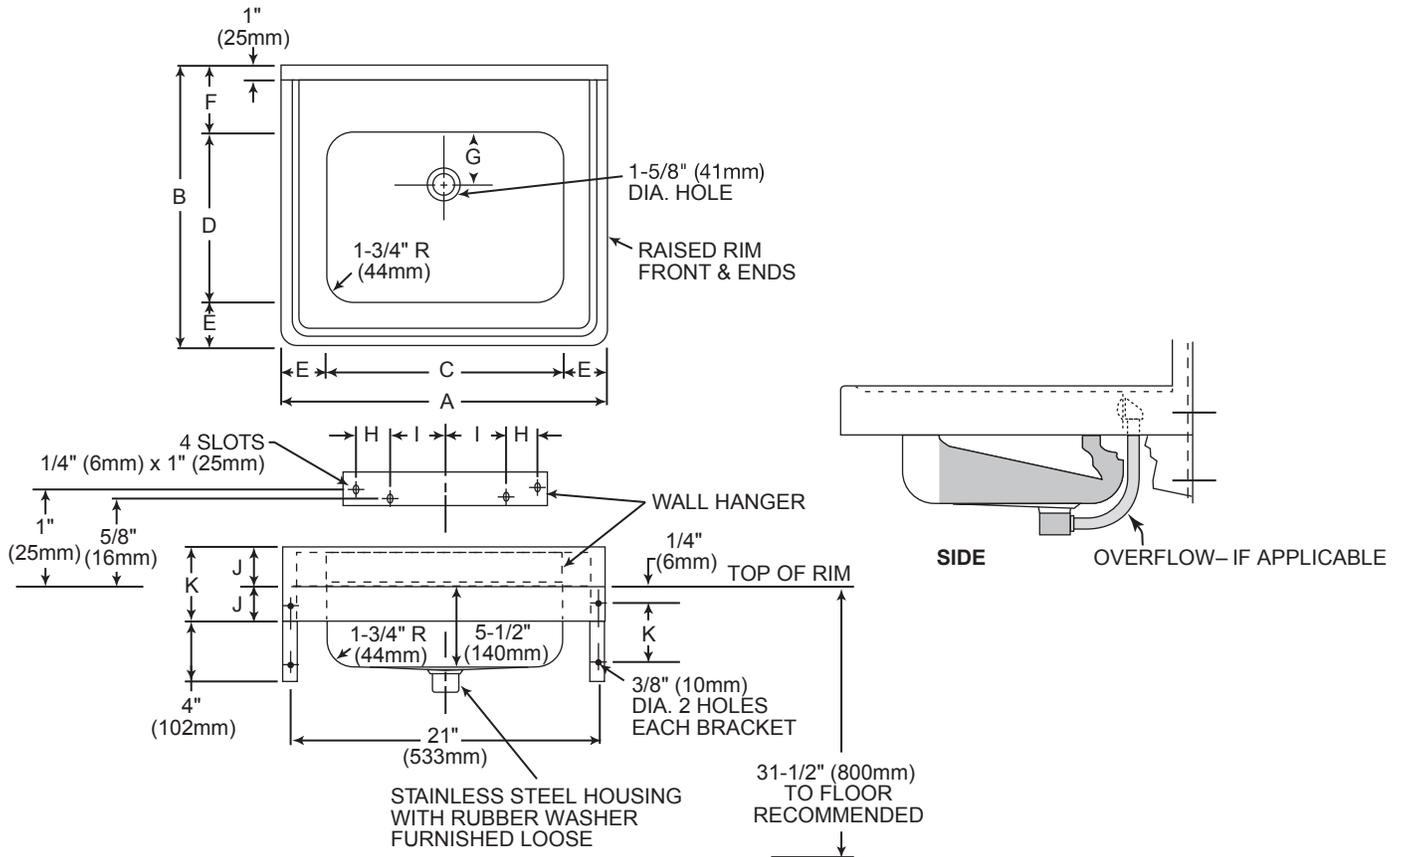

HOLE DRILLING CONFIGURATIONS

