



INSTRUCTION MANUAL

♥Thank you for choosing♥

NOTICE:

IMPORTANT, KEEP FOR FUTURE REFERENCE PLEASE READ CAREFULLY.

IF YOU HAVE ANY CONCERNS ABOUT THE PRODUCT, PLEASE FEEL FREE TO CONTACT US BEFORE YOU LEAVE A REVIEW.


CAUTION:

1. The installation requests a professional electrician to operate. Please make sure the installation environment ventilating and dry.
2. Wearing gloves during installation to prevent yourself from scratching by the fixtures. or electric wire. Be sure the power has been turned off before operation.
3. Make sure the fixture is away from corrosive chemicals and air such as acid and alkali. Clean the fixture by wiping it with a dry rag.
4. Do not touch the bulb when the fixture is turned on or look directly at the lit bulb. Keep flammable materials away from the lit bulb.
5. To reduce the risk of fire, electrical shock, and personal injury, always turn off and unplug the fixture and allow it to cool before replacing the light bulb.

STEP-BY-STEP INSTALLATION (Reference assembly drawing)

1. Shut off the power at the circuit breaker and remove the existing fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts in a clear area, Be careful not to lose any small parts necessary for installation.
3. Remove the mounting screw from the light fixture.
4. Connect the hanging chain to reach the height you want.(refer to Fig 1) Screw the hanging chain into the top plate and the lamp body
5. Secure bracket to the junction box using junction box screw.
6. Connect the wire (N) from the light fixture to the supply wire (N)
Connect the wire (L) from the light fixture to the supply wire (L)
7. After wires are connected, tuck them carefully inside the junction box.
8. Mount the canopy onto the bracket and secure it with four decorative nuts.
9. Connect the assembly lamp head to the lower end of the lamp body lamp and tighten the nut knob to connect the wire (N) to the assembly lamp head wire (N) and connect the wire (L) from the lamp body lamp to the assembly lamp head wire (L)(Reference assembly drawing)
10. To finish the structure of the lamp body, it need to fix the metal tube on the metal ring with screws. (refer to Fig 3)
11. Add the **E12 (US) / E14 (EU)** bulbs, and turn on the power, check whether the light fixture works normally or not.
12. Ensure the light fixture work normally, Hang the crystal on the lamp body. (refer to Fig 2)

INSTALLATION INSTRUCTION

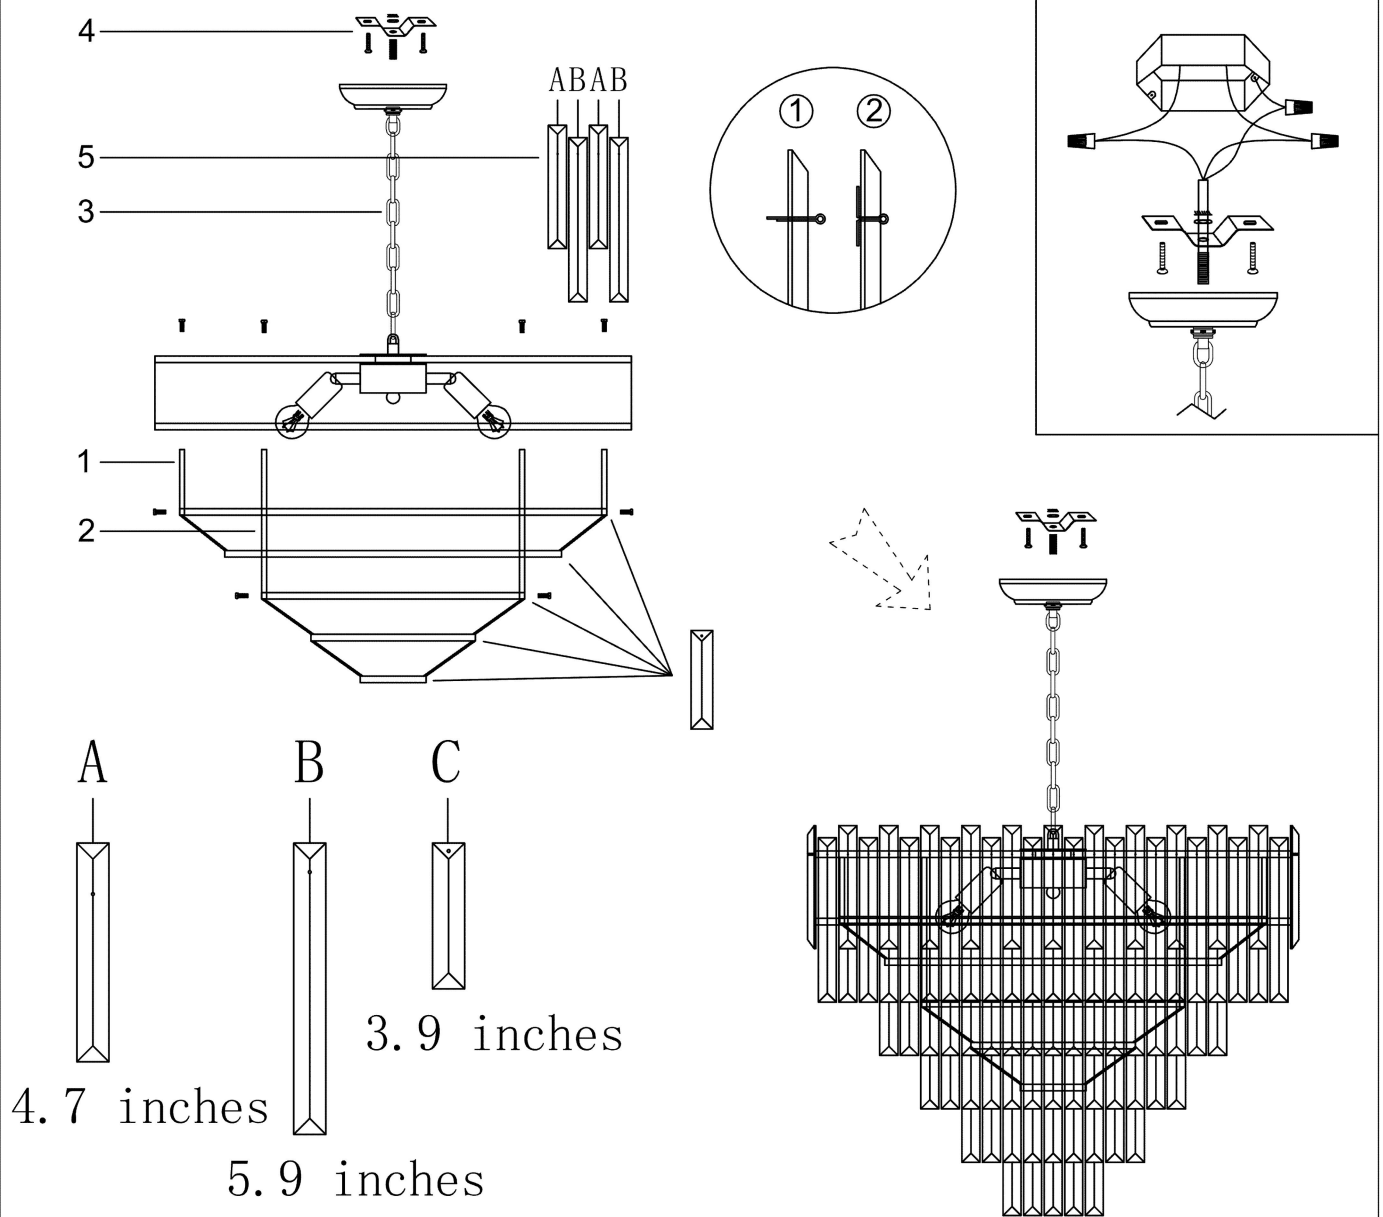

INSTALLATION STEPS:

1. Make sure to turn off the electricity before installation.
2. Take out the fitting from the packaging.
3. Fix the mounting bracket to ceiling;
4. Mounting from inside to outside (1 - 5)
5. Connect the wire(from the lighting) to the wire (from the ceiling);
6. Turn on the electricity for testing.

* installed by qualified electrician*

Package List:

Lamp body	1	PCS
Φ 19.4 inch (495mm) Metal ring	1	PCS
Φ 9 inch (229mm) Metal ring	1	PCS
3.9inch (100mm) Metal tube	4	PCS
7.8inch (200mm) Metal tube	4	PCS
Chain	1	PCS
A Crystal	37	PCS
A Spare crystal	4	PCS
B Crystal	37	PCS
B Spare crystal	4	PCS
C Crystal	136	PCS
C Spare crystal	14	PCS
Screw pack	1	BAG
Mounting bracket	1	PCS

※**The package include extra crystal pieces.** Spare Accessory:

This product requires **37 A crystals, 37 B crystals, and 136 C crystals.**

To ensure smooth installation, the package includes **41 A crystals, 41 B crystals, and 150 C crystals.**

If you find that the number of **A crystals or B crystals is less than 37, or the number of C crystals is less than 136**, please contact us immediately. We will provide prompt after-sales support and assistance.

This product compatible with **E12 (US) / E14 (EU)** bulbs (Not included in the package).