

INSTALLATION INSTRUCTIONS



Three in one screw



Lock catch



White foot nails



Double headed screw



Corner connector



Straight connector



Self-tapping screw



Flat head screw



Drawer lock



doorknob




Wire hole box




Buffer hinge




Silent drawer slides

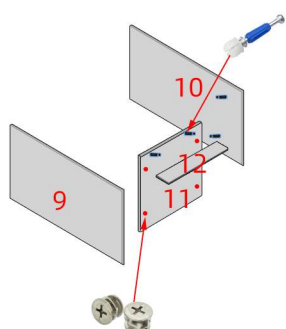


1. Put three-in-one screws on boards 9,10 and 11 to assemble the lower cabinet and tighten the lock




2. Put the three-in-one screw under the Cabinet Top Plate 13, cover the cabinet and tighten the lock

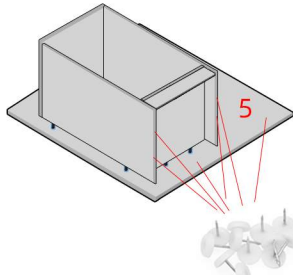


3. Put a three-in-one screw on the small backboard 5, assemble the lower cabinet on the small backboard, tighten the lock and nail the foot nail on the bottom

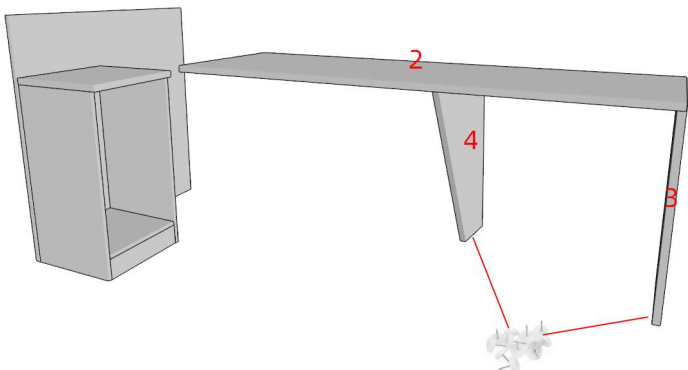


4. Straighten the cabinet body, put some three-in-one screw under Tabletop 2, nail the foot nails at the bottom of Middle Foot 4 and side Foot 3, then assemble tabletop 2, middle foot 4 and side foot 3 onto the cabinet body, tighten the lock

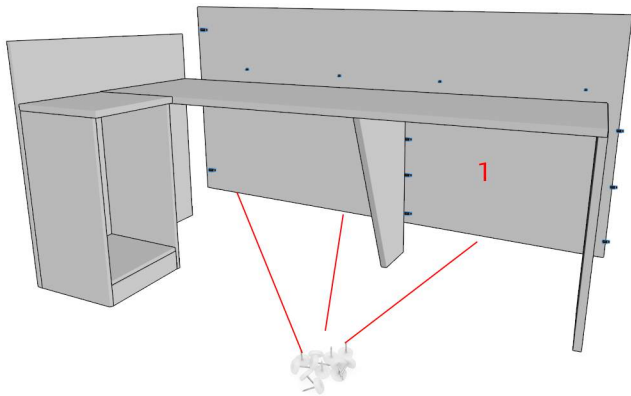

5. Nail the foot nail on the bottom of the big back plate 1, hit the three-in-one screw, align the hole position, assemble it on the front desk and tighten the lock

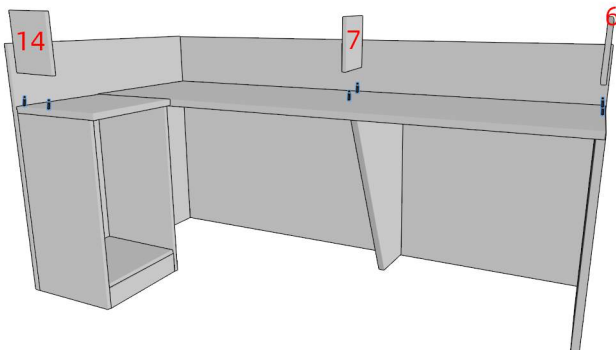


6.Put three-in-one screw on panels 2 and 13, assemble three small vertical panels 6,7 and 14 on the table top, and tighten the lock

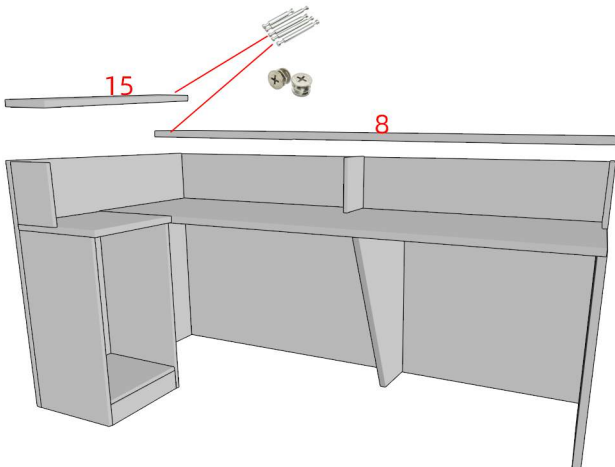


7, in the Big Top 8 and small top 15 make some three-in-one, then cover the front desk, tighten the lock, small top 8 and Big Top 15 with a double-headed screw link


Lifting and pumping the outer frame

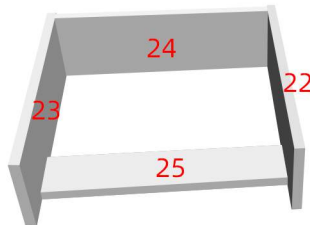


8. Lifting and pumping installation: first, the left 23 and the right 22 of the lifting on the guide rail rail and play a three-in-one screw, the board 22,23,24,25 assembled together, tighten the lock

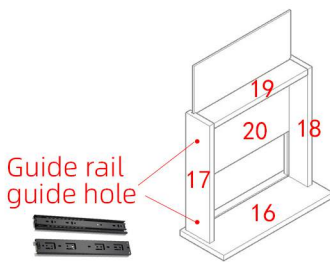


9, drawer installation: In the surface 16 and side 17,18 play a three-in-one screw, then in accordance with the order, the board 17,19, 18,20,16 assembled together, tighten the lock; Install the inner rails of the guide rails on the boards 17 and 18, and install the other drawer in the same way

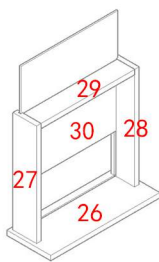

Guide rail guide hole



10. Install the keyboard tray, first install the guideway on the left side of the keyboard 32, the right side of the keyboard 31 and the bottom of the keyboard 34; then type the three-in-one screw on the left side of the keyboard 32 and the right side of the keyboard 31, and assemble the side plate and the tail plate together, tighten the lock

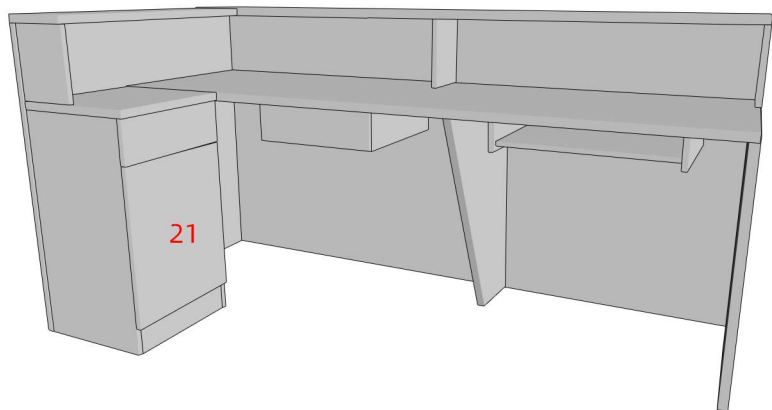

Door Hinge adjustment: this screw can adjust the front and back gap between the door plate and the cabinet

Door Hinge adjustment: this screw can adjust the left and right gap between door plate and cabinet

11, under the desktop 2 hit a three-in-one screw, the keyboard tray and drawer outside the frame at the desktop 2 three-in-one screw, assembled under the desktop 2, tighten the lock; Then assemble the keyboard bottom 34 and the drawers to the front desk, install the lower cabinet drawer to the lower cabinet, and install the cabinet door on the lower cabinet with the door hinge