Product introduce

（Ⅰ）Instructions:

1.After you open the product package, please check the physical objects and the corresponding illustrated accessories;

2.The product shape shall be subject to the physical object, and the schematic diagram is for reference only;

3.Under the condition of not affecting the use, the accessories are subject to change without prior notice;

4.Thank you for choosing our products.

(Ⅱ）The product list is as follows: Please refer to the right picture

09	hook up	1	ABS	included with the product
08	gradienter	1	ABS	included with the product
07	accessories bag	1	SUS	included with the product
06	1.5m flexible hose	1	SUS	Customer selection
05	handheld shower	1	ABS	Customer selection
04	showerhead	1	ABS	Customer selection
03	shower slide component	1	Al + Cu	
02	glass cover	1	glass	
01	faucet body	1	Al + Cu	
No.	Name	quantity	material	Mark

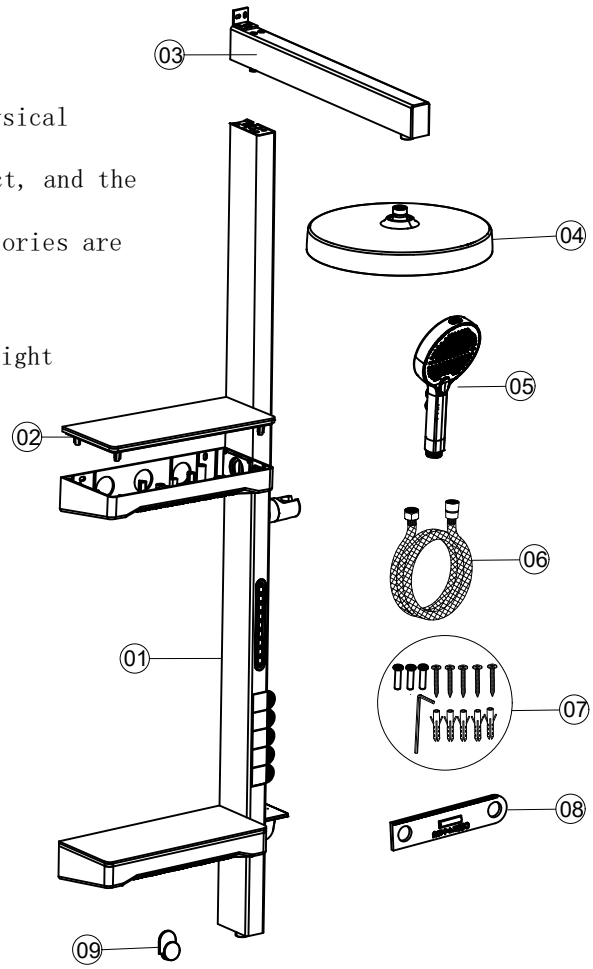

installation matters

(I) Important note

1.1 Dynamic pressure: Under 0.1±0.01Mpa water pressure, basin, washing and kitchen water nozzle (with accessories), flow ≤0.15L/S

1.2 Dynamic pressure :0.3+0.02Mpa water pressure, bath ≥0.33L/S; Basin, bidet, sink, shower >0.20L/S

2. Water inlet temperature the recommended temperature is 4° to 80°

(II) Cautions

1.The faucet heart of the main group,factory has been tested and debugged, please do not disassemble by yourself.

2.Before installing the faucet, be sure to remove impurities and sludge from the embedded pipe.

3.After installation, please check whether the connections are tightly connected and whether the pipes leak.

4.The left side of the pipe installation is hot water, and the right side is cold water. Do not reverse the installation.



Do not disassemble



flushing pipes


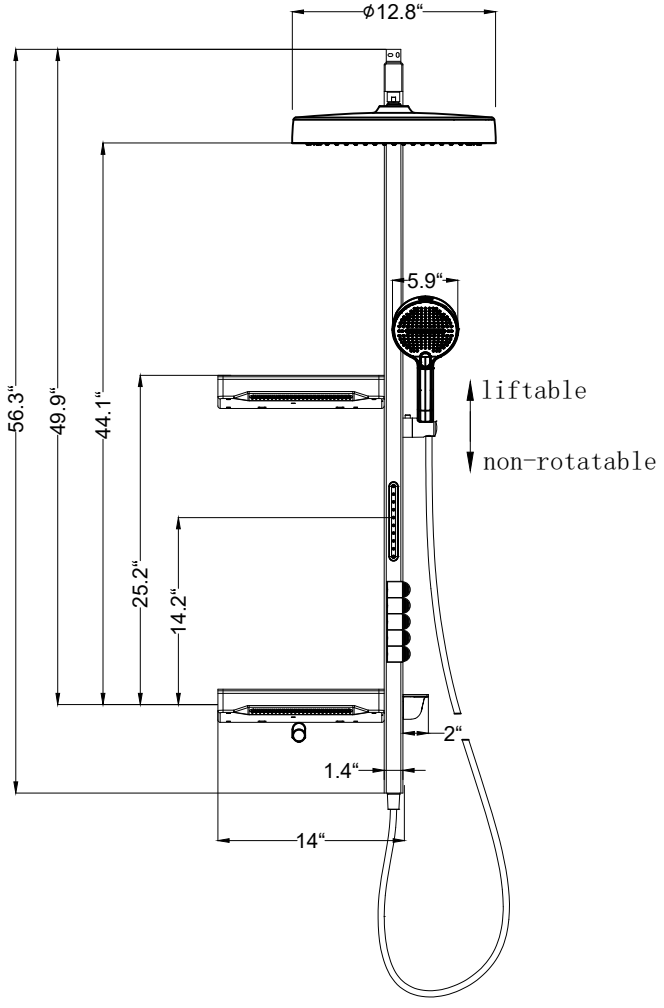
Pipe inspection