

# 24" C-SERIES WINE RESERVE

Perlick®

HC24WB-3 24" INDOOR MODEL



Glass Door Model



Solid Door Model

## GENERAL C-SERIES FEATURES



- **Industry Exclusive** front-vented RAPIDcool forced-air refrigeration system provides best-in-class cooling performance
- Commercial-grade stainless steel interior and black vinyl clad exterior
- All models available with stainless steel or panel ready door. Panel ready doors come ready to accept customer-supplied overlay and handle
- Zero-clearance hinging allows for abutment with surrounding cabinetry
- **Industry Exclusive** full extension wine shelves provide easy access for stocking and retrieving product. Shelves glide smoothly in and out of cabinet on stainless steel ball bearing glides
- Interior lighting and digital control
- Low E, double pane UV-resistant glass provides exceptional insulation and protection from light
- Comprehensive Full Three Year Warranty plus additional three years on sealed system

## HC24WB FEATURES

- Available with stainless steel solid door, panel ready solid door, stainless steel glass door or panel ready glass door
- Includes five (5) full-extension wine shelves to accommodate 40 wine bottles (based on 750 ml., 3" diameter bottles)
- Wine shelves feature stainless steel fronts
- Shelves are removable and adjustable to accommodate oversized/magnum bottles
- Cabinet construction eliminates vibration transfer to reserve
- Wine Reserve temperature 45°- 65°F

## ACCESSORIES

(L)	Factory Installed Lock
66736	Caster Kit for HP24/HC24/HA24 models
67115-24	Wood Faces for Wine Shelf (7/pk)

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit [perlick.com/residential](http://perlick.com/residential)

FORM NO. Z2529  
REV. A-09/07/2018

## PRODUCT SPECIFICATIONS

Product Width	23-7/8" (606 mm.)
Product Height	34-1/4" (870 mm.)
Product Depth	24" (610 mm.)
Opening Width	24" (610 mm.)
Opening Height	34-1/2" (876 mm.)
Opening Depth**	24-7/8" (632 mm.)
Refrigerated Volume	5.2 cu. ft.
Door Swing Clearance	25" (635 mm.) minimum
Electrical	115V, 60Hz., 1 Phase, 2.3 amps
Compressor	525 BTU, standard
Plumbing	None Required
Annual Energy Usage	N/A
Shipping Weight	195 lbs (88.45 kg.)


\*\* Includes 7/8" plug clearance. To achieve 24" depth, you must recess the plug into the wall directly behind the unit.

## INDOOR MODELS

HC24WB-3-1L*	Stainless steel solid door, hinge left
HC24WB-3-2L*†	Panel ready solid door, hinge left
HC24WB-3-3L*	Stainless steel glass door, hinge left
HC24WB-3-4L*†	Panel ready glass door, hinge left

\* Also available hinge right (R)

† This unit comes ready to accept customer-provided overlay panel and handle

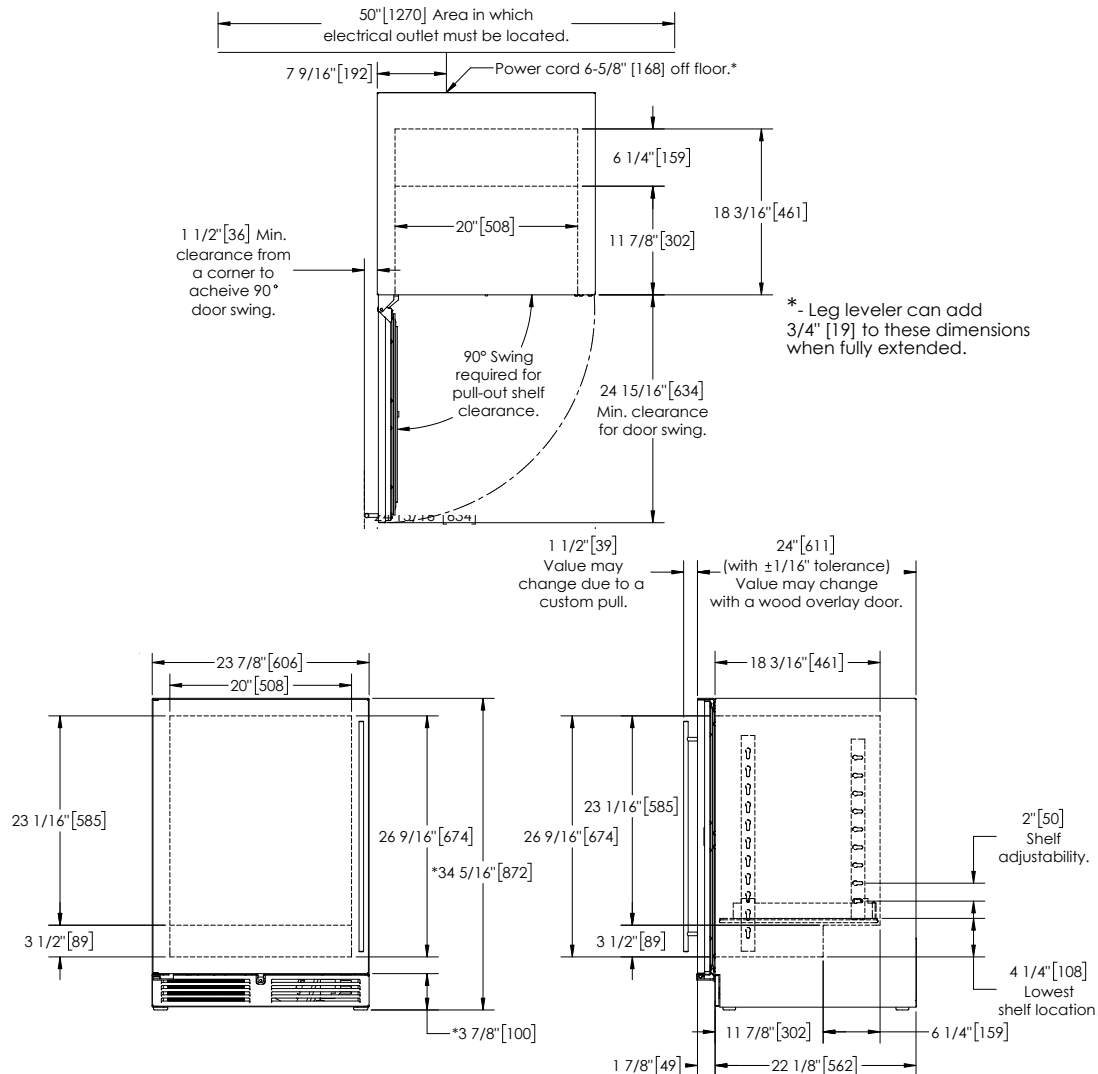

California Prop 65 Notice:

**WARNING:** The materials used in this product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

FORM NO. Z2529  
REV. A-09/07/2018