
# **BAR CART**


#### ASSEMBLY MANUAL

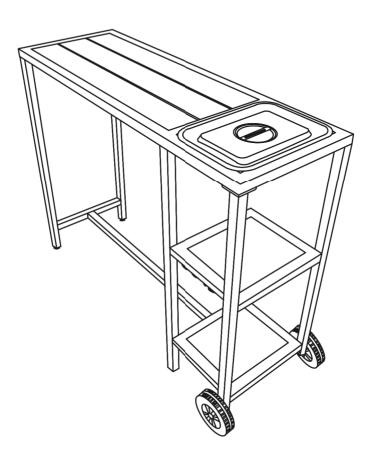



## Dear Customer,


Thank you for choosing our product. Please read this manual carefully before assembling or using this product. If there are parts missing, please kindly send us messages to let us know the name of missing part regarding to the Part List parts list of instructions. We will send replacement to you asap.


# **PART LIST**













































#### NOTE:

During steps 1 to 5, don't tighten the screws completely while assembling, 70-80% tightness is enough.


Then, in step 6, tighten the screws completely after all the holes are aligned.

### **TOOLS REQUIRED**




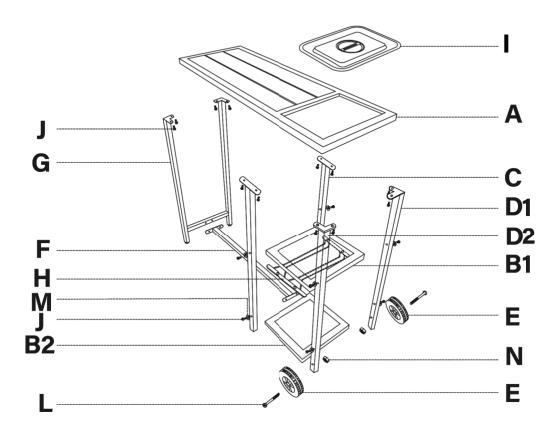


Two PART C mounted to PART A, secured with J-screws (2 J-screws are required for each leg).

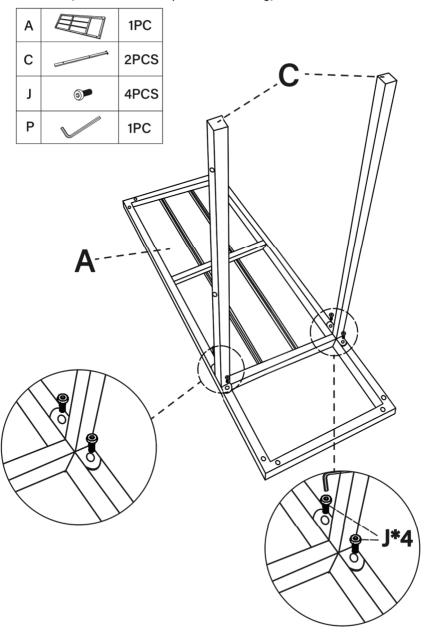

STEP 2 PART D1 is first mounted to PART A, secured with J-screws (2 J-screws are required for the leg). PART D2 is then mounted to PART A, secured with J-screws (2 J-screws are required for the leg).

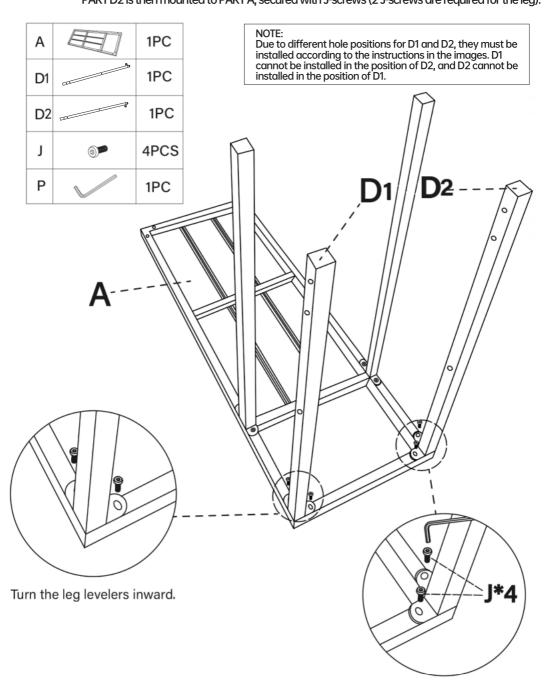


STEP 3 PART H holes aligned with B1 holes, mounted in with 4 J-screws.

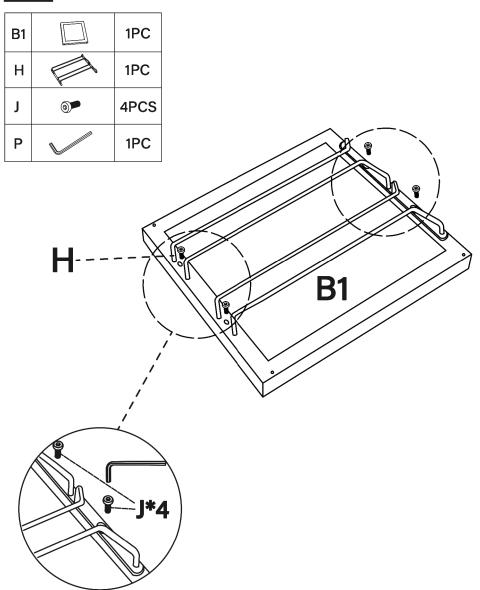


STEP 4

Mount PART B1 and B2 to PART C and D, and secure them with 8 K-screws and 8 M-gaskets.

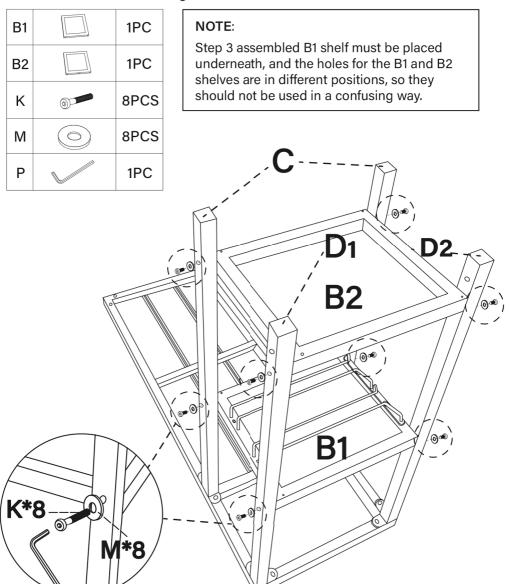




PART G aligned vertically with the other side of the hole in PART A, mounted in with 4 J-screws.

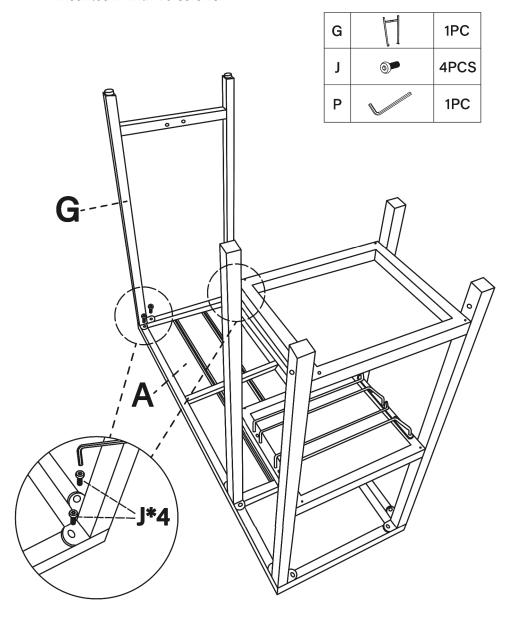

STEP 6

PART F aligned horizontally to holes on both sides in PART B2/G, mounted in with 4 J-screws.

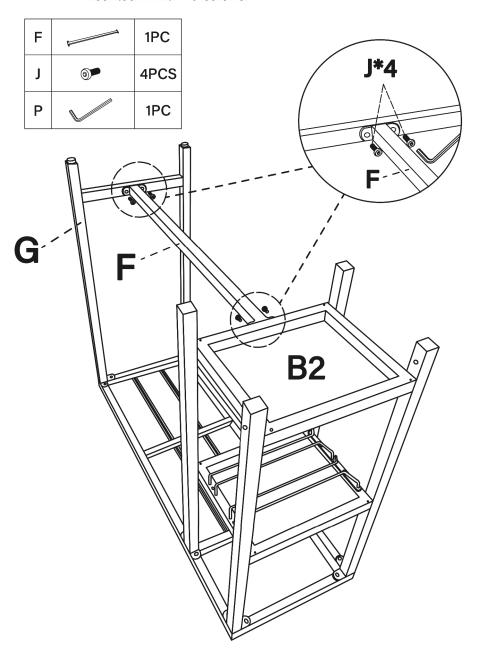

STEP 7

The wheels are aligned with the outer PART D and mounted with 2 L-screws and 2 N-nuts.

