



INSTALLATION GUIDE

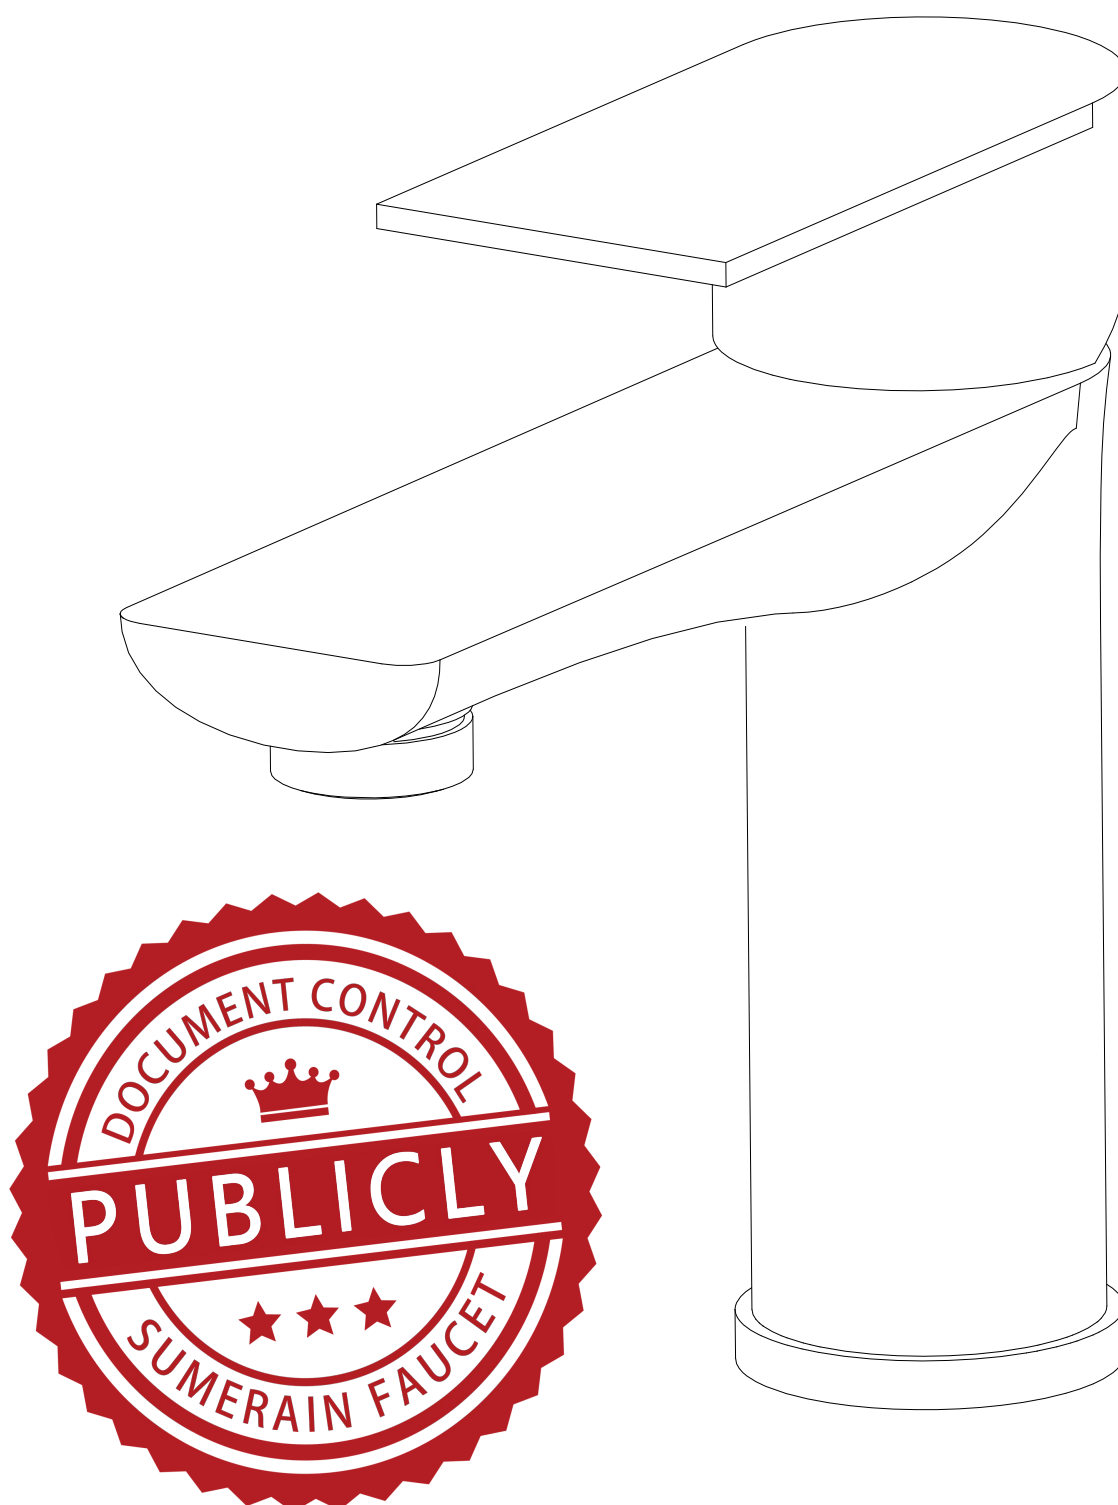


Single Hole Bathroom Sink Faucet

CUSTOMER CARE LINE: +1-866-203-0866


TOOLS RECOMMENDED



Philips screwdriver




Allen wrench

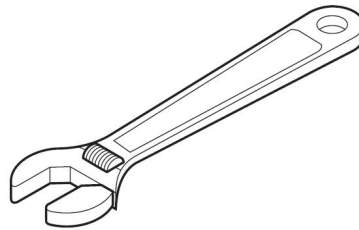

Adjustable wrench



Channel locks



Teflon tape

INSTALLATION STEPS

1. BEFORE PROCEEDING



WARNING: Before proceeding with any operation, please read all instructions thoroughly. If you are uncertain about installing this product, please consult a professional! This product should be installed in accordance with all local and state plumbing and building codes. It is recommended to seek professional assistance.

2. SHUT OFF WATER SUPPLY

Locate the water supply inlets and shut off the corresponding water supply valves, typically found near the water meter. If replacing an existing unit, remove the old unit and thoroughly clean the mounting surface.


3. CHECK THE COMPONENTS OF THE BOX

Upon opening the box, verify that all the listed components are included.

4. INSTALLATION HOLES INSPECTION


Please verify the installation hole size is accurate, with a recommended mounting hole diameter of A and a Maximum deck mount thickness of B.

Code	Dimensions - Inch	Dimensions - mm
A	Ø1-1/4"~Ø1-3/8"	32~35
B	1-9/16"	40

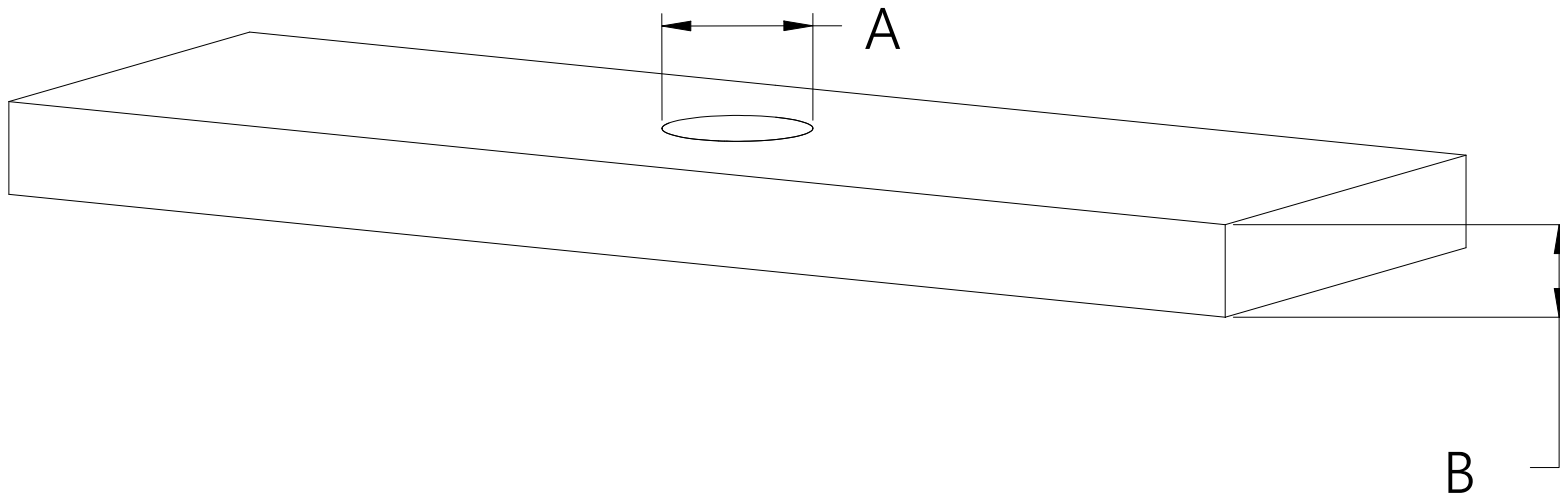


5. INSTALLATION

5.1 Before commencing the faucet installation, please ensure to open the shut-off valve to purge the hot and cold water supply lines. Let the water run for approximately 3 to 5 minutes to completely clear any potential dirt and debris within the pipes. Once this process is complete, remember to shut off the water supply once again.

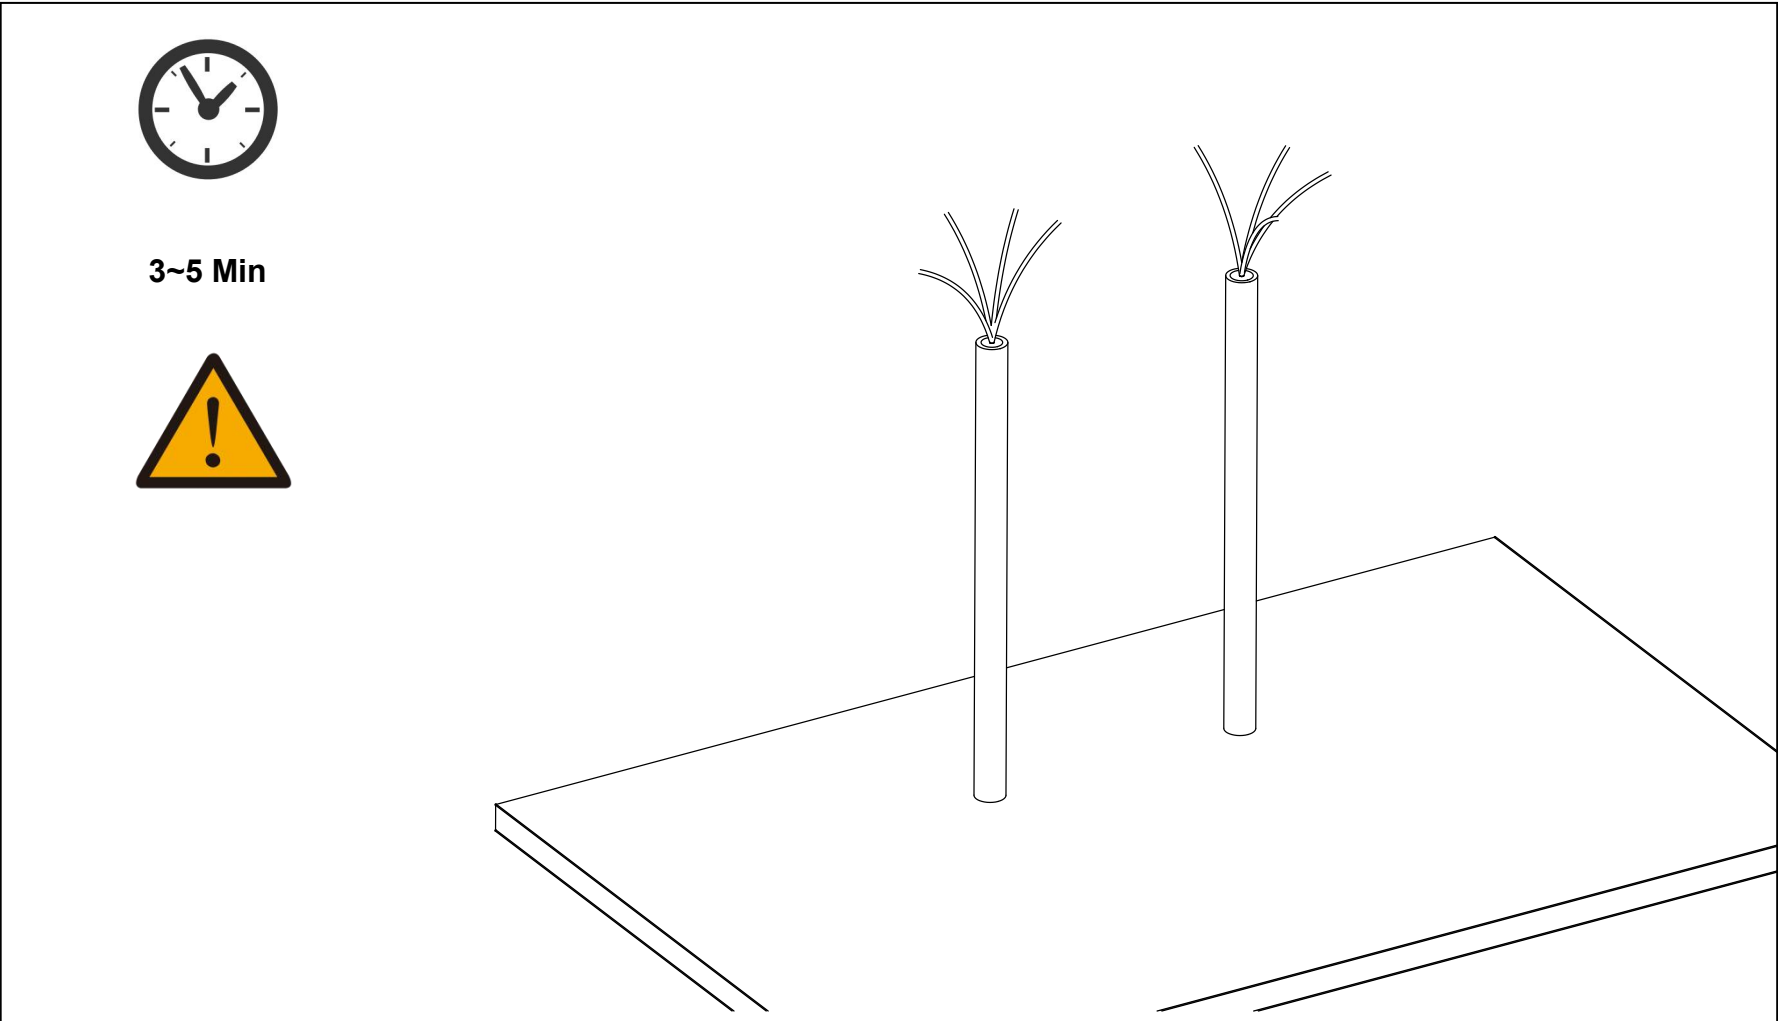


5.2 Disassemble the mounting components from the faucet's mounting shank.

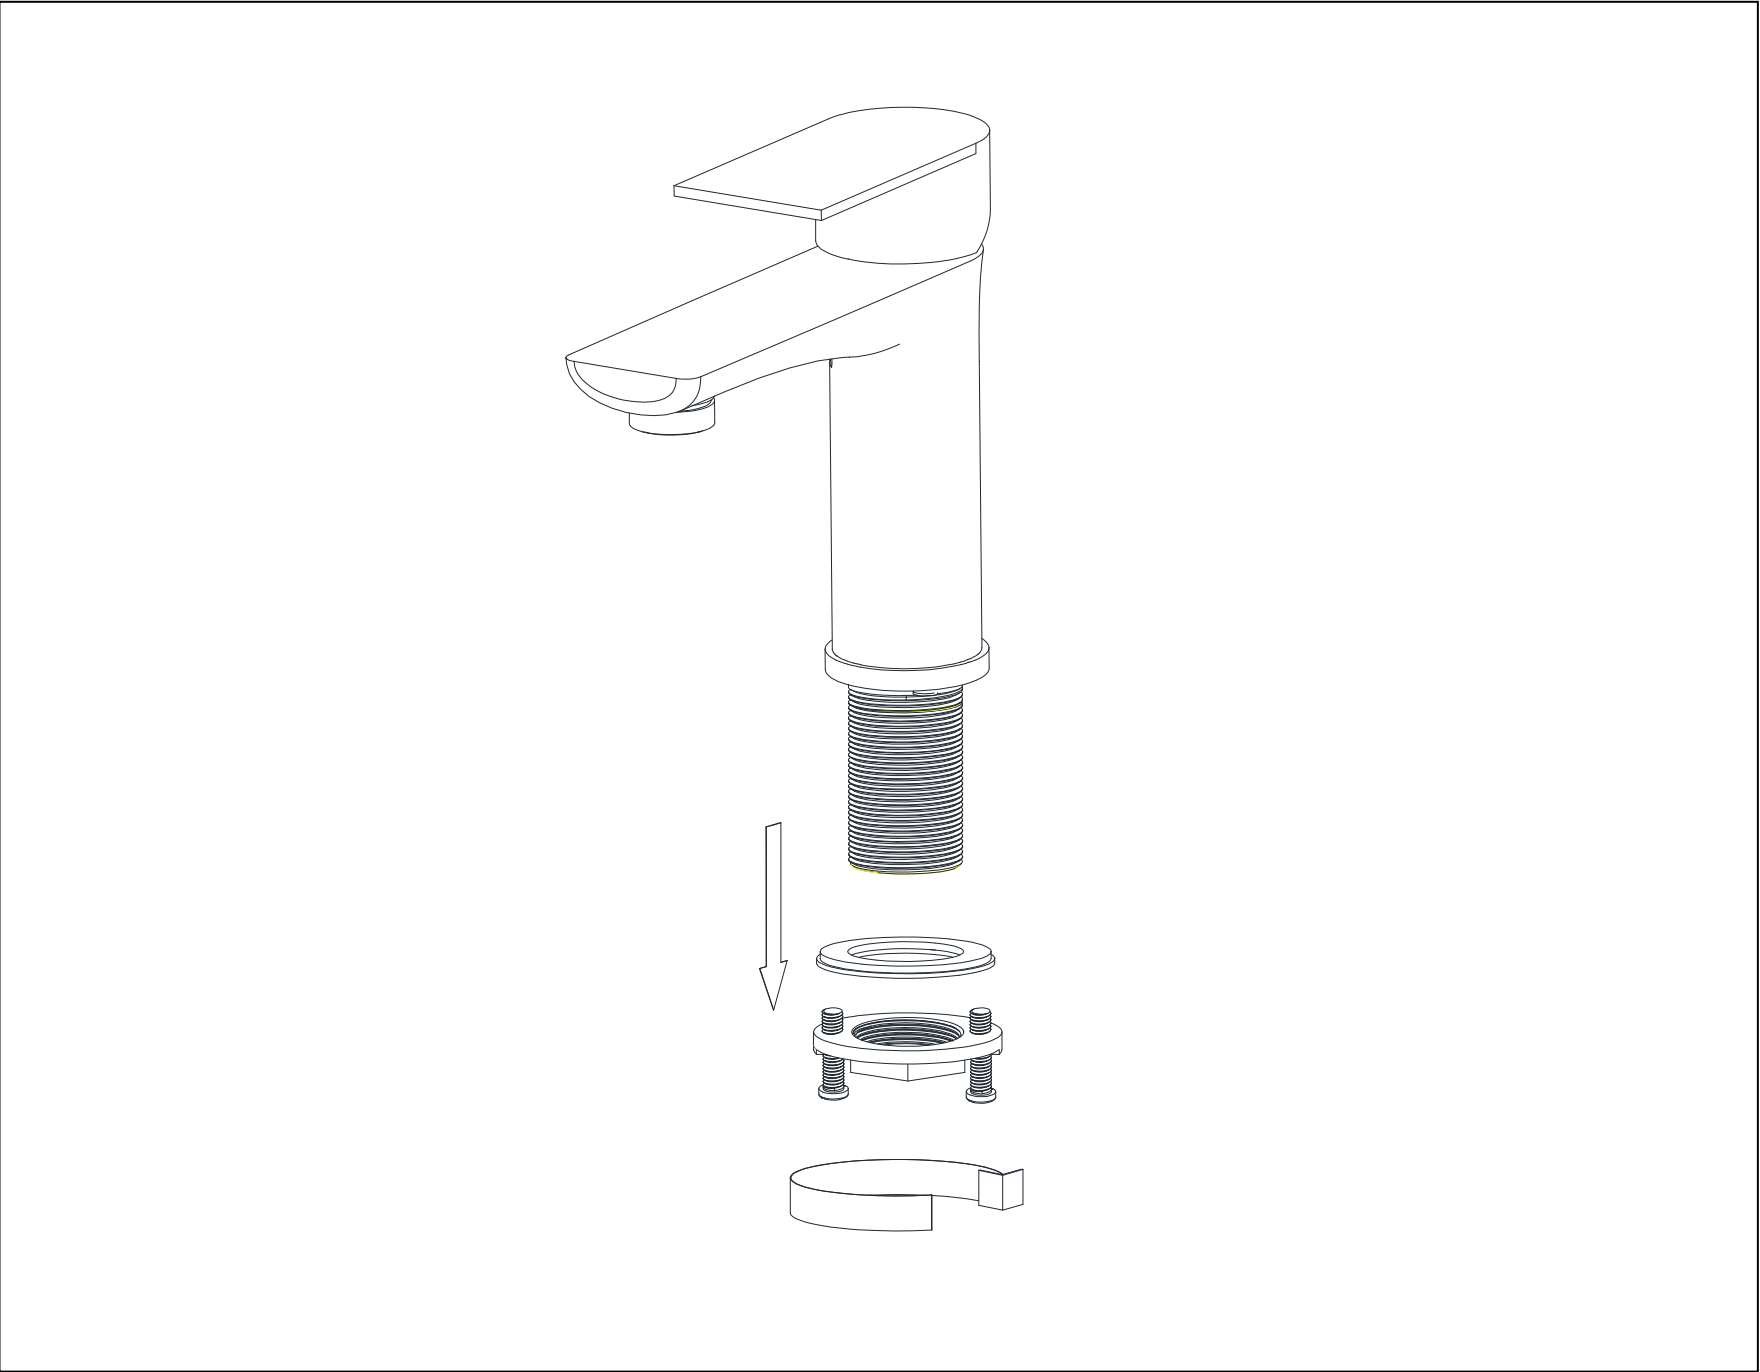


5.3 Connect the provided hot and cold water supply hoses to the threaded connectors at the base of the faucet, ensuring the hot water hose is on the left and the cold water hose is on the right. Hand-tighten the two supply hoses initially, then use a wrench for further tightening. Exercise caution to avoid over-tightening, as this could risk loosening or cracking the threaded connectors.


Code	Dimensions - Inch	Dimensions - mm
C	Ø1-1/4"	32

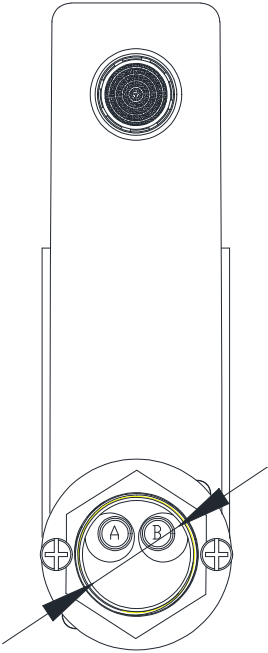


A technical drawing of a faucet base connector, labeled 'C'. It shows a vertical rectangular body with a circular threaded port at the top. At the bottom, there is a circular flange with two ports labeled 'A' and 'B'. Port 'A' is on the left and port 'B' is on the right. Arrows point to these ports with the text: "A":hole for hot water in and "B":hole for cold water in.

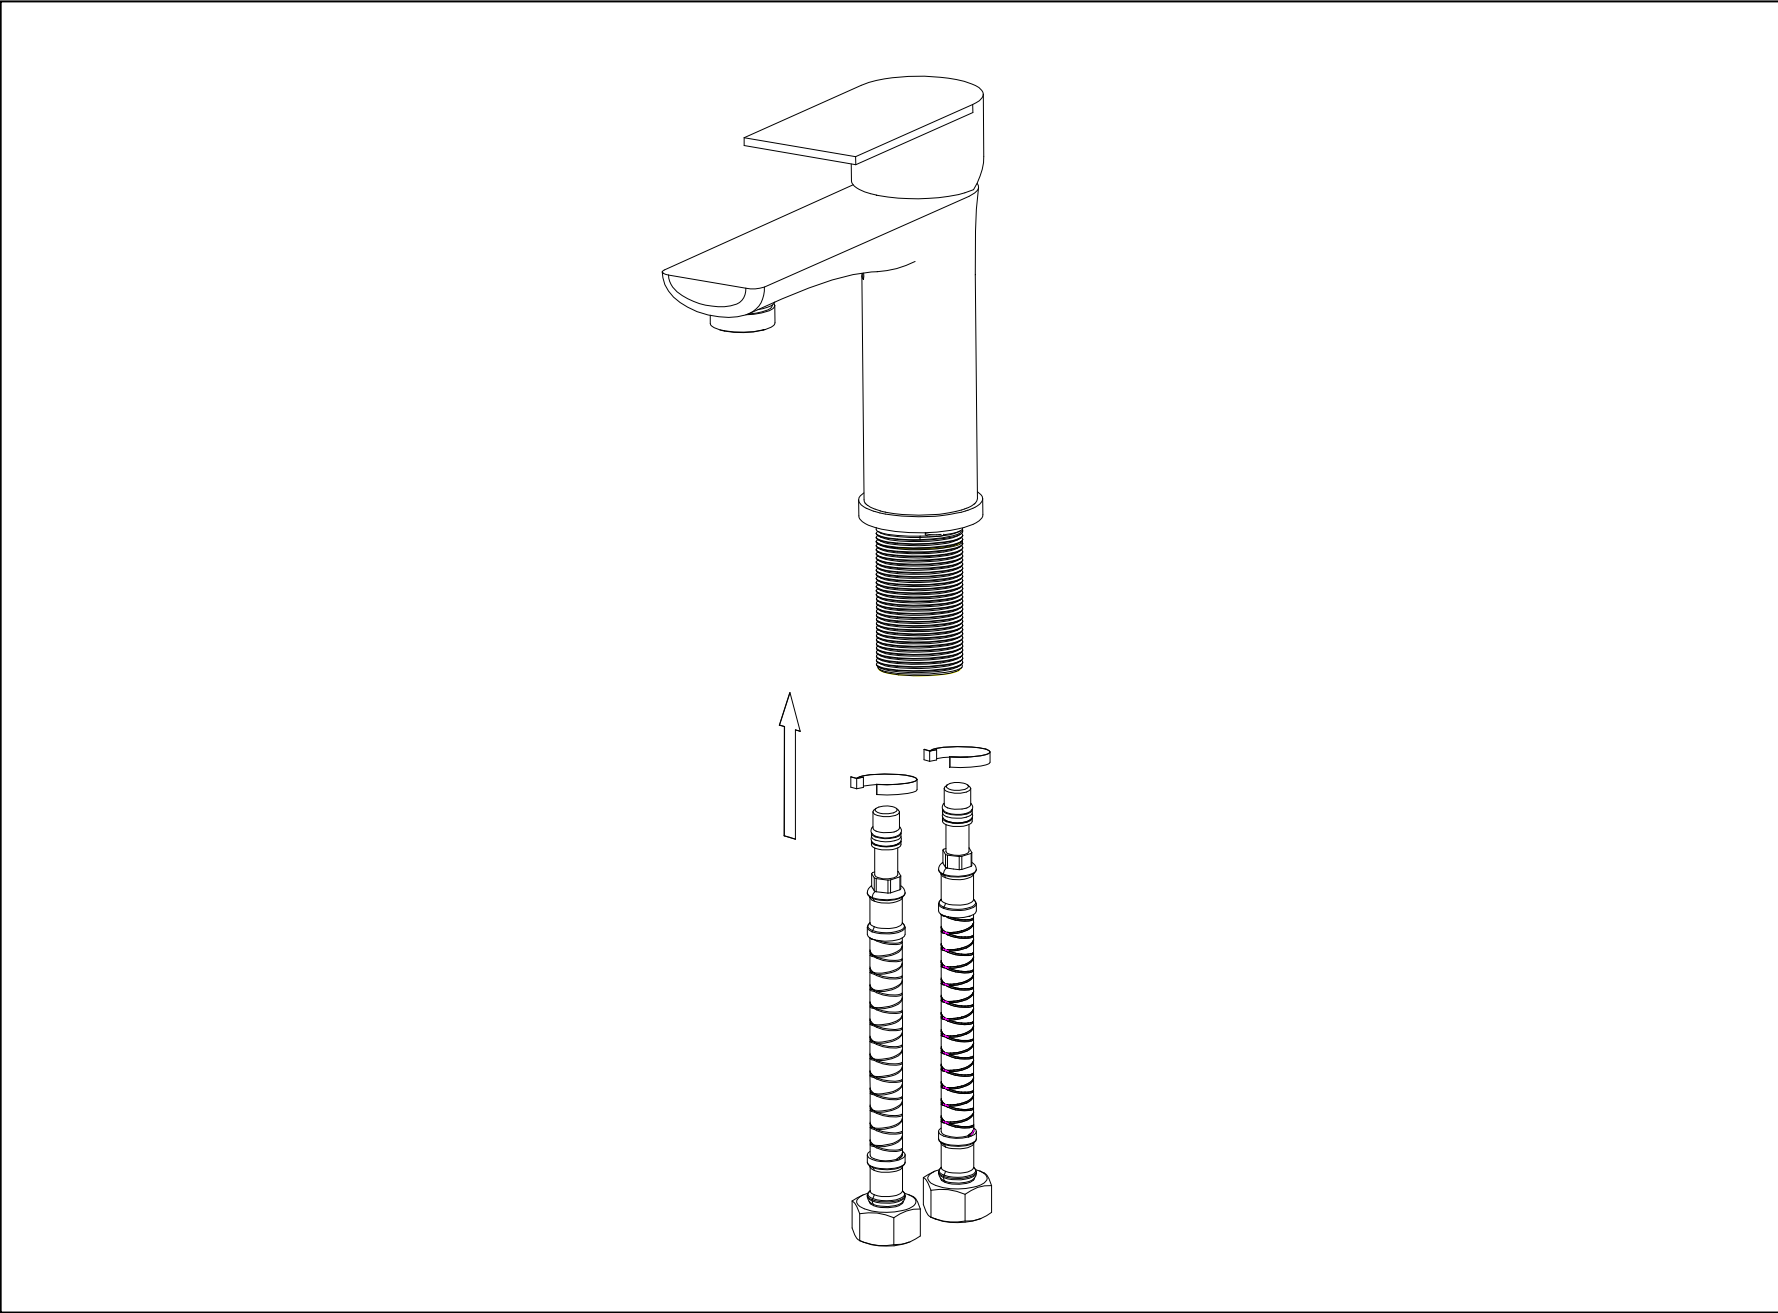


5.4 Position the rubber O-ring beneath the mounting hole, and then insert the faucet into this hole. Next, from underneath the sink, slide the rubber gasket and the mounting bracket onto the threaded shank.

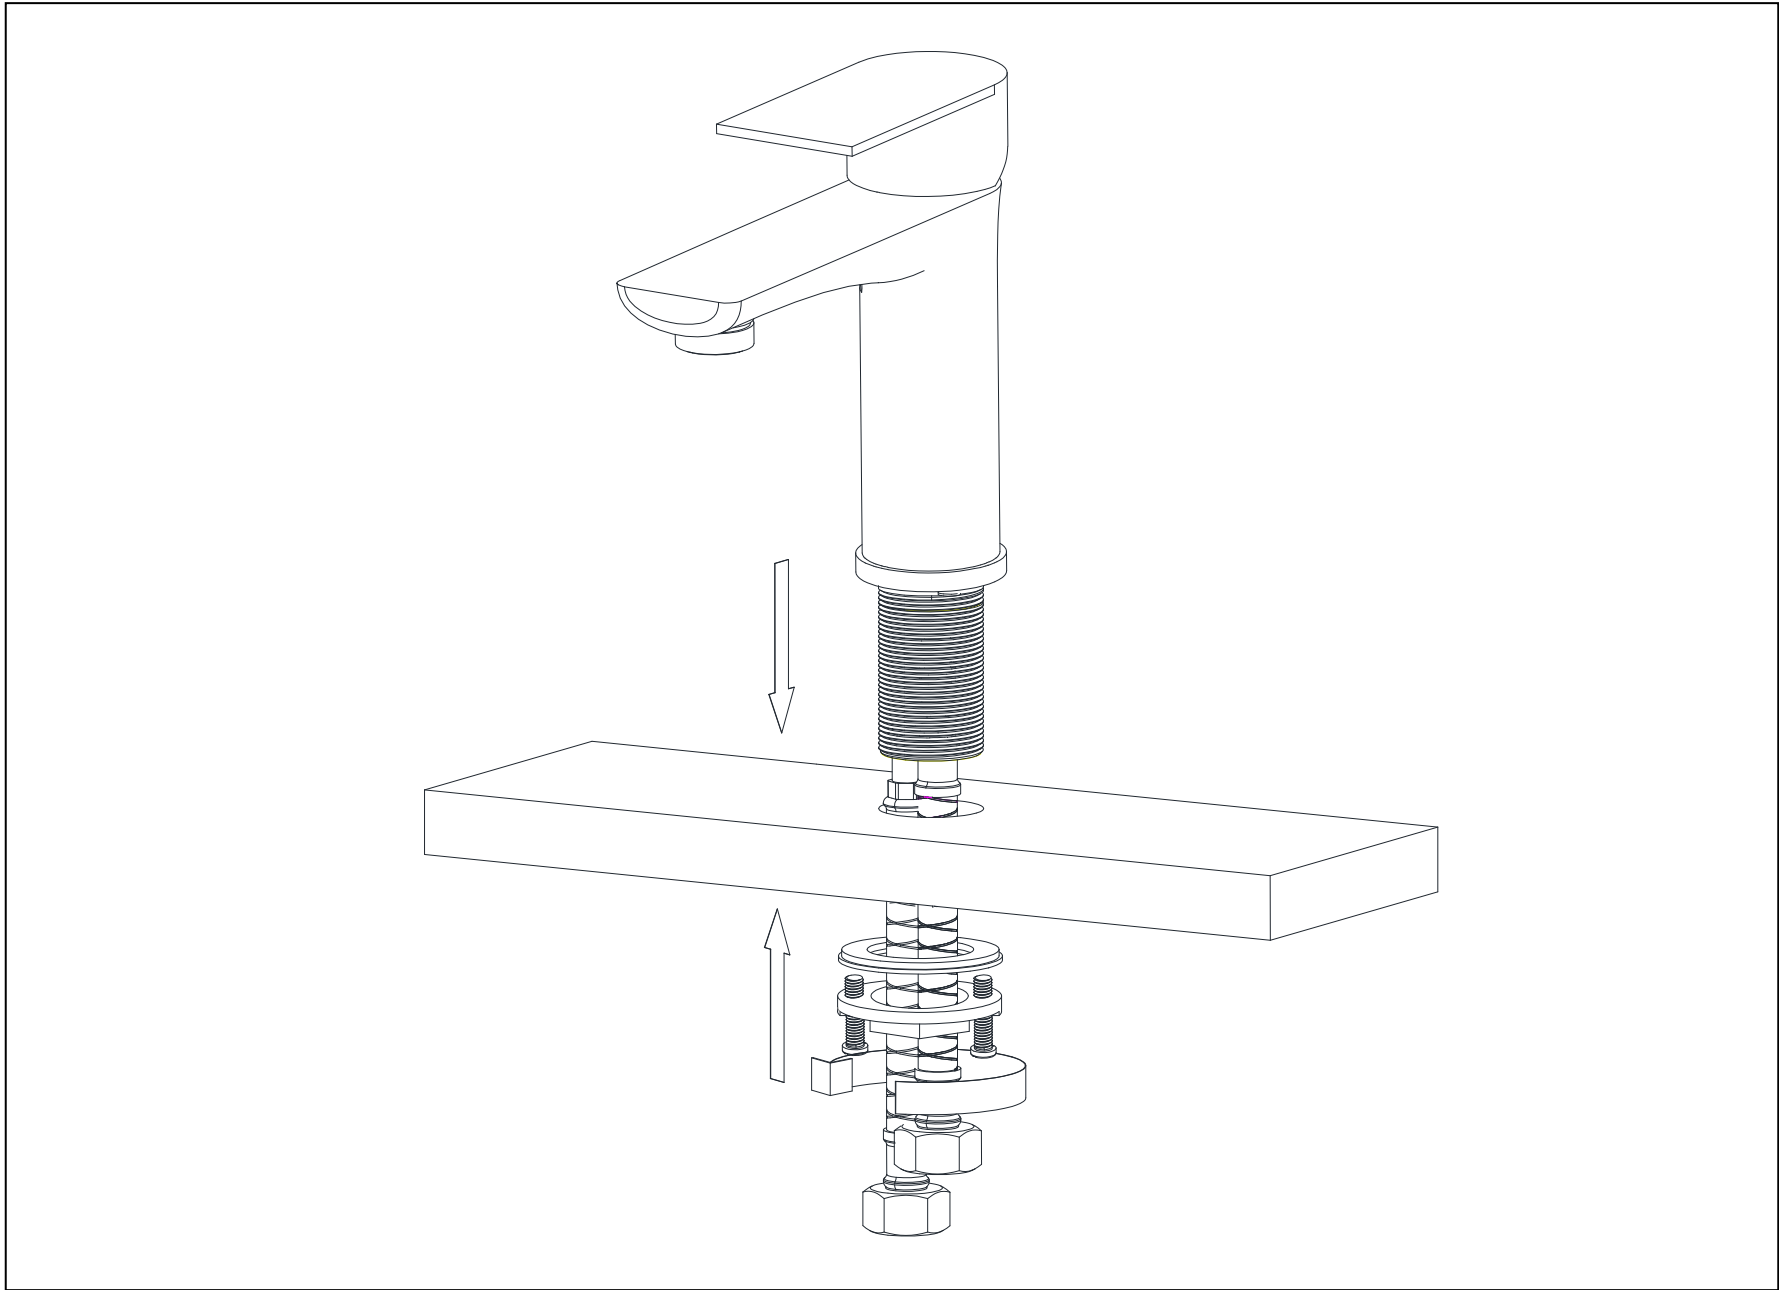

5.5 Secure valve body to the mounting board using screws, tightened with a Phillips screwdriver.

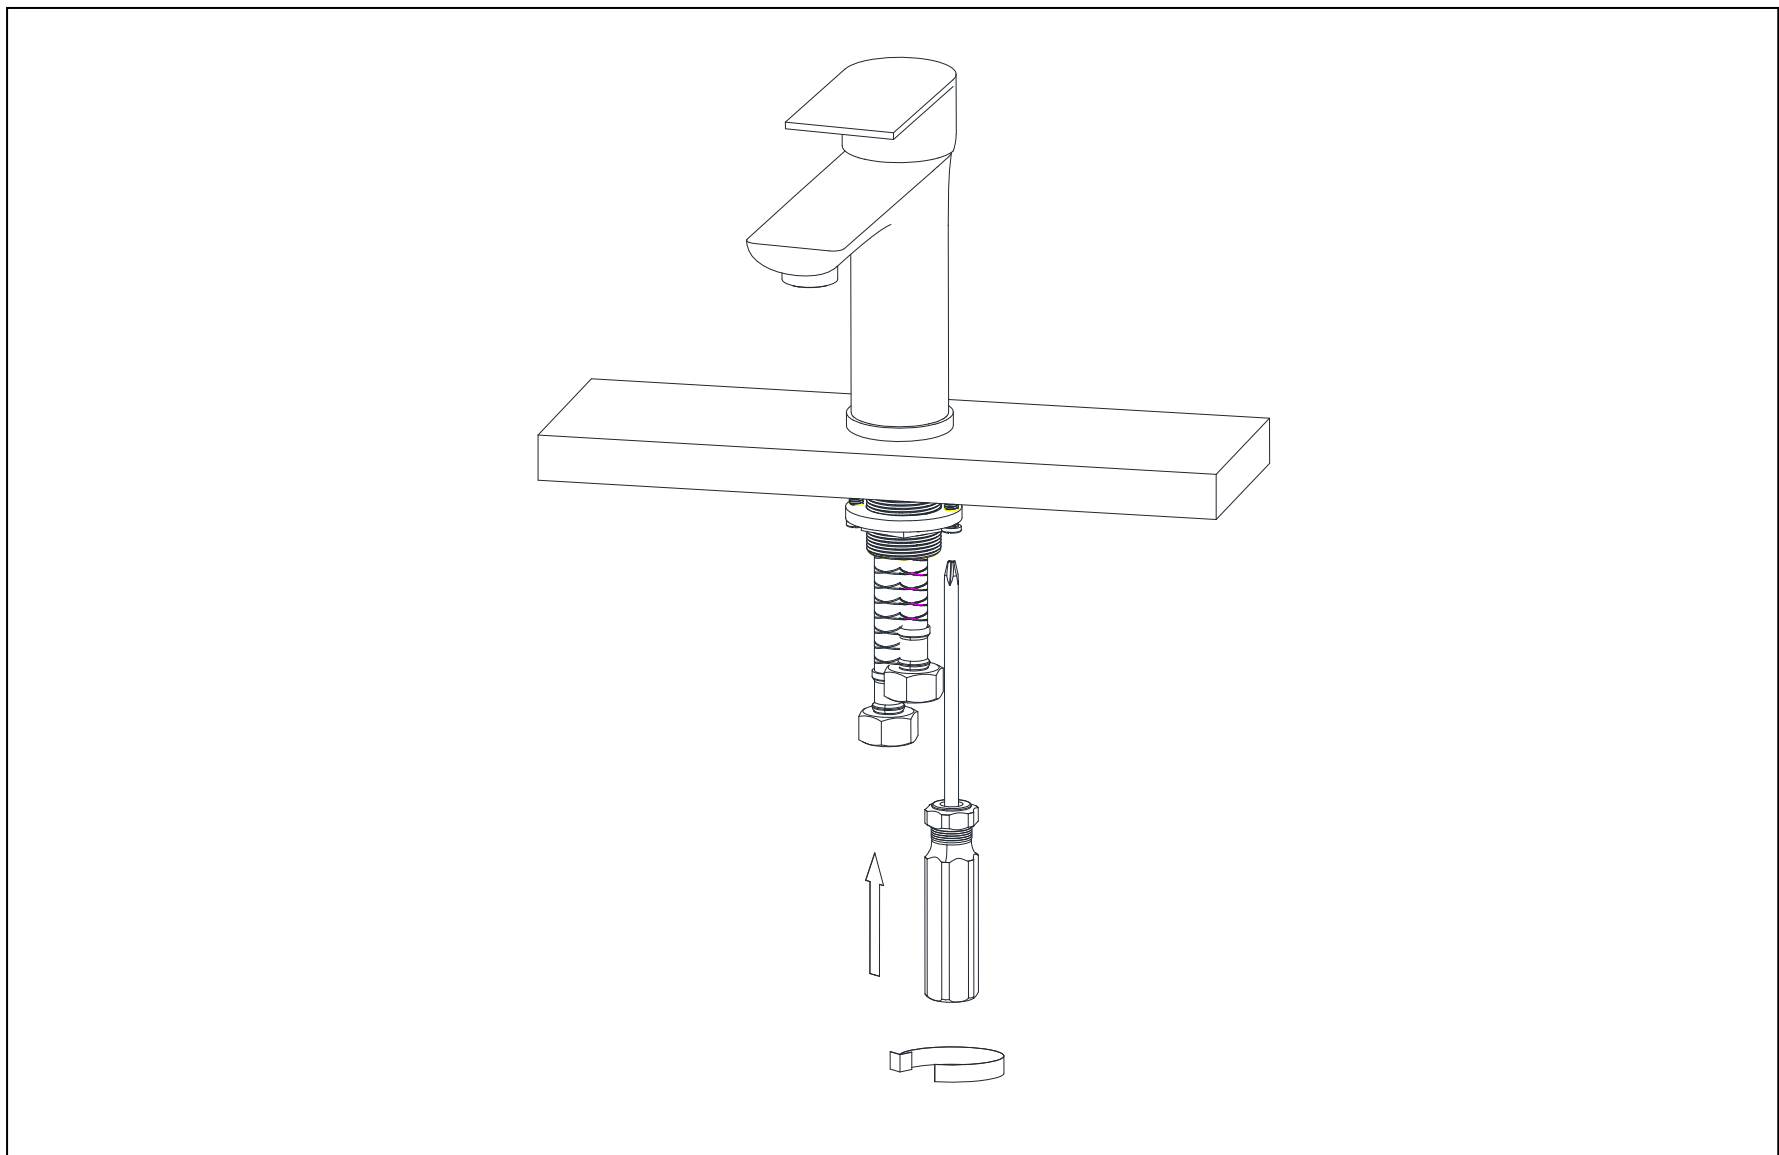

5.6 Connect the hot and cold water hoses from the faucet to the corresponding hot and cold supply valves. Tighten the mounting nut securely using a wrench.

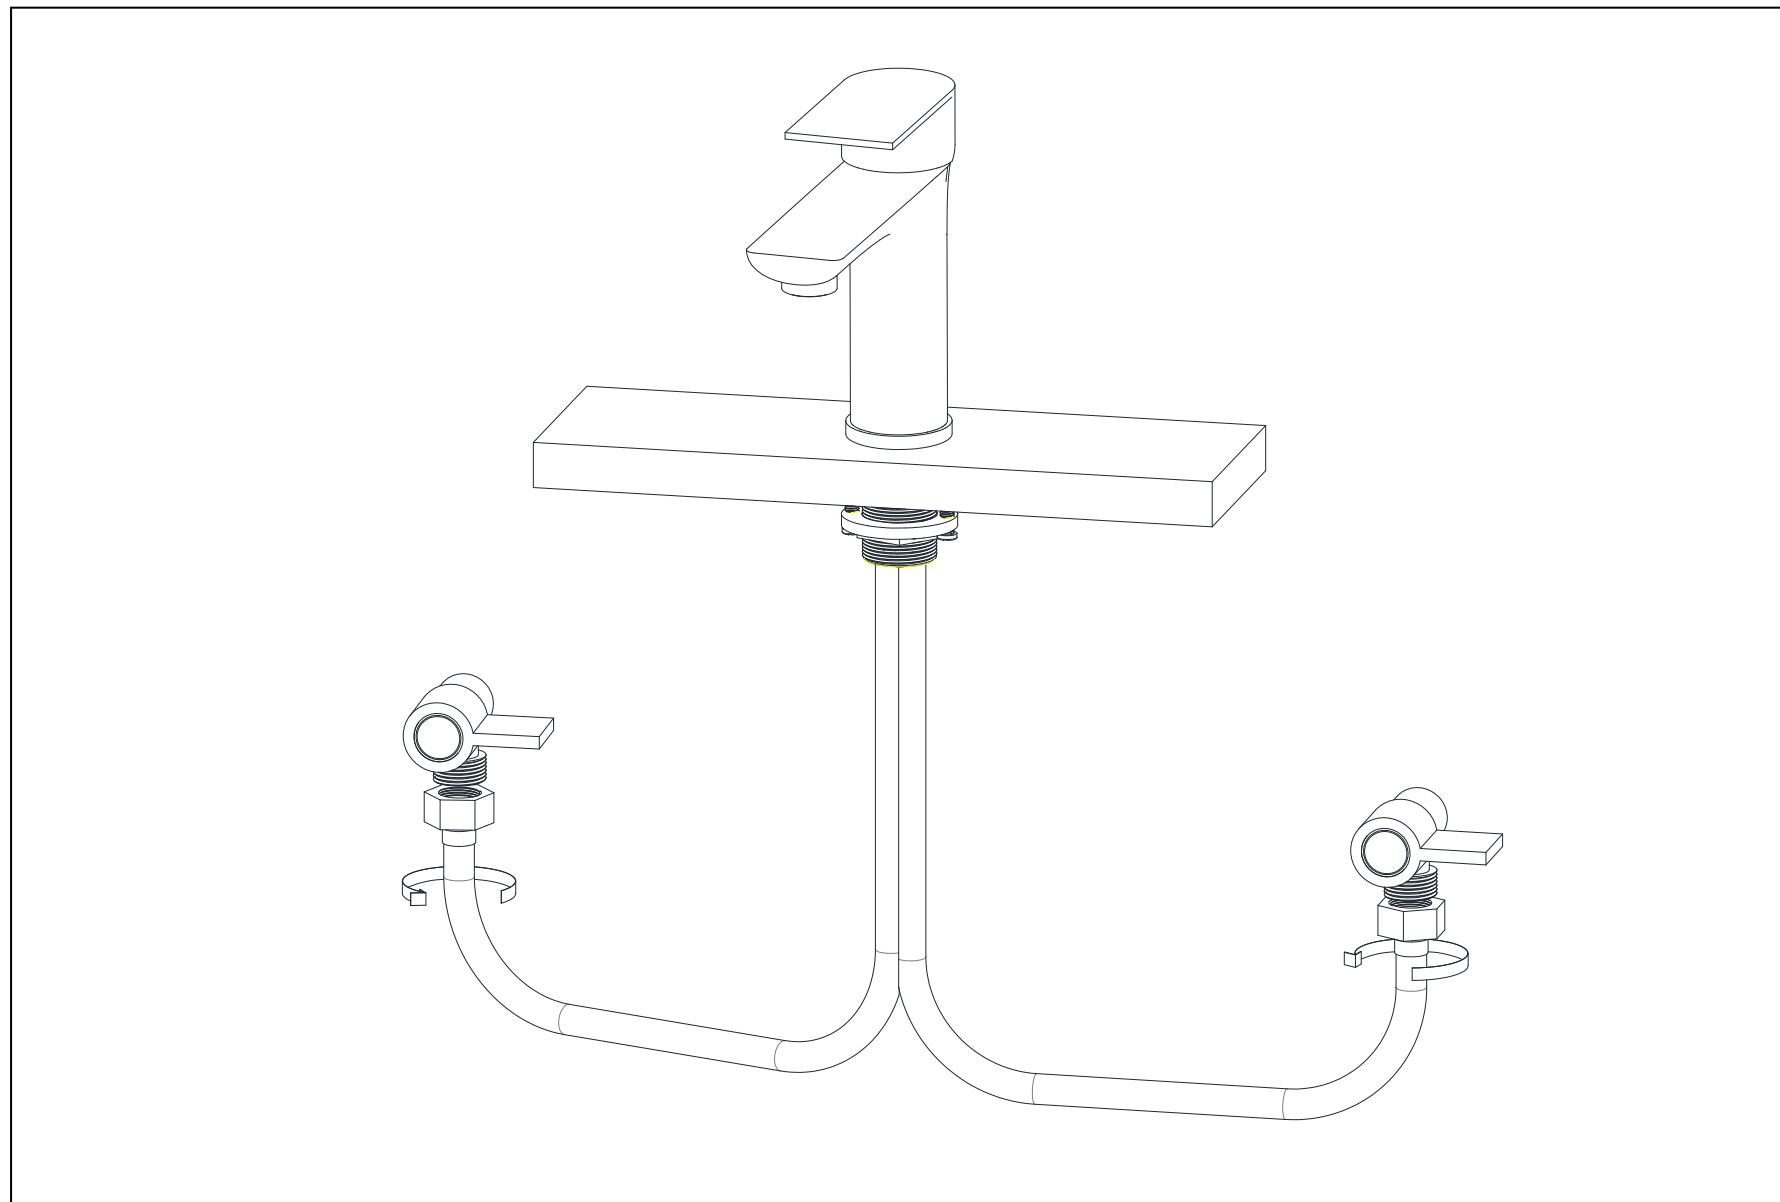

6. INSPECTION

Turn on the hot and cold water supplies, then inspect all connections for any signs of leakage to ensure a successful installation.

INSTALLATION COMPLETE



North America	Asia	Europe
SUMERAIN INTERNATIONAL GROUP INC.	HONGKONG SUMERAIN SANITARY INDUSTRY CO., LIMITED	SUMERAIN EUROPE SUPPORT TEAM
Add: 1400 Summit Ave, Suite A, Plano, TX 75074, USA	Add: ROOM 14 2/F WELLBORNE COMMERCIAL CENTRE NO.8 JAVA ROAD NORTH POINT HK	Add: Flottwellstr.15 10785 Berlin, Deutschland
Tel: +1-866-203-0866	Tel: +86-750-2731579	Tel: +49 (0)30/23975898
E-mail: support@sumerain.com	E-mail: support@sumerain.com	E-mail: support@sumerain.com