

INSTRUCTION 取扱説明書 사용설명서
ANWEISUNG INSTRUCTION




*Two people for assembly
*Installieren zwei Personen zusammen
*2人作業が必要です

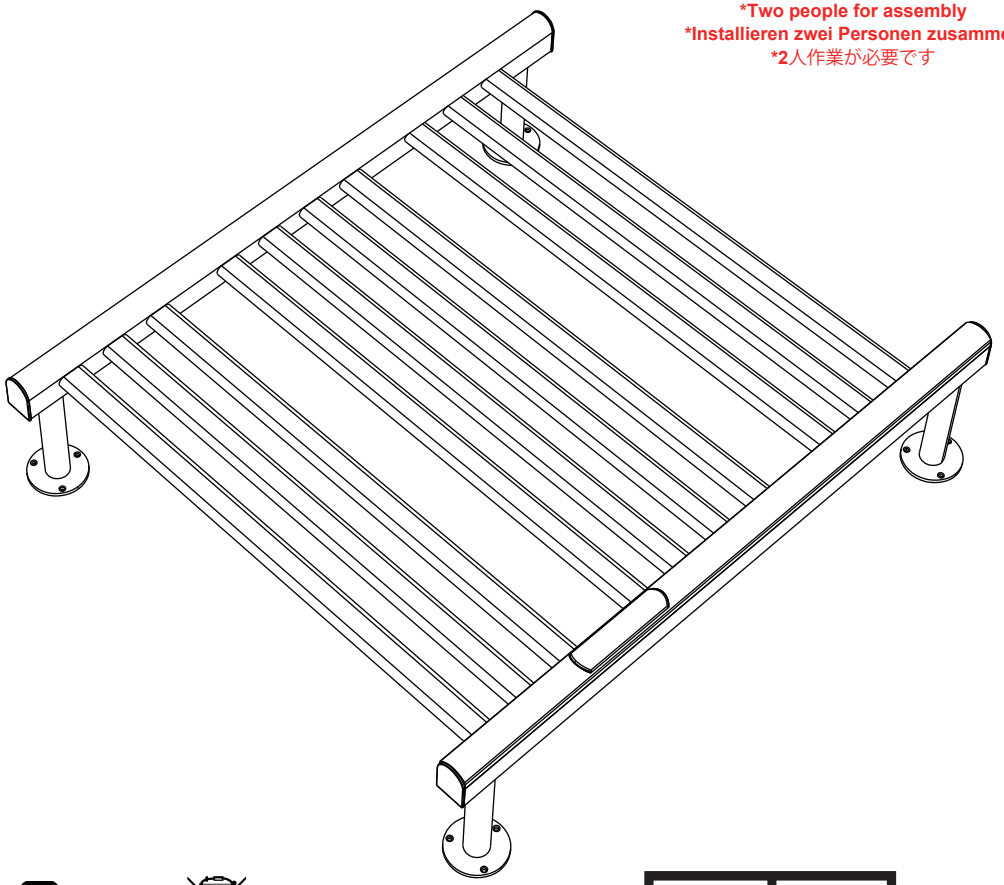

A*1

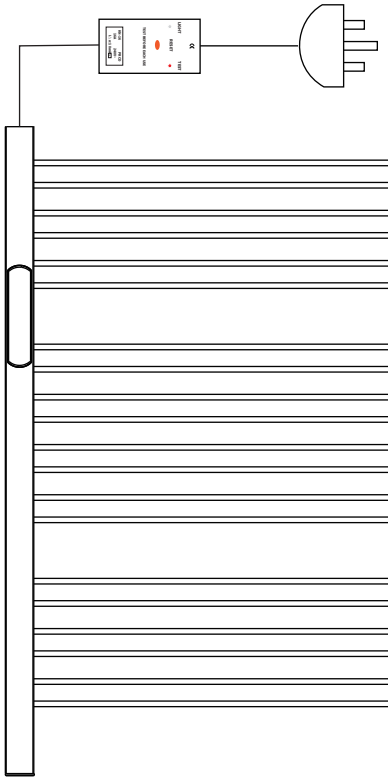

B*4



C*8



D*12




E*12




F*1



C*8

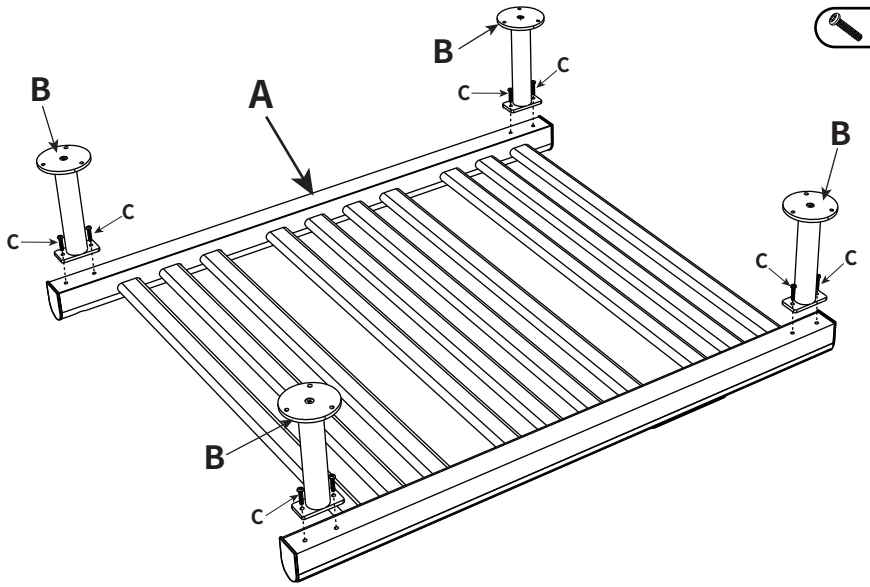









EC REP


C&E Connection
E-Commerce (DE) GmbH
Zum Linnegraben 20, 65933,
Frankfurt am Main, Germany
info@ce-connection.de

UK REP

Company:YH Consulting Limited
Address: C/O YH Consulting Limited Office 147,
Centurion House , London Road ,
Staines-upon-Thames , Surrey , TW18 4AX

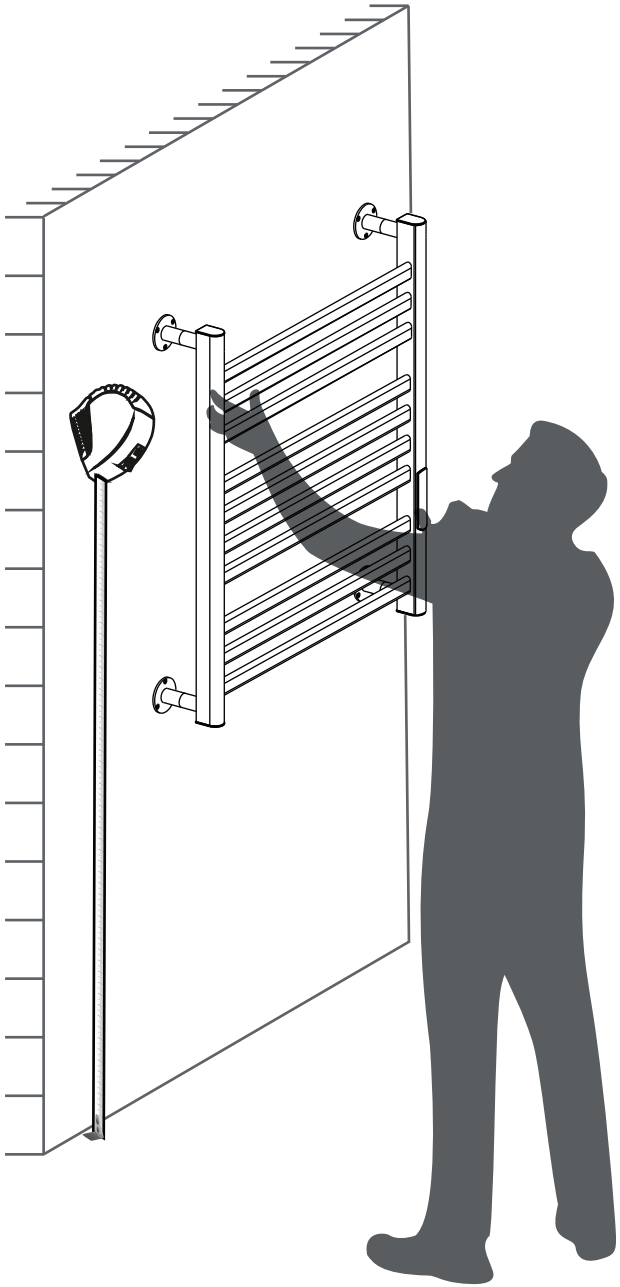


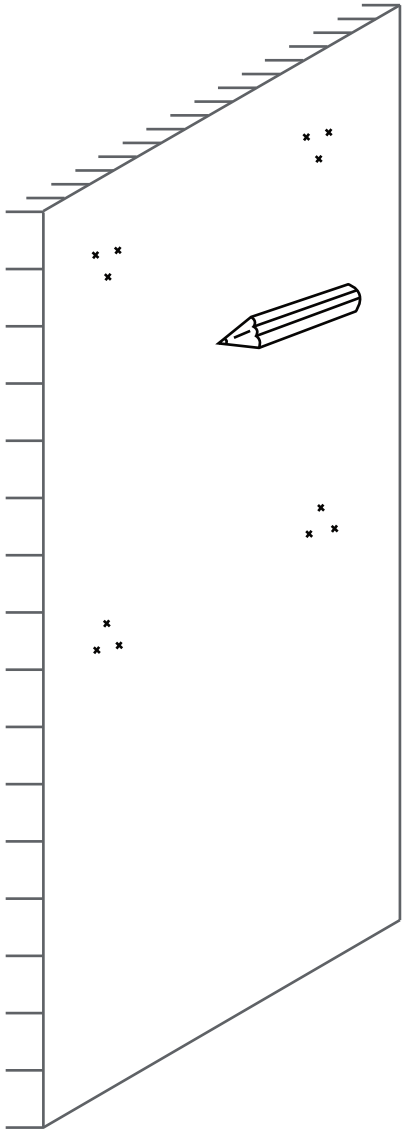


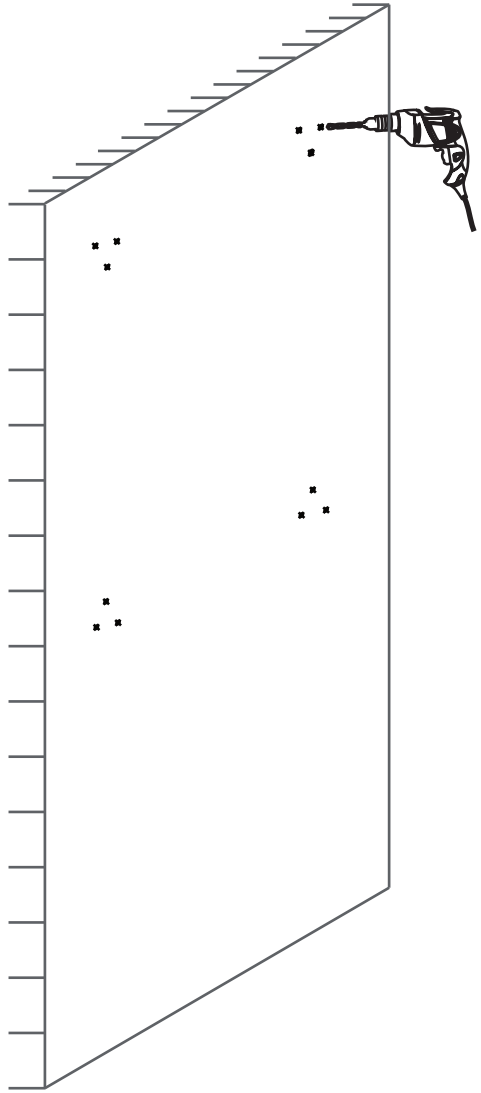

D*12

E*12

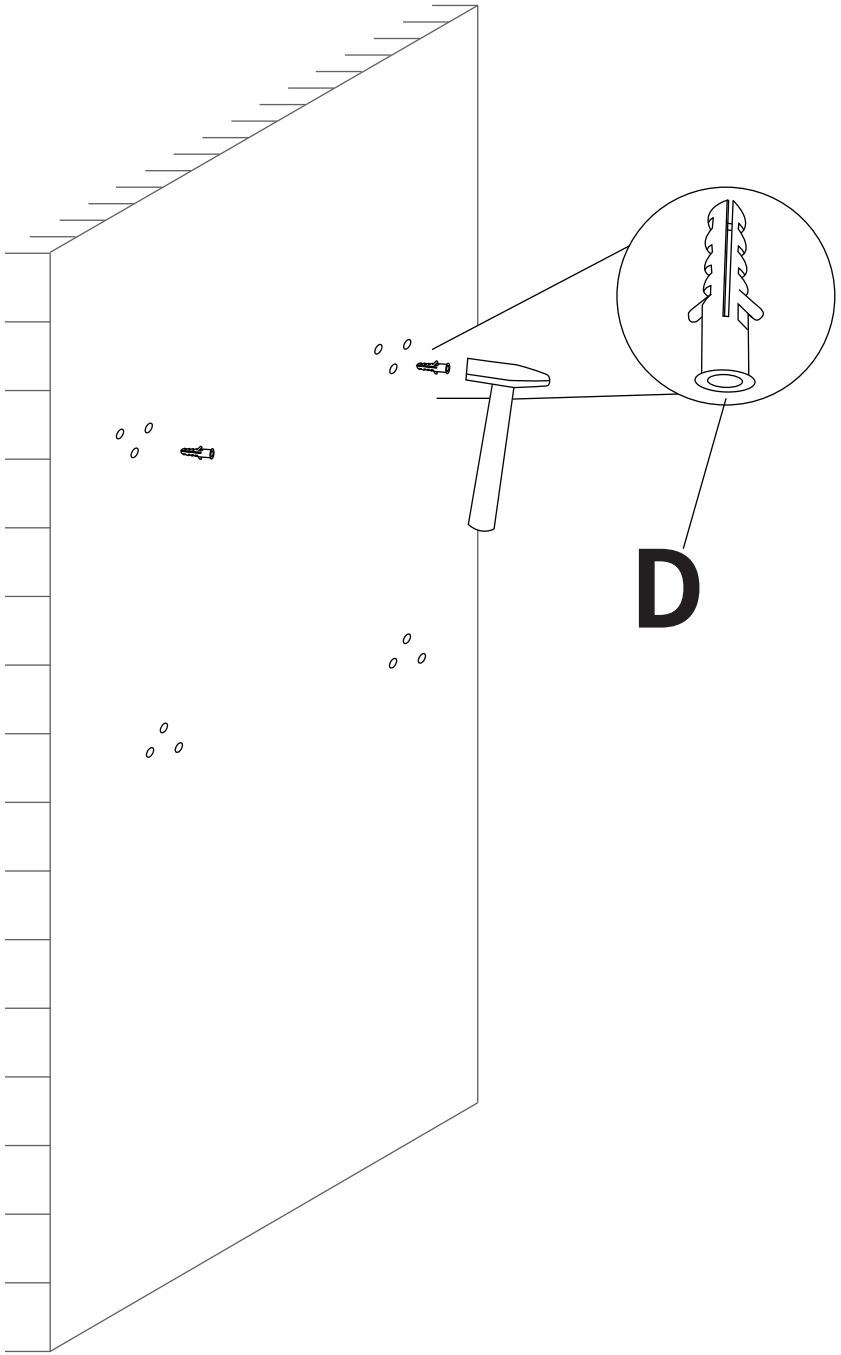

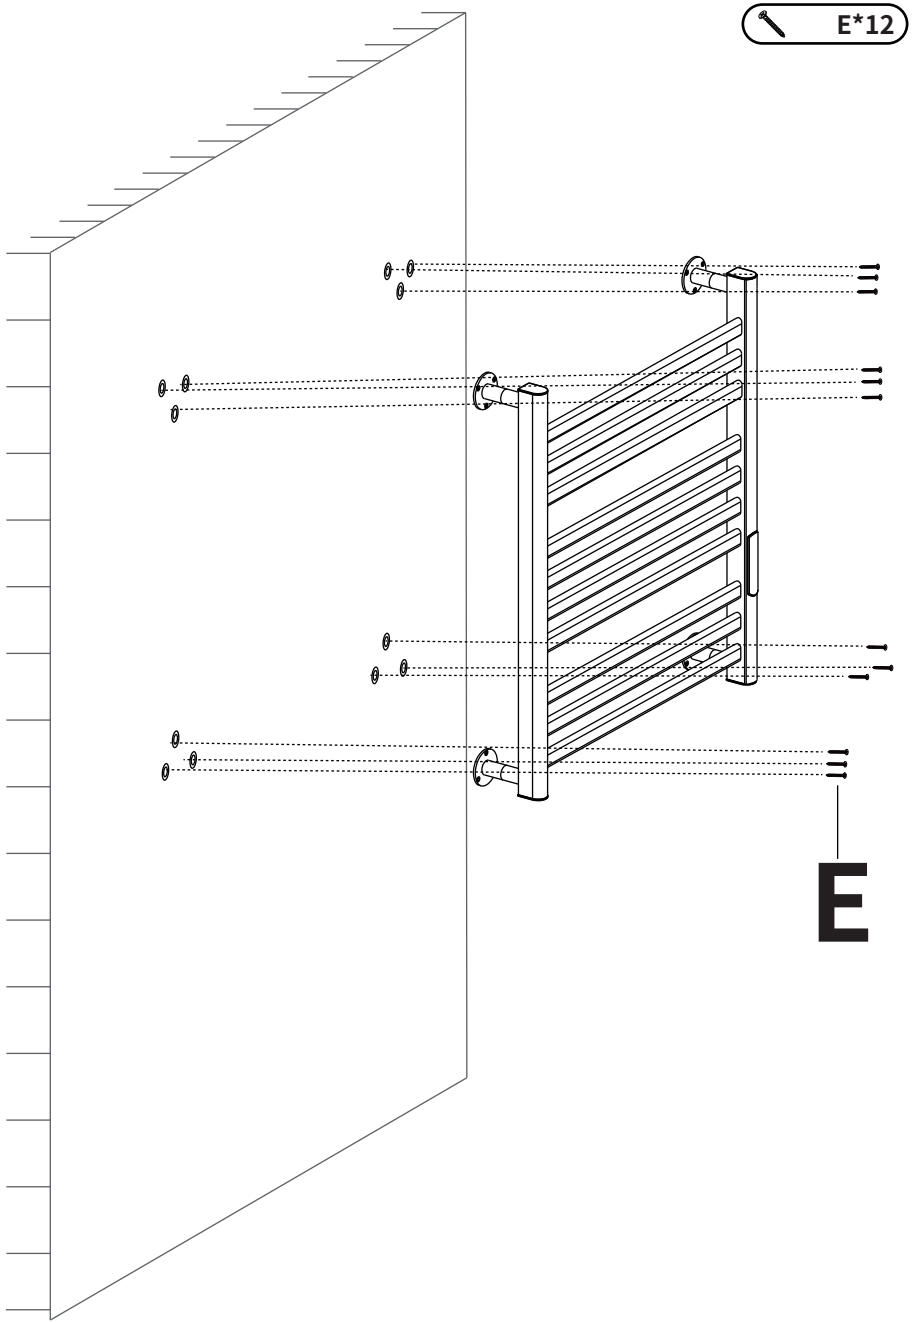

I、【Specifications】

1. Power Supply: AC220V±30V; 50/60Hz;
2. NTC Thermistor
3. Accuracy: ±1℃
4. Temperature Setting Range: 45℃、50℃、55℃
5. Temperature Display Range: 45℃、50℃、55℃
6. Working Temperature: 0～70℃
7. Operation: Touch button

II、【Functions Description】

1. Temperature Control: Turn on the heating when the temperature is 3℃ lower than the set temperature, and stop heating when temperature is greater or equal to the set temperature.
2. Countdown Shutdown: It will automatically power off if setting the countdown, the timer is valid once.



III、【Description Operator Panel】


1. Steady on in a stand-by state, the display screen and other button lights are not on. Press the to power on, the screen shows you can set the temperature.
2. Press to set temperature, the range is 45℃、50℃、55℃.
3. Press to set the shutdown time in a stand-by state, after setting, it starts counting down, the setting rage is 0~9 hours.
4. Fault Description: If the digital tube displays E1, it means that the temperature measurement probe is faulty.

I. 【Technische Spezifikationen】

1. Netzspannung: AC220V±30V; 50/60Hz;
2. Temperatursensor: NTC-Temperaturfühler;
3. Regelgenauigkeit: ±1°C;
4. Temperaturbereich: 45°C, 50°C, 55°C;
5. Temperaturanzeigebereich: 45°C, 50°C, 55°C;
6. Umgebungstemperatur: 0~70°C;
7. Bedienelemente: Touch-Tasten;

II. 【Funktionsbeschreibung】

1. Temperaturregelung: Heizung wird aktiviert, wenn die Temperatur um 3°C unter die eingestellte Temperatur fällt, und deaktiviert, wenn sie gleich oder höher ist.
2. Countdown-Abschaltung: Nach Einstellung des Countdowns wird das Gerät automatisch ausgeschaltet; die Countdown-Funktion ist nur einmalig wirksam.

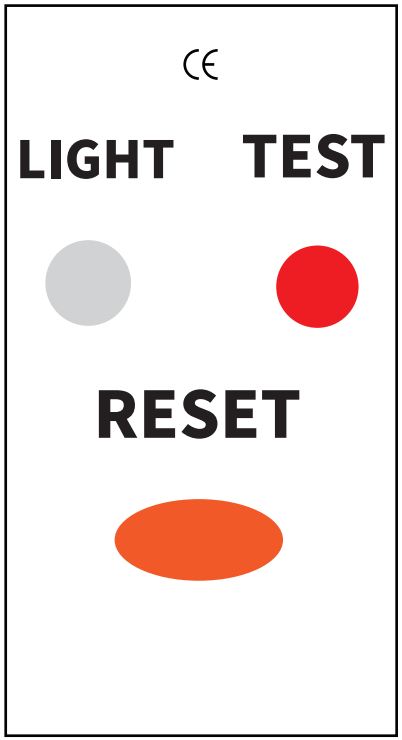

III. 【Bedienungsanleitung des Bedienfelds】

1.Im Standby-Modus leuchtet die dritte Taste konstant, das Display und andere Tastenleuchten sind aus. Durch Drücken der dritten Taste wird das Gerät eingeschaltet, und das Display zeigt die eingestellte Temperatur an.

2.Mit der zweiten Taste kann die Temperatur im Bereich von 45°C, 50°C und 55°C eingestellt werden.

3.Im eingeschalteten Zustand kann mit der ersten Taste die Countdown-Abschaltzeit eingestellt werden. Nach Abschluss der Einstellung startet der Countdown, der im Bereich von 0 bis 9 Stunden liegt.

4.Fehleranzeige: Wenn die Digitalanzeige "E1" anzeigt, liegt ein Fehler im Temperatursensor vor.