






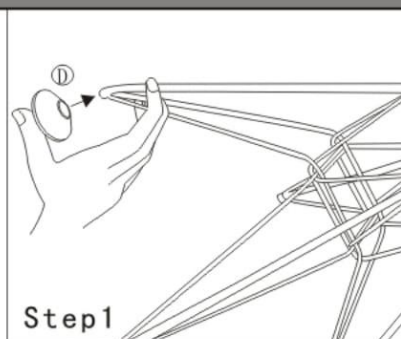
# ASSEMBLY INSTRUCTION

## COMPONENT PARTS

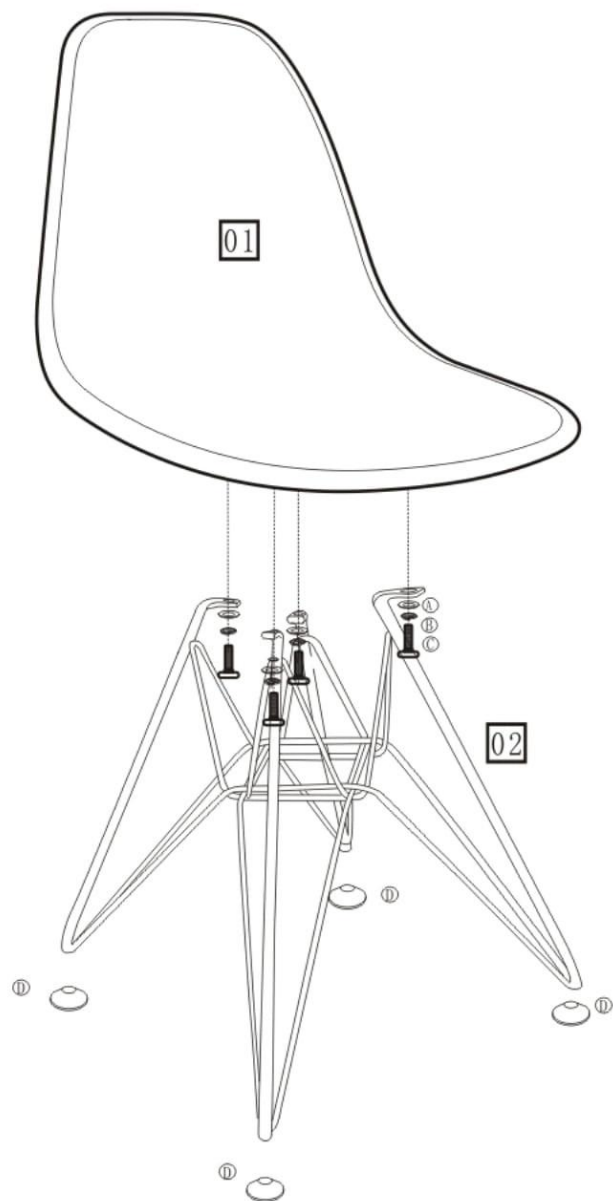


## FITTINGS

Ⓐ		<b>X4</b>
	Regular washer	
Ⓑ		<b>X4</b>
	Lock washer	
Ⓒ		<b>X4</b>
	Bolt	
Ⓓ		<b>X4</b>
	Plastic cap	




**Step1**

Slide the plastic cap onto the metal bar from the side (please do not force the cap from top by hammer)

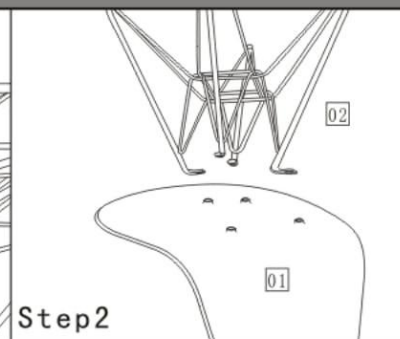


**Step2**

Please place the seat and the feet upside down

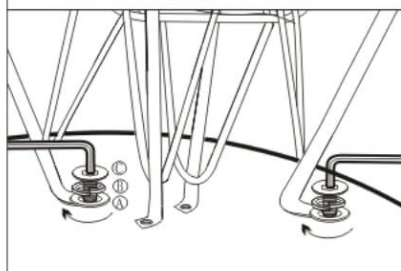

**Step3**

Please put 2 screws diagonally and rotate them into the holes loosely. Ⓐ should go closest to the chair. Ⓑ should go closest to the head of the bolt. Please be kindly noted that we can not tighten the screws at the moment.

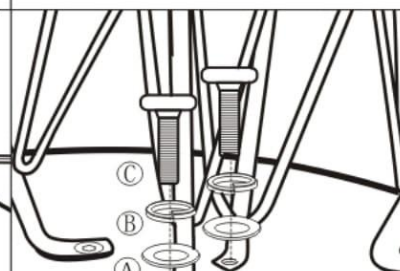


**Step4**

Please load the remaining 2 screws also diagonally



**Step5**

Please push the metal bars on the shell until the holes match with each other

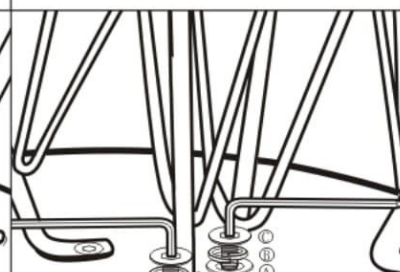

**Step6**

Tighten these 2 screws together with the previous 2 screws.

## COMPONENT CHECKLIST

PART	No.	Qty.	
Seat	01	1	□
tube	02	1	□

## TOOLS REQUIRED



Allen key (supplied)