


Features

- *ExoCrylic™*
- *Oval shape*
- *Drop-in installation*
- *Six individually adjustable ProFlex® hydro-massage jets*
- *Pump with air switch and grounding-type plug-in cord*
- *Molded lumbar support and armrests for comfort*
- *UL listed*
- *Optional K-9696 whirlpool trim kit in additional finishes*
- *72" (1829 mm) x 42-1/8" (1070 mm) x 19-3/4" (502 mm)*

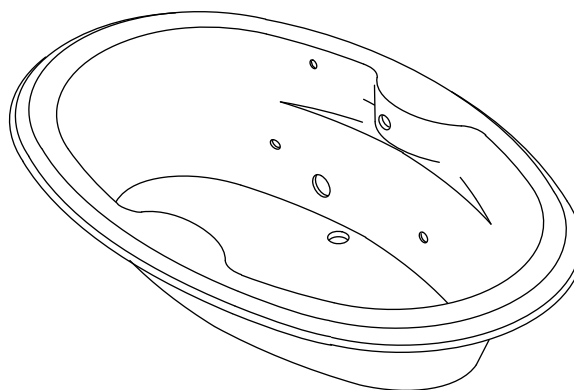

Codes/Standards Applicable

Specified model meets or exceeds the following:

- *ASME A112.19.7/CSA B45.10*
- *CSA B45.5/IAPMO Z124*
- *UL 1795*

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes		
K-1148	Whirlpool bath	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
Recommended Accessories				
K-7213	Cable drain with PVC tubing	<input type="checkbox"/> CP		<input type="checkbox"/> Other_____
K-7214	Cable drain without PVC tubing	<input type="checkbox"/> CP		<input type="checkbox"/> Other_____
K-11677	Adjustable trip lever bath drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	
Optional Accessories				
K-9696	Jet trim kit (metal finishes)	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____

Product Specification

The ExoCrylic whirlpool bath shall be 72" (1829 mm) in length, 42-1/8" (1070 mm) in width, and 19-3/4" (502 mm) in height. Whirlpool shall be oval shaped and for drop-in installation. Whirlpool shall have six individually adjustable ProFlex hydro-massage jets, and pump with air switch and grounding-type plug-in cord. Whirlpool shall have molded lumbar support and armrests for comfort. Whirlpool shall be UL listed. Whirlpool shall feature optional K-9696 whirlpool trim kit in additional finishes. Whirlpool bath shall be Kohler Model K-1148-_____.

Technical Information

Included components:	
Cutout template	114861-7

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Locate the outlet behind the whirlpool and within 24" (610 mm) of the pump.

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 36 lbs/square foot (173 kg/square meter) loading.

Top View: Shows the oval shape of the toilet bowl. Dimensions include a total width of 35" (889 mm) and a total length of 72" (1829 mm). The bowl opening is 30" (762 mm) wide. The pedestal height is 19-3/4" (502 mm). The bowl depth is 14" (356 mm). The lumbar angle is 26° on the left and 30° on the right. The pump/control access is 20" (508 mm) wide and 15" (381 mm) high minimum. The 1-1/2" (38 mm) bath drain is located at the bottom center.

Side View: Shows the profile of the toilet. Dimensions include a total height of 20-1/2" (521 mm) and a bowl depth of 12-1/2" (318 mm). The pedestal height is 19-3/4" (502 mm). The bowl opening is 30" (762 mm) wide. The lumbar angle is 26° on the left and 30° on the right. The pump/control access is 20" (508 mm) wide and 15" (381 mm) high minimum. The 1-1/2" (38 mm) bath drain is located at the bottom center.

Cut-Out Detail: Shows the dimensions for the cut-out in the floor. The cut-out is 35" (889 mm) wide and 20" (508 mm) deep. The cut-out is symmetrical about the centerline (CL). The cut-out is 10" (254 mm) wide at the top and 12-1/2" (318 mm) wide at the bottom. The cut-out is 17" (432 mm) high at the top and 19-1/2" (495 mm) high at the bottom. The cut-out is 20-1/2" (521 mm) high at the bottom.

Drop-In Rim Detail: Shows the dimensions for the drop-in rim. The rim is 42-1/8" (1070 mm) wide. The rim is 2-1/2" (64 mm) high. The rim is 2-7/8" (73 mm) high. The rim is 3" (76 mm) wide. The rim is 1/4" (6 mm) high. The rim is 1-1/2" (38 mm) high.

PROFLEX® 7242 WHIRLPOOL BATH
Page 2 of 2
1013035-4-F

THE BOLD LOOK
OF **KOHLER**®