La Plus Belle

ASSEMBLING & INSTALLATION INSTRUCTIONS

The drawing shown may not exactly match the product enclosed.
However, the installation instructions do apply to this product.

***WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

***ATTENTION! COUPER LE COURANT AU FUSIBLE OU UN DISJONCTEUR.

ASSEMBLING THE FIXTURE

1. Carefully unpack the package and lay out all the parts on a clear area, make sure all parts are present. Compare parts with **PACKAGE CONTENTS (FIG.1)** and **HARDWARE CONTENTS(FIG.2)** list . If any part is missing or damaged, do not attempt to assemble the product.
2. Assemble the fixture following the assembly steps shown in **ASSEMBLY ILLUSTRATION (FIG.3)**

Steps:

(1) Loosen C to remove B and C from A1; loosen the hex nuts (D,F) and lock washers(E,G) from A2; loosen the hex nuts(F) from A3.

(2) Insert the wires up through the outer large holes and the 8/32 threaded rods through two small holes of the wall canopy. Fit lock washers (E) and hex nuts (D) loosely onto nipples, then fasten hex nuts (D) firmly.


(3) Fit the lock washers(G) and hex nuts(F) loosely onto the threaded rods. Then fasten hex nuts (F) firmly.

(4) Pass one end of the fixture body through A3, then slide A3 to the middle position of the fixture body.

(5) Insert the 8/32 threaded rods up through the outer holes of the wall canopy and fit the hex nuts (F) loosely onto the threaded rods. Then fasten the hex nuts (F) firmly.

(6) Assembly is now complete.

PACKAGE CONTENTS (FIG.1)



PART	DESCRIPTION	QTY.	PART	DESCRIPTION	QTY.	PART	DESCRIPTION	QTY.
A1	Fixture Parts-1	1	B	Mounting Plate	1	E	1/8 lock washer	1
A2	Fixture Parts-2	2	C	Set screws	4	F	8/32 IP hex nuts	4
A3	Fixture Parts-3	3	D	1/8 IP hex nut	1	G	8/32 lock washers	2

HARDWARE CONTENTS (FIG.2)




open-end wrench
(AA) Qty. 1




Wire Nuts
(BB) Qty. 3

Mounting Screws
(CC)Qty. 2


ASSEMBLY ILLUSTRATION (FIG.3)

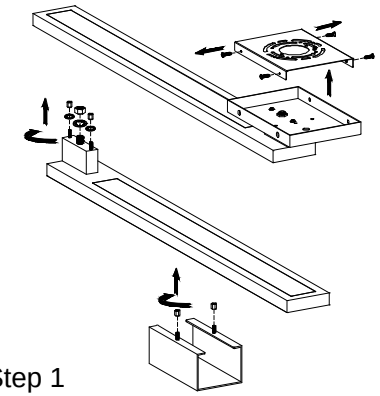


Step 1

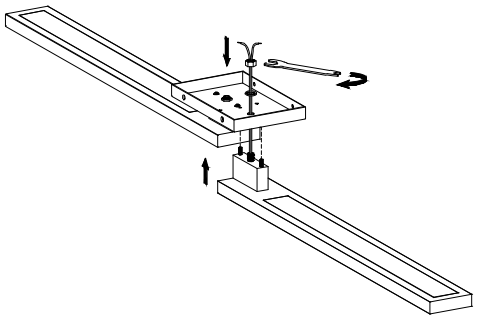


Step 2

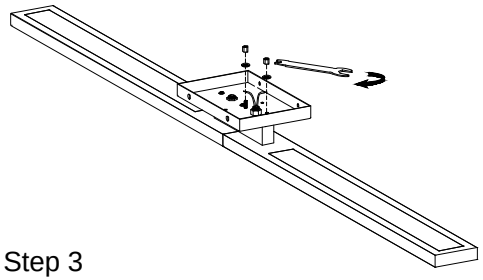


Step 3

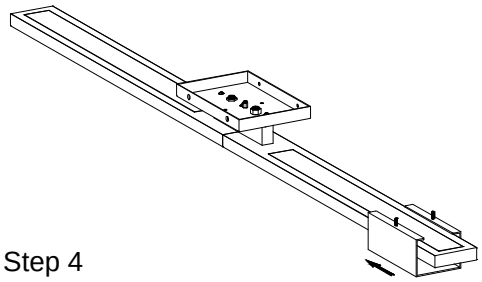

Step 4

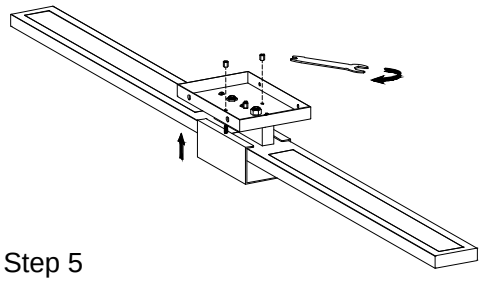


Step 5

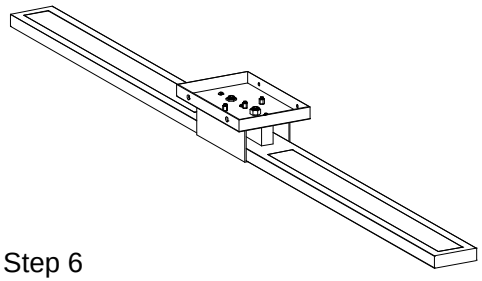

Step 6

FIG.4

To prevent moisture from entering the outlet box and causing a short, use clear caulking (i.e. Indoor/Outdoor Silicone Sealant) to outline the outside of fixture back plate where it meets the wall leaving a space at bottom to allow moisture a means to escape.




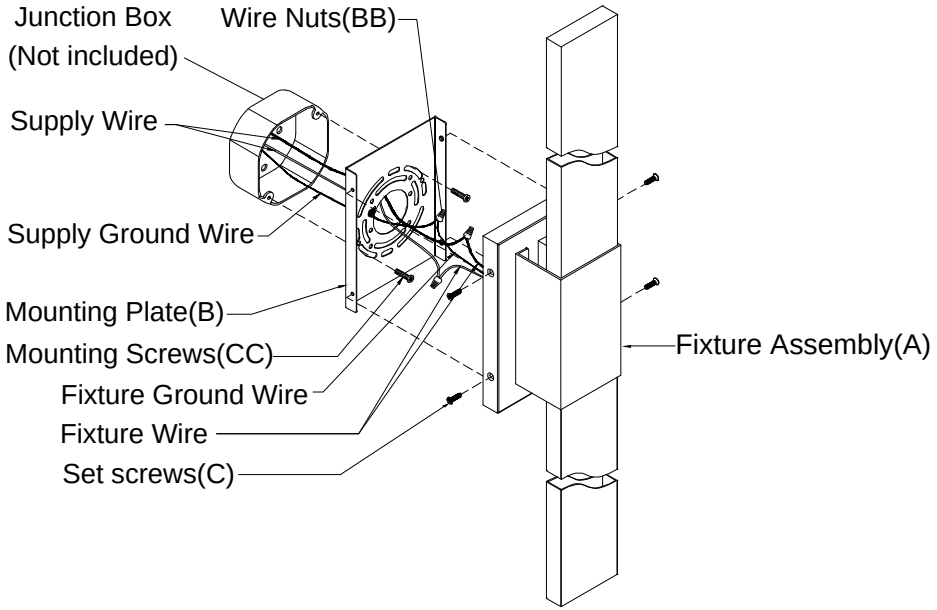


FIG.5

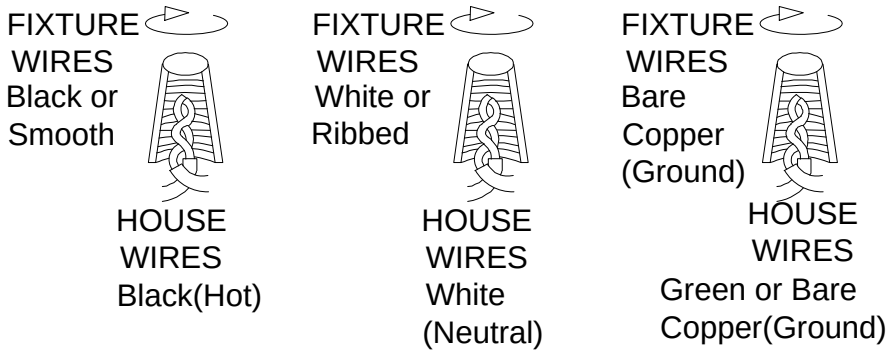

INSTALLING THE FIXTURE (Fig.4)

1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Junction Box.
2. Attach the **mounting plate(B)** to the junction box using two **Mounting Screws** (CC) as shown. The side of the mounting plate marked "**GND**" must face out. **The junction box is not included.**
3. Follow wiring instructions carefully.(see fig.5)
4. Install **Fixture Assembly** (A) on the **mounting plate(B)** and secure it with **Set screws** (C).

CONNECTING THE WIRES (Fig.5)

1. Connect the electrical wires as follows. Connect the Black wire from the fixture to the black house (hot) Wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet box has a ground wires (green or bare copper) connect fixture's ground wire to it. Otherwise attach the bare copper fixture wire to the green ground screw on the mounting plate.
2. Tuck the wire connections neatly into the wall junction box.

Your installation is now complete. Return power to the junction box and test the fixture.