

PANDORA WS25125

WALL

PROJECT



WS25125-BK
Black



WS25125-BN
Brushed Nickel



WS25125-GD
Gold



WS25125-WH
White


SPECIFICATION DETAILS

* For custom options, consult factory for details.

Fixture Dimensions	W4-5/8" x H28" x E3-7/8"
Light Source	LED with DC Driver
Wattage	20W
Total Lumens	1440lm
Delivered Lumens	BK-400lm*; BN-705lm*; GD-580lm*; WH-867lm;
Voltage	120V
Color Temperature	3000K
CRI (Ra)	90CRI
Optional Color Temps	2700K - 5000K Available, Minimum Order Quantities Apply
LED Rated Life	50,000 hours
Dimming	100% - 10%, TRIAC or ELV Dimmer (Not Included)
Diffuser Details	White Acrylic Diffuser
ADA Compliant	Yes
Compliance	Energy Star; T24-JA8; ADA;
Location	Dry
Warranty	5 Years
Illumination Direction	Fontlight Illumination
Mounting Style	All Orientation; Wall;
CEC Title 24 JA8	Yes, JA8-19
Energy Star Certified	Energy Star Compliant
Canopy Dimensions	W3" x H5-1/8" x E1-5/8"

DESCRIPTION

Square profile linear aluminum with rectangular wall mount. Inset opal polymeric diffuser. Finely textured plate or powder-coated finish. Wall emitting light with rotational adjustment.

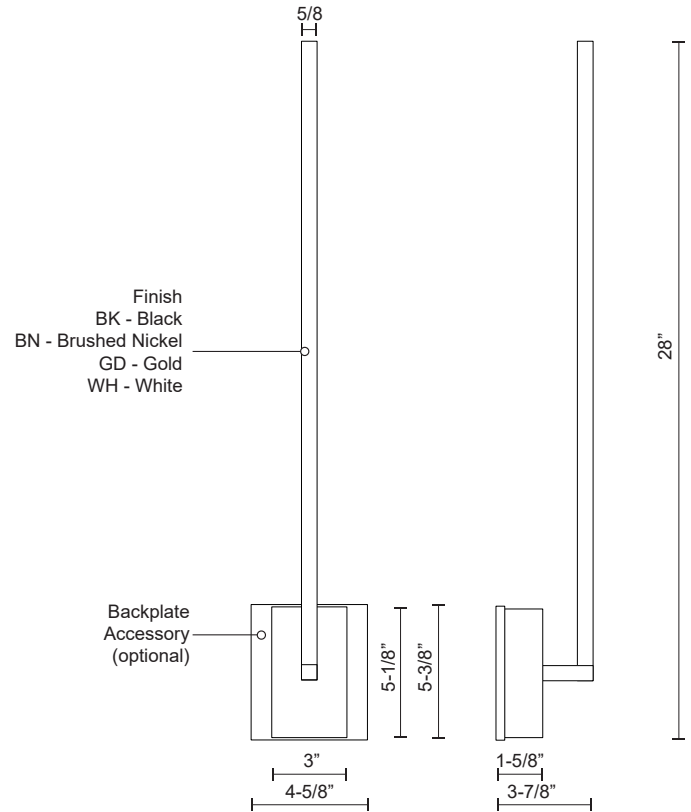

KUZCO

19054 28TH AVENUE
SURREY - BC V3Z 6M3
CANADA

WWW.KUZCOLIGHTING.COM

COMMENT