



## INSTALLATION, OPERATION AND MAINTENANCE MANUAL

# MODELS: WP-2 LCV



WP-2 LCV Tested and certified by NSF International against NSF/ANSI Standard 53 for the reduction of claims specified on the performance data sheet.

Please read carefully before proceeding with installation. Your failure to follow any attached instructions or operating parameters may lead to the product's failure.

Refer to enclosed warranty for operating parameters to ensure proper use with your water supply.

Watts Premier, Inc.  
Phone: 800-752-5582  
Manual #: 199389

8716 W Ludlow Drive Suite #1  
[www.wattspremier.com](http://www.wattspremier.com)

Peoria, AZ 85381  
Fax: 623-866-5666  
Manual Date: 05/18/2012



***Thank you for your purchase of a state of the art Watts Premier Water Treatment system.***

## **WP-2 LCV Water Treatment System:**

Watts Premier WP-2 LCV water treatment system contains a heavy duty lead, cyst and VOC filter block. This specialty formulated block is capable of reducing lead, cryptosporidium, Giardia, Entamoeba as well as harmful Chemicals (See performance data sheet for complete list of VOC's). It is estimated that VOC's are present in one-fifth of the nation's water supplies. These water contaminants can enter ground water from a variety of sources including localized use of herbicides and pesticides, gasoline or oil spills, leaking underground fuel tanks, septic system cleaners, and chemicals used in the dry-cleaning industry. See performance data sheet for individual contaminants and reduction performance.

## **System Maintenance**

Just because you can not taste it, does not mean that it is not there. Many contaminants in the drinking water are undetectable to the taste. Additionally, over time if you do not replace the filter elements, other bad tastes and odors will be apparent in your drinking water. This is why it is important to change your filters at the recommended intervals as indicated in this system manual.

When replacing any of the filter elements, pay special attention to any cleaning instructions. Should you have any further questions please refer to our web site at [www.wattspremier.com](http://www.wattspremier.com) or call our customer service department at 1-800-752-5582.

# Table of Contents

Service Record..... 4

Operational Parameters ..... 5

Contents of Reverse Osmosis System..... 5

Tools Recommended For Installation ..... 5

Plumbing diagram and parts list ..... 5

Drill a Hole for the Reverse Osmosis Faucet ..... 6

Mounting System Under Sink ..... 6

Faucet Installation ..... 7

Blue Tube Connection ..... 7

Adapt-a-Valve Installation ..... 8

Green Tube Connection ..... 8

Start-up Instructions ..... 9

Changing The Filter Cartridges ..... 10

Performance Data Sheet .....11-12

California Certification ..... 13

Other Products from Watts Premier ..... 14

Warranty Registration ..... 15-16

Removing chlorine from your shower..... 17

Limited Warranty ..... 18

## Service Record

Model Number: \_\_\_\_\_ Serial Number: \_\_\_\_\_

Date of Purchase: \_\_\_\_\_ Date of Install: \_\_\_\_\_ Installed by: \_\_\_\_\_

Date	Sediment Filter (6 Months)	LCV Block (6 Months)		Date	Sediment Filter (6 Months)	LCV Block (6 Months)	

# Operational Parameters

Installation must comply with state and local plumbing regulations.

**Water supply line to the system must be from the cold water supply line.**

<b>Operating Temperatures:</b>	Maximum 100°F (37.8°C)	Minimum 40°F (4.4°C)
<b>Operating Pressure:</b>	Maximum 85 psi (6.0 kg/cm <sup>2</sup> )	Minimum 20 psi (1.406 kg/cm <sup>2</sup> )
<b>pH Parameters:</b>	Maximum 10	Minimum 5
<b>Flow Rate:</b>	0.5 GPM @ 60 psi	

## Contents of Under Counter System

- √ 1 WP-2 Unit
- √ 2 Filters - Installed
- √ 1 Parts Bag
- √ 1 Faucet Assembly


*If any of the items are missing, please contact Watts Premier prior to installing.*

## Tools Recommended For Installation

- √ 1/2 Diamond Tipped Hole Saw bit for faucet opening
- √ Phillips bit for electric drill
- √ 1/2" Open End Wrench
- √ 1/8" diamond tip bit, pilot hole
- √ Sharp Knife
- √ Electric Drill
- √ Phillips Screw Driver



## Part Number List

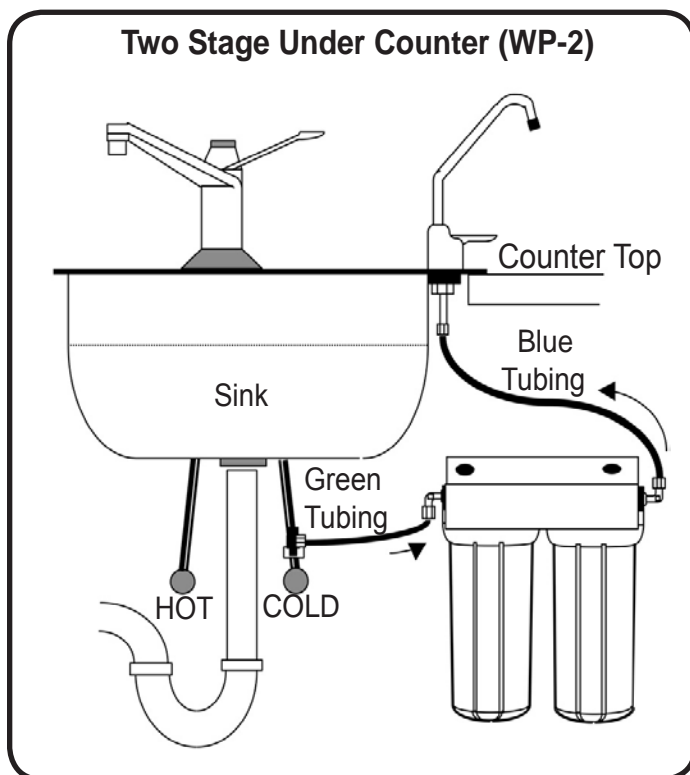

Item #	Part #	Description
1	137013	SYSTEM BRACKET
2	125034	COMPRESSION ELBOW 90 1/4"
3	560080	ADAPTA VALVE
4	116023	FAUCET-NON AG CHROME
5	610109	GREEN TUBING
6	610113	BLUE TUBING
7	104017	SEDIMENT FILTER
8	101014	LCV CB FILTER
9	113005	HOUSING LID 1/4" FPT
10	113021	HOUSING BOWL WHITE
11	199389	MANUAL
12	146001	MOUNTING SCREW

# Drill a Hole for the Faucet

## Marble Counter-top


*We recommend contacting a qualified contractor for drilling a hole in a marble counter-top.*

## Counter Top / Porcelain & Stainless Steel Sink

**Note:** *Most sinks are pre drilled with 1 ¼” diameter hole that you can use for your RO faucet. (If you are already using it for a sprayer or soap dispenser, see step 1)*

*Porcelain sinks are extremely hard and can crack or chip easily. Use extreme caution when drilling. Watts accepts no responsibility for damage resulting from the installation of faucet. Diamond tip bit recommended.*

Step 1 Determine desired location for the RO faucet on your sink and place a piece of masking tape over where the hole is to be drilled. Mark the center of the hole on the tape.



Step 2 Using a variable speed drill set on the slowest speed, drill a 1/8” pilot hole through both porcelain and metal casing of sink at the marked center of the desired location. Use lubricating oil or liquid soap to keep the drill bit cool (If drill bit gets hot it may cause the porcelain to crack or chip).

Step 3 Using a 1/2” diamond tip hole saw, proceed to drill the hole. Keep drill speed on the slowest speed and use lubricating oil or liquid soap to keep the hole saw cool during cutting.



Step 4 After drilling, remove all sharp edges and make sure the surroundings of the sink are cooled before mounting the faucet.

## Mounting System Under Sink

Step 5 Locate an area best fitted for mounting the system. Allow approximately 2” (5cm) clearance between the bottom of the filter housing and the floor of the sink cabinet.






Step 6 Using the mounting holes on the bracket, mark the location for the mounting screws on the cabinet wall under the sink.

Step 7 Screw the (2) self tapping screws into the wall at the marked location. Hang the module on the screws using the mounting holes in the bracket.

# Faucet Installation

Choose the configuration that matches your faucet:

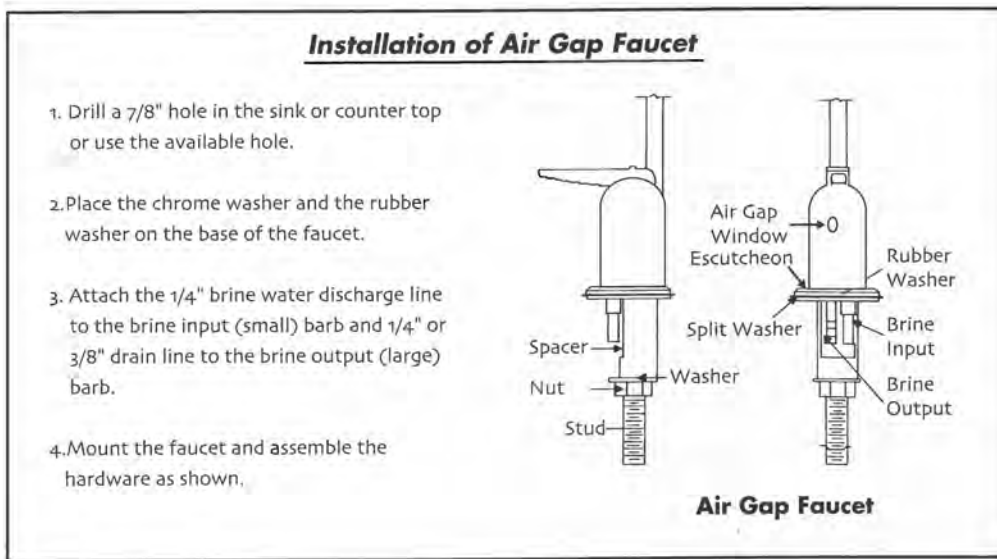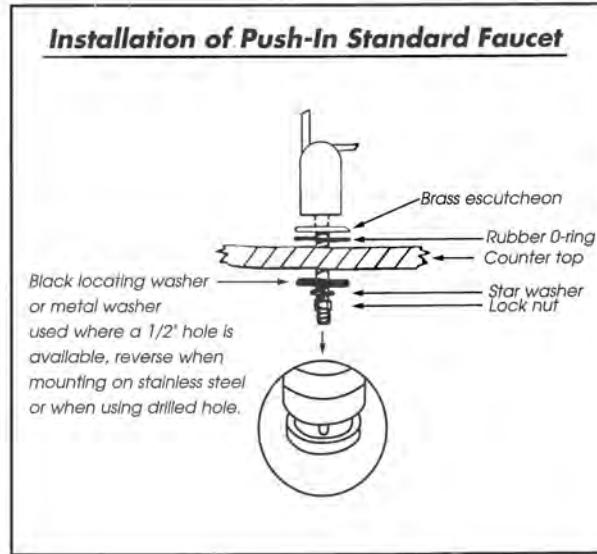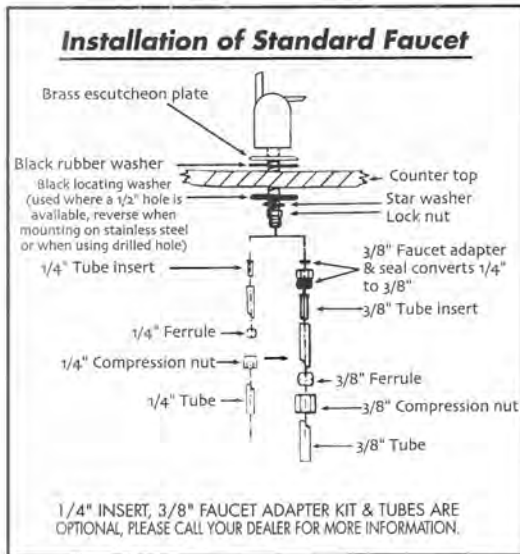


## Connect Blue Tube from the RO to the Faucet

Step 8 Locate the blue 1/4" tube attached to the filtration system. Remove a brass nut, plastic sleeve and brass insert from the parts bag. To assemble, place the brass nut on the blue tube first, then the sleeve (small tapered end of sleeve must point to the end of tube) and then push the insert all the way into the end of the tube. (See Picture)



Step 9 Insert the blue tube into the end of the faucet shank and use a wrench to tighten the brass nut securely.





# Adapt-a-Valve Installation

**Caution:** Water supply line to the system must be from the cold water supply line only.  
Hot water will severely damage your system.

## Verify contents prior to installation:

- ( 1 ) - Plastic Adapt-a-Valve with black collet
- ( 1 ) - Brass Adapter no washer
- ( 1 ) - Brass Adapter with black washer
- ( 1 ) - White rubber washer




3/8" Configuration  
(With Brass Fittings)  
\* Insert White Washer



Hot Supply Cold Supply



1/2" Configuration  
(Without Brass Fittings)

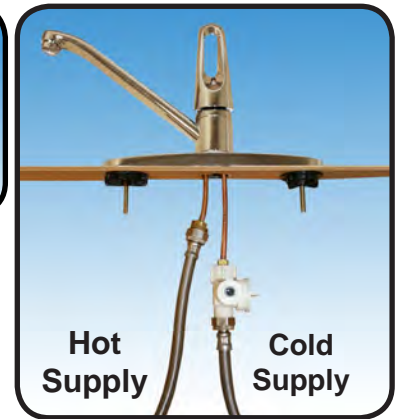

Hot Supply Cold Supply

**WARNING:** Do not use Teflon tape with the Adapt-a-Valve.


Step 10 Turn off the cold water supply to the faucet by turning the angle stop valve completely off. Open cold water sink faucet to relieve pressure.

Step 11 Choosing the configuration that fits your plumbing, attach the adapt-a-valve as illustrated in the four photos above.

**TIPS:** Make sure that the black collet is installed in to the 1/4" opening on the Adapt-a-valve.  
Don't forget to install the white compression washer with the 3/8" configuration.  
Brass adapter (A) does not need to be tightened with a wrench, only finger tight.

## Green Tube Connection - Feed Water

Step 12 Locate the 1/4" Green tube attached to the filtration system. Insert the open end of the green 1/4" tube into the open 1/4" quick connect fitting on the plastic water feed valve making sure the tube is pushed in all the way to the tube stop.

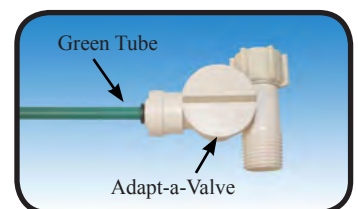



# ***Congratulations!***

**You have completed the installation of new your Reverse Osmosis system.**

**Please Follow the Startup Instructions.**

## **Start up Instructions**

Step 1 Turn on water supply at angle stop and open the Adapt-a-Valve. Turn faucet handle to the open position to start the flow of water through the unit. Run 3 gallons of water through the unit in order to flush out the normal black carbon fines (it will “sputter” until the air is purged out) from the unit. Initially, the water may appear cloudy which is due to tiny air bubbles and it will clear up shortly. Close the faucet when finished.



Step 2 Check for leaks. If you have any leaks, shut off the water supply to your system, tighten any fittings / housings and restart unit.

***(Check frequently over the next 24 hours to ensure no leaks are present)***

## Filter Change

Watts Premier recommends changing the filter element every 6 months. However filter life may vary depending on local water conditions and water use.

**Use Watts Premier's replacement cartridge only.** Other filters may look the same, but only filters by Watts are manufactured to fit your WP-2 filter unit in order to ensure proper reduction of water contaminants.

Sediment Pre-Filter

Part# 104017

Carbon Block Filter

Part# 101014

(A) Turn off incoming water supply to the WP-2 unit.

Note: There will be water in the filter housing. Lift the faucet handle to relieve the water pressure.

(B) Remove filter housing from lid by turning it to the left, as shown in Figure D.

(C) Remove used filter cartridge and discard.

**NOTE: Do not discard filter-housing o-ring.**

(D) Clean inside of filter housing with warm soapy water and rinse well to remove soap.


(E) Lubricate o-ring with water-soluble lubricant (i.e. K-Y Jelly®).

**NOTE: Do not use Petroleum based lubricants such as Vaseline®.**

(F) Seat o-ring in groove in filter housing and insert new filter cartridges into appropriate filter housing.

(G) Screw filter housing onto lid as shown in Figure D.

(H) Turn on water supply to filter unit and check system for leaks periodically over the next 24-48 hours.

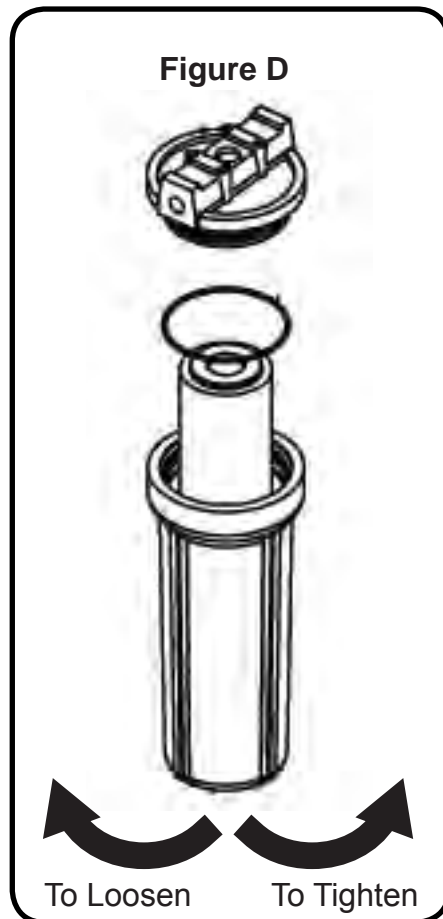

**Performance Data Sheet**  
**Watts Premier Inc.**  
**8716 W Ludlow Drive Suite #1**  
**Peoria, AZ 85381**  
**WP-2 LCV**

**GENERAL USE CONDITIONS:**

1: System to be used with municipal or well water sources treated and tested on regular basis to insure bacteriological safe quality. DO NOT use with water that is micro biologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected waters that may contain filterable cysts.

- 2: Operating Temperature: **Maximum 100° F (40.5° C) Minimum 40° F (4.4° C)**  
3: Operating Water Pressure: **Maximum 85-psi (5.98 kg/cm<sup>2</sup>) Minimum 20-psi**  
4: Maximum flow Rate: **0.50 gpm (1.89 lpm)**  
5: Rated Capacity: **600 Gallons (2,200 liters)**

**RECOMMENDED REPLACEMENT PARTS AND CHANGE INTERVAL:**

Note: Depending on incoming feed water conditions replacement time frame may vary.

Description	Part Number	Change time Frame	Cost
Stage 1: Sediment: 5M-10	104017	6 Months or 600 gallons of water	\$ 3.50*
Stage 2: Carbon block	101014	6 Months or 600 gallons of water	\$28.95*

**\*All prices subject to change without notice**

This system has been tested according to NSF/ANSI Standard 53 for the reduction of the substances listed below. The concentration of the indicated substances in water entering the system was reduced to a concentration less than or equal to the permissible limit for water leaving the system, as specified in NSF/ANSI 53. Testing performed under standard laboratory conditions, actual performance may vary.

California Proposition 65 Warning

WARNING: this product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

(Installer: California law requires that this warning be given to the consumer). For more information: [www.wattsind.com/prop65](http://www.wattsind.com/prop65).

Substance	Percent Reduction	Influent Challenge Concentration (mg/L unless noted)	Maximum Permissible Product Water Concentration
ALACHLOR*	>98%	0.04 +/- 0.10	0.002
ATRAZINE*	>97%	0.009 +/- 0.10	0.003
BENZENE*	>99%	0.015 +/- 0.10	0.005
BROMODICHLOROMETHANE (TTHM)*	>99.8%	0.300 +/- 0.30	0.015
BROMOFORM (TTHM)*	>99.8%	0.300 +/- 0.30	0.015
CARBOFURAN (Furadan)*	>99%	0.08 +/- 0.10	0.04
CARBON TETRACHLORIDE*	98%	0.015 +/- 0.10	0.005
CHLORDANE		0.04 +/- 0.10	0.002
CHLOROBENZENE (Monochlorobenzene)*	>99%	2.0 +/- 0.10	0.1
CHLOROFORM (TTHM)*	>99.8%	0.300 +/- 0.30	0.015
CRYPTOSPORIDIUM (see Cyst)	99.99%	minimum 50,000/mL	99.95%
CYST	99.99%	minimum 50,000/mL	99.95%
2, 4-D*	98%	0.210 +/- 0.10	0.07
DBCP (see Dibromochloropropane)*	>99%	0.052	0.00002
1,2-DCA (see 1,2-DICHLOROETHANE)*	95%	0.088	0.0048
1,1-DCE (see 1,1-DICHLOROETHYLENE)*	>99%	0.083	0.001
DIBROMOCHLOROMETHANE (TTHM;Chlorodibromomethane)*	>99.8%	0.300 +/- 0.30	0.015
DIBROMOCHLOROPROPANE (DBCP)*	>99%	0.004 +/- 0.10	0.0002
o-DICHLOROENZENE (1,2 Dichlorobenzene)*	>99%	1.8 +/- 0.10	0.6
p-DICHLOROENZENE (para-Dichlorobenzene)*	>98%	0.225 +/- 0.10	0.075
1,2-DICHLOROETHANE (1,2-DCA)*	95%	0.015 +/- 0.10	0.005
1,1-DICHLOROETHYLENE (1,1-DCE)*	>99%	0.021 +/- 0.10	.007
CIS-1,2-DICHLOROETHYLENE*	>99%	1.4 +/- 0.10	0.07
TRANS-1,2- DICHLOROETHYLENE*	>99%	2.0 +/- 0.10	0.1
1,2-DICHLOROPROPANE (Propylene Dichloride)*	>99%	0.015 +/- 0.10	0.005
CIS-1,3- DICHLOROPROPYLENE*	>99%	0.079	0.001
DINOSEB*	99%	0.021 +/- 0.10	0.007
EDB (see ETHYLENE DIBROMIDE)*	>99%	0.044	0.00002
ENDRIN*	99%	0.006 +/- 0.10	0.002

Substance	Percent Reduction	Influent Challenge Concentration (mg/L unless noted)	Maximum Permissible Product Water Concentration
ENTAMOEBIA	99.99%	minimum 50,000/mL	99.95%
ETHYLBENZENE*	>99%	2.1 +/- 0.10	0.7
ETHYLENE DIBROMIDE (EDB)*	>99%	0.001 +/- 0.10	0.00005
FURADAN (see CARBOFURAN)*	>99%	0.19	0.001
HALOACETONITRILES (HAN)*			
BROMOCHLOROACETONITRILE	98%	0.022	0.0005
DIBROMOACETONITRILE	98%	0.024	0.0006
DICHLOROACETONITRILE	98%	0.0096	0.0002
TRICHLOROACETONITRILE	98%	0.015	0.0003
HALOKETONES (HK):*			
1,1-DICHLORO-2-PROPANONE	99%	0.0072	0.0001
1,1,1-TRICHLORO-2-PROPANONE	96%	0.0082	0.0003
GIARDIA LAMBLIA (see Cyst)	99.99%	minimum 50,000/mL	99.95%
HEPTACHLOR*	>99%	0.25	0.00001
HEPTACHLOR EPOXIDE*	98%	0.0107	0.0002
HEXACHLOROBUTADIENE (Perchlorobutadiene)*	>98%	0.044	0.001
HEXACHLOROCYCLOPENTADIENE*	>99%	0.060	0.000002
LEAD pH 6.5	99%	0.15 +/- 10%	0.010
LEAD pH 8.5	99%	0.15 +/- 10%	0.010
HEPTACHLOR (H-34, HEPTOX)		0.08 +/- 0.10	0.0004
HEPTACHLOR EPOXIDE		0.004 +/- 0.10	0.0002
HEXACHLOROCYCLOPENTADI		0.15 +/- 0.10	0.05
LINDANE*	>99%	0.002 +/- 0.10	0.0002
METHOXYCHLOR*	>99%	0.12 +/- 0.10	0.04
METHYLBENZENE (see TOLUENE)*	>99%	0.015 +/- 0.20	0.005
MONOCHLOROENZENE (see CHLOROENZENE)*	>99%	0.077	0.001
PCE (see TETRACHLOROETHYLENE)*	>99%	0.081	0.001
PENTACHLOROPHENOL*	>99%	0.01 +/- 0.10	0.001
PERCHLOROBUTADIENE (see HEXACHLOROBUTADIENE)*	>98%	0.044	0.001
PROPYLENE DICHLORIDE (see 1,2-DICHLOROPROPANE)*	>99%	0.080	0.001
POLYCHLORINATED BIPHENYLS (PCBs, Aroclor 1260)		0.01 +/- 0.10	0.0005
SIMAZINE*	>97%	0.012 +/- 0.10	0.004
SILVEX (see 2,4,5-TP)*	99%	0.270	0.0016
STYRENE (Vinylbenzene)*	>99%	2.0 +/- 0.10	0.1
1,1,1-TCA (see 1,1,1-TRICHLOROETHANE)*	95%	0.084	0.0046
TCE (see TRICHLOROETHYLENE)*	>99%	0.180	0.0010
1,1,1,2-TETRACHLOROETHANE*	>99%	0.081	0.001
TETRACHLOROETHYLENE*	>99%	0.015 +/- 0.10	0.005
TOLUENE (Methylbenzene)*	>99%	3.0 +/- 0.10	1
TOXOPLASMA		minimum 50,000/mL	99.95%
2,4,5-TP (Silvex)*	99%	0.15 +/- 0.10	0.05
TRIBROMOACETIC ACID*		0.042	0.001
TOXAPHENE		0.015 +/- 0.10	0.003
1,2,4 TRICHLOROENZENE (Unsymtrichlorobenzene)*	>99%	0.21 +/- 0.10	0.07
1,1,1-TRICHLOROETHANE (1,1,1-TCA)*	95%	0.6 +/- 0.10	0.2
1,1,2-TRICHLOROETHANE*	>99%	0.015 +/- 0.10	0.005
TRICHLOROETHYLENE (TCE)*	>99%	0.300 +/- 0.10	0.005
TRIHALOMETHANES (THM) (Chloroform; Bromoform; Bromodichloromethane; Dibromochloromethane)	>99.8%	0.45 +/- 0.20	0.080
Unsym-Trichlorobenzene (see 1,2,4-TRICHLOROENZENE)*	>99%	0.160	0.0005
Vinylbenzene (see STYRENE)*	>99%	0.150	0.0005
XYLENES	>99%	30 +/- 0.10	10

State of California  
 Department of Health Services  
 Water Treatment Device  
 Certificate Number  
 05 - 1728

Date Issued: August 17, 2005

**Trademark/Model Designation**

WP-1-LCV

WP-2-LCV

**Replacement Element(s)**

Sediment Pre-filter: 104023

Lead, Cysts, VOC Filter: #101014

Lead, Cysts, VOC Filter: #101014

Sediment Pre-filter: 104023

Lead, Cysts, VOC Filter: #101014

Lead, Cysts, VOC Filter: #101014

**Manufacturer:** Watts Premier

The water treatment device(s) listed on this certificate have met the testing requirements pursuant to Section 116830 of the Health and Safety Code for the following health related contaminants:

**Microbiological Contaminants and Turbidity**

Cysts

**Organic Contaminants**

VOCs

Alachlor  
 Atrazine  
 Benzene  
 Carbofuran  
 Carbon Tetrachloride  
 Chlorobenzene  
 Chloropicrin  
 2,4-D  
 DBCP  
 o-Dichlorobenzene  
 p-Dichlorobenzene  
 1,2-Dichloroethane  
 1,1-Dichloroethylene  
 cis-1,2-Dichloroethylene  
 trans-1,2-Dichloroethylene  
 1,2-Dichloropropane  
 cis-1,3-Dichloropropylene  
 Dinoseb

**Inorganic/Radiological Contaminants**

Lead

Endrin  
 Ethylbenzene  
 EDB  
 Haloacetonitriles (HAN)  
 Bromochloroacetonitrile  
 Dibromoacetonitrile  
 Dichloroacetonitrile  
 Trichloroacetonitrile  
 Haloketones (HK)  
 1,1-Dichloro-2-Propanone  
 1,1,1-Trichloro-2-Propanone  
 Heptachlor  
 Heptachlor Epoxide  
 Hexachlorobutadiene  
 Hexachlorocyclopentadiene  
 Lindane  
 Methoxychlor  
 Pentachlorophenol

Simazine  
 Styrene  
 1,1,2,2-Tetrachloroethane  
 Tetrachloroethylene  
 Toluene  
 2,4,5-TP (Silvex)  
 Tribromoacetic Acid  
 1,2,4-Trichlorobenzene  
 1,1,1-Trichloroethane  
 1,1,2-Trichloroethane  
 Trichloroethylene  
 Trihalomethanes (THMs)  
 Bromodichloromethane  
 Bromoform  
 Chloroform  
 Chlorodibromomethane  
 Xylenes

**Rated Service Capacity:** 600 gal

**Rated Service Flow:** 0.5 gpm

**Do not use where water is microbiologically unsafe or with water of unknown quality, except that systems certified for cyst reduction may be used on disinfected waters that may contain filterable cysts.**

## Other Products from Watts Premier

Watts Premier has other fine water filtration products and accessories to enhance your water and to compliment your water filtration system. Listed on this page are only a few of the items we offer. Visit our web site at [www.wattspremier.com](http://www.wattspremier.com) or call our Customer Service Representatives at 1-800-752-5582 (inside USA) 1-480-675-7995 (outside USA) for more products.



**Watts Premier Ice Maker Filter Kit** - High efficiency replaceable filter that can last up to 5 years or 20,000 gallons. Perfect for residential and commercial ice makers as well as refrigerators, drinking fountains, coffee & tea brewers, motor homes and campers. Reduces chlorine taste and odor.

**Part No. 500327**

**\*\$36.95/ea**



### **Whole House Filter**

Great for sediment problems such as in well water supply or areas where dirt and rust particles are a problem. Includes three 50 micron sediment filters and wrench

(3/4" ports)

**Part No. 500223**

**\*\$42.95/ea**

### **Replacement filter**

**Part No. 304007**

**\*\$ 4.50/ea**



### **Watts Premier Hot Water Recirculation System**

Bring convenience and savings to your home, giving you hot water instantly at every faucet, when you need it. This unique product is easy to install and not only provides you with the convenience of hot water when you need it, but saves an average of over 15,000 gallons per year.

**Part No. 500800**

**\*\$229.99/ea**



### **Water Pressure Gauge**

This gauge mounts onto your outside hose connection to accurately show your home's water pressure up to 300 psi. A red needle shows peak overnight pressure, which may exceed readings during the day. High pressure readings may indicate the need for pressure regulator to prevent damage to appliances.

**Part No. 261003**

**\*\$14.95 each**



### **One Piece Manifold 5-Stage Reverse Osmosis WP-5**

This state of the art manifold reverse osmosis system provides a seamless water path eliminating 17 connections from standard style units. Includes carbon block technology and high production 24gpd Thin Film Membrane - NSF Certified for the reduction of a wide range of contaminants including: Arsenic, Chromium, Perchlorate, Lead, Radium, and many others.

**Part No. 500023**

**\*\$239.00/ea**

***\*All prices subject to change without notice.***









# Removing chlorine from your shower

**Special Chlorgon & KDF media – More effective than carbon medias with hot water applications in the removal of the following.**

- √ Free Chlorine (CL-)
- √ Combined Chlorine (Sodium Hypochlorite)
- √ Hydrogen Sulfide (Rotten egg smell)
- √ Plus, its pH balanced.
- √ Iron oxide (rust water)
- √ Dirt, sediment
- √ Odors



## Deluxe Shower Handle with Built in Filter

5-Way Massaging Spray  
72" Reinforced Hose  
High Strength Bracket  
Triple Plated Finish  
Reversible Filter Cartridge (Model HHC)  
Cartridge Life Rating: 3 months

<b>Part No. 107070</b>	<b>WHITE</b>	<b>*\$38.95</b>
<b>Part No. 107091</b>	<b>CHROME</b>	<b>*\$44.95</b>
<b>Part No. 107092</b>	<b>GOLD</b>	<b>*\$44.95</b>

## Replacement filters 2PK



Part No. 107075 **\*\$15.95/pk**



## Shower Falls Deluxe Shower Handle with Built in Filter

Curved Ergonomic Shower Handle  
Filter Handle Extension  
Dual Swivel Adjustment  
Ultra Deluxe 5 Way Massaging Spray  
72" Reinforced Hose  
Chrome Plated Brass Bracket & Swivel Ball Extension  
Triple Plated Finish  
Reversible Filter Cartridge (Model HHC)  
Cartridge Life Rating: 3 months

**Part No. 107095 CHROME \*\$55.95**

## Replacement filters 2PK



Part No. 107075 **\*\$15.95/pk**



## All-In-One reversible High-Flow Filter

### Deluxe 5-Way Massaging Spray

Soft-Touch Adjustment Pads  
Anti-Scaling Spray Nozzle  
High Strength Housing  
Triple Plated Finish  
Cartridge Life Rating: 6 months

**Part No. 107098 White/Chrome \*\$39.95**

## Replacement filter



Part No. 107080 **\*\$13.95/ea**

**\*All prices subject to change without notice.**



8716 W Ludlow Drive Suite #1 Peoria, AZ 85381  
**Limited Warranty**

**What your Warranty Covers:**

If any part of your WATTS PREMIER WP-2 is defective in workmanship (excluding replaceable filters ), return unit after obtaining a return authorization (see below), within 3 years of original retail purchase, WATTS PREMIER will repair or, at WATTS PREMIER'S option, replace the system at no charge.

**How to obtain Warranty Service:**

For warranty service, call 1-800-752-5582 for a return authorization number. Then, ship your unit to our factory, freight and insurance prepaid, with proof of date of original purchase. Please include a note stating the problem. Premier will repair it, or replace it, and ship it back to you prepaid.

**What this warranty does not cover:**

This warranty does not cover defects resulting from improper installation, (contrary to WATTS PREMIER'S printed instructions), from abuse, misuse, misapplication, improper maintenance, neglect, alteration, accidents, casualties, fire, flood, freezing, environmental factors, water pressure spikes or other such acts of God.

This warranty will be void if defects occur due to failure to observe the following conditions:

1. The WP-2 System must be hooked up to a potable municipal or well cold water supply.
2. The pH of the water must not be lower than 5 or higher than 10.
3. The incoming water pressure must be between 20 and 85 pounds per square inch.
4. Incoming water to the Counter Top cannot exceed 100 degrees F (38 degrees C.)

This warranty does not cover any equipment that is relocated from the site of its original installation.

This warranty does not cover any charges incurred due to professional installation.

This warranty does not cover any equipment that is installed or used outside the United States of America and Canada.

**LIMITATIONS AND EXCLUSIONS:**

WATTS PREMIER WILL NOT BE RESPONSIBLE FOR ANY IMPLIED WARRANTIES, INCLUDING THOSE OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. WATTS PREMIER WILL NOT BE RESPONSIBLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES, INCLUDING TRAVEL EXPENSE, TELEPHONE CHARGES, LOSS OF REVENUE, LOSS OF TIME, INCONVENIENCE, LOSS OF USE OF THE EQUIPMENT, AND DAMAGE CAUSED BY THIS EQUIPMENT AND ITS FAILURE TO FUNCTION PROPERLY. THIS WARRANTY SETS FORTH ALL OF PREMIER'S RESPONSIBILITIES REGARDING THIS EQUIPMENT.

**OTHER CONDITIONS:**

If WATTS PREMIER chooses to replace the equipment, WATTS PREMIER may replace it with reconditioned equipment. Parts used in repairing or replacing the equipment will be warranted for 90 days from the date the equipment is returned to you or for the remainder of the original warranty period, whichever is longer. This warranty is not assignable or transferable.

**YOUR RIGHTS UNDER STATE LAW:**

Some states do not allow limitations on how long an implied warranty lasts, and some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply. This warranty gives you specific legal rights, and you may have other legal rights which vary from state to state.