


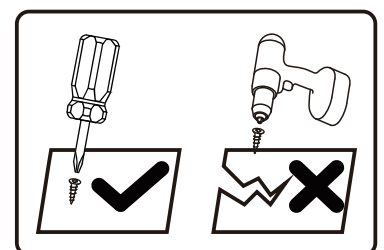

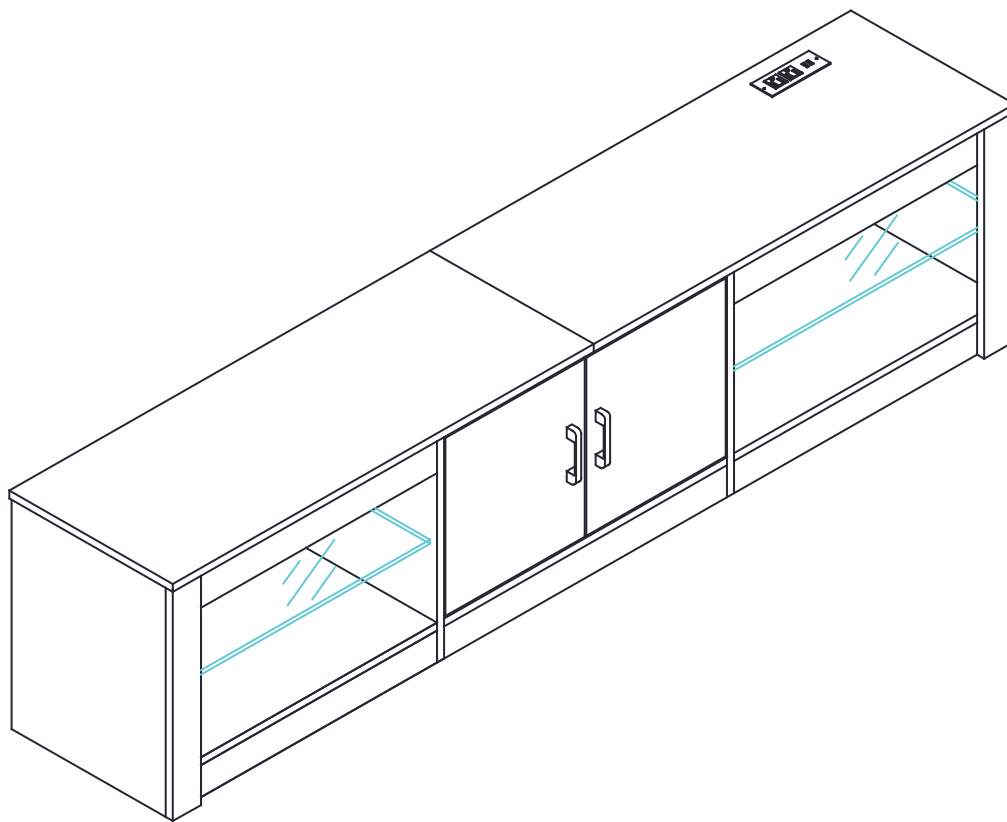
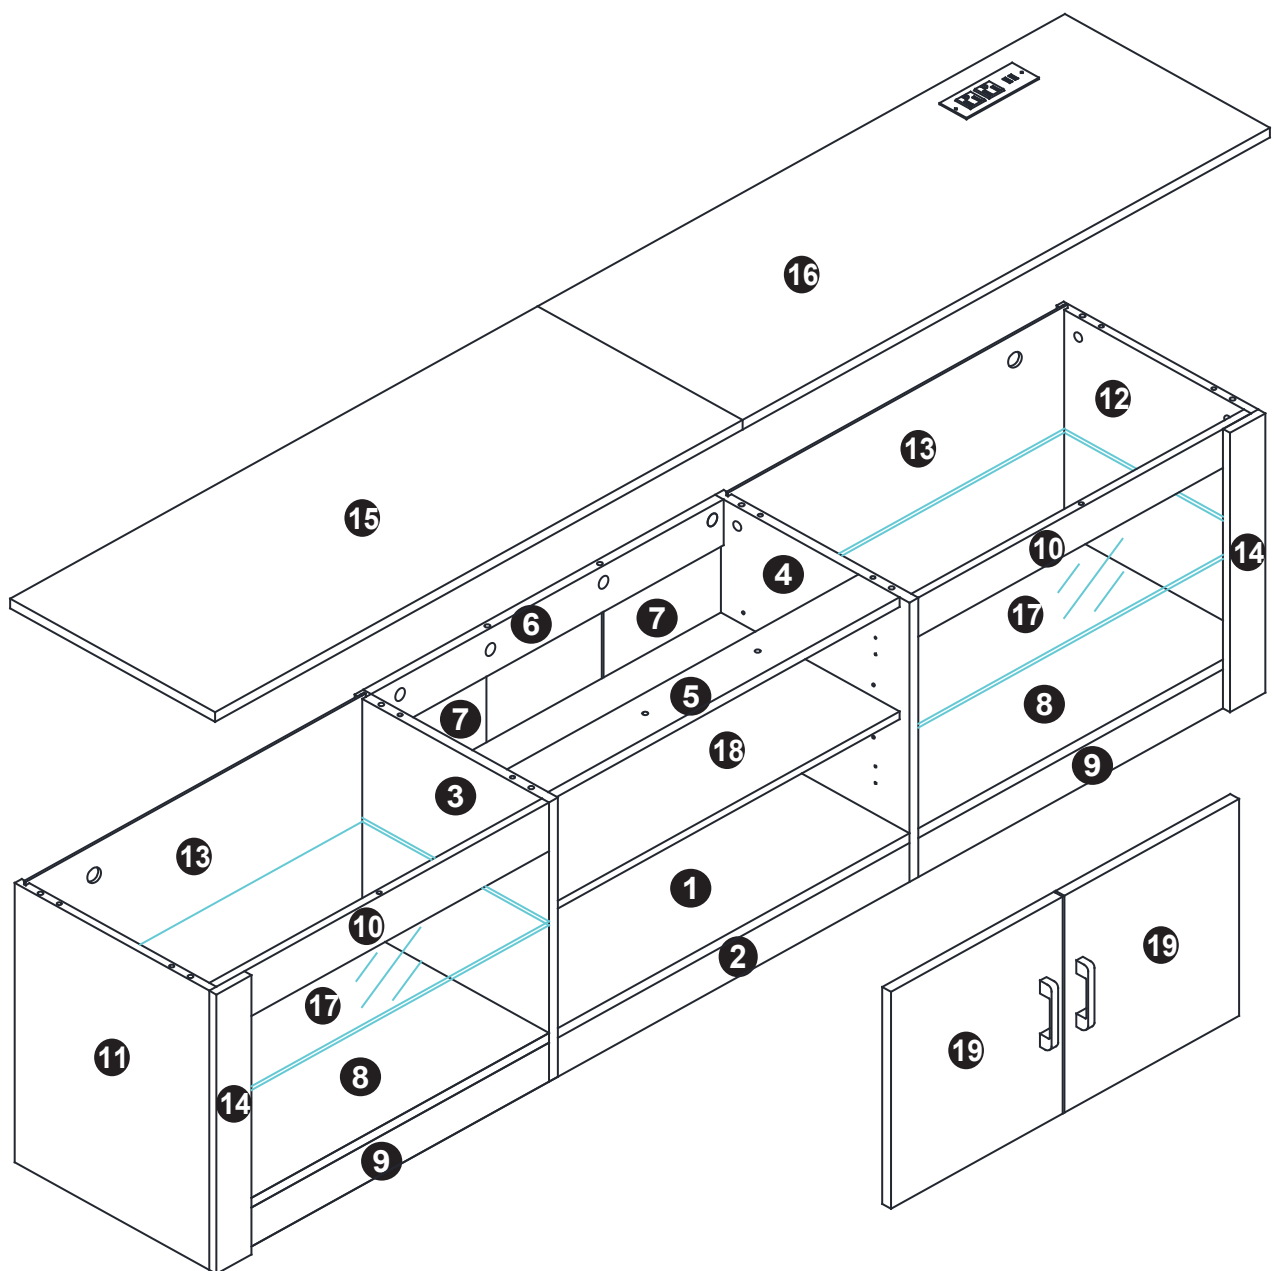




Owner Manual




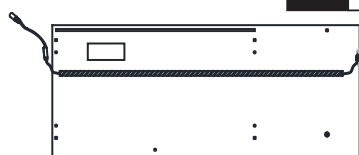

**1** x01**2** x02**3** x01**4** x01**5** x01**6** x01**7** x02**8** x02**9** x04**10** x02**11** x01**12** x01**13** x02**14** x02**15** x01**16** x01**17** x02**18** x01**19** x02



A x52
Ø7*29
+1 (spare)




B x34
Ø6*30
+1 (spare)



C x52
Ø15*10
+1 (spare)



D x12
Ø8*23



F x04
Ø35



G x24
M4*14
+2 (spare)



Y x02
M6*25





T x02
L105*22




U x04
M4*18



X x02
M3*16

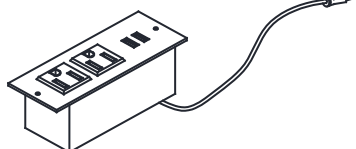

V x01












O x01

A x28


B x12

A x14

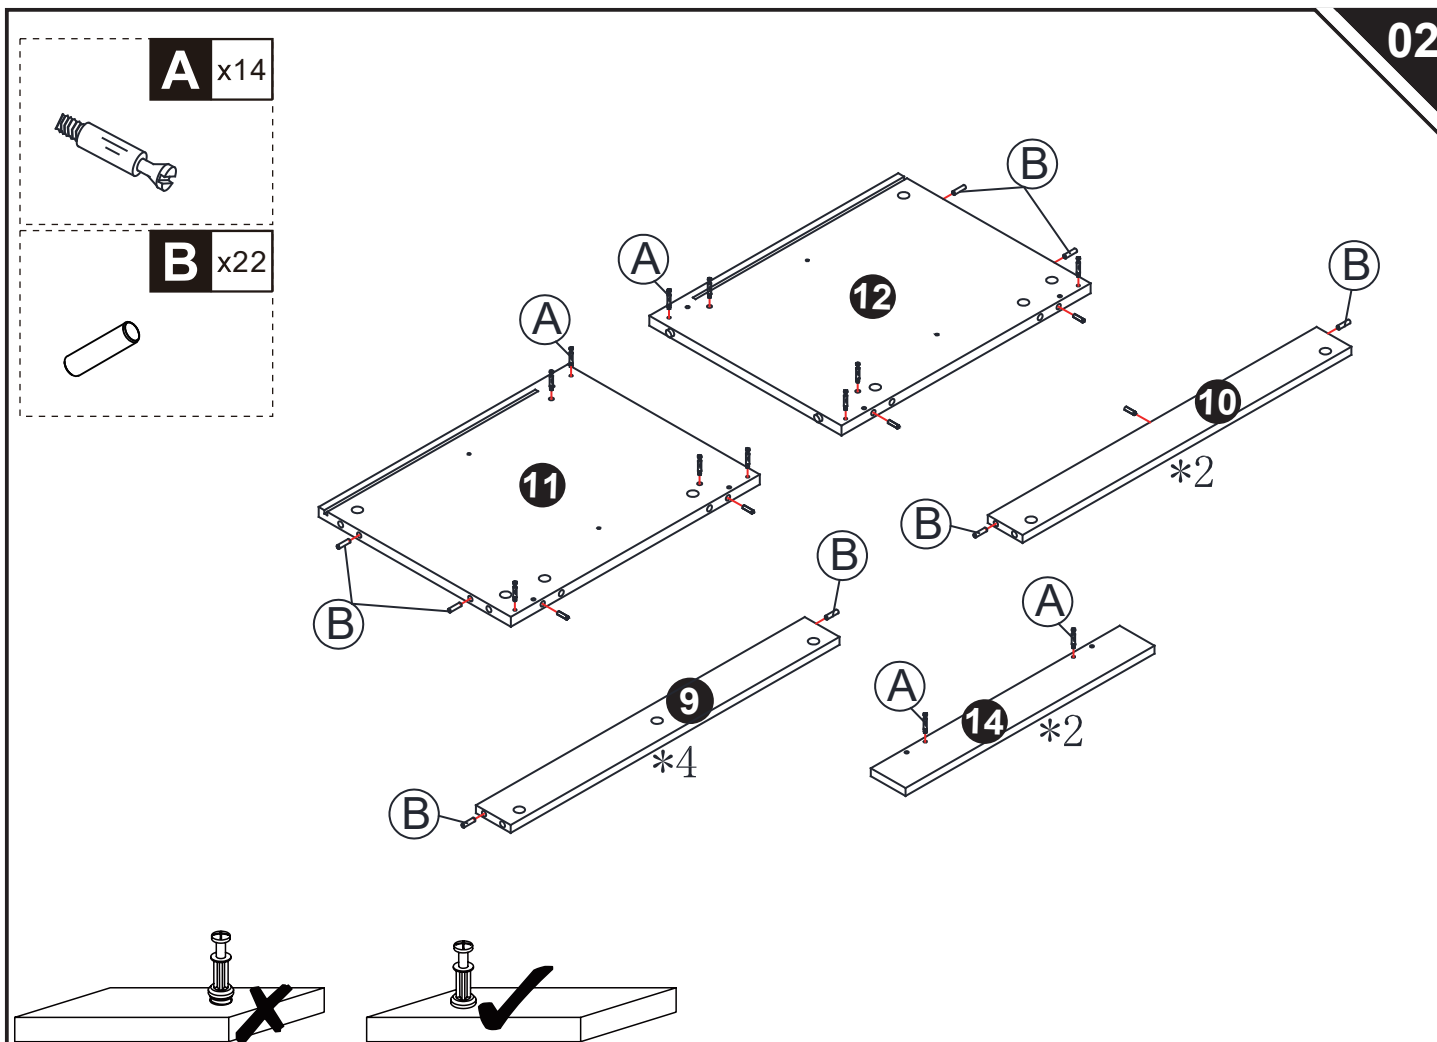
B x22

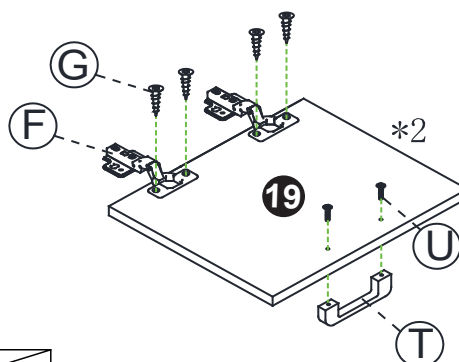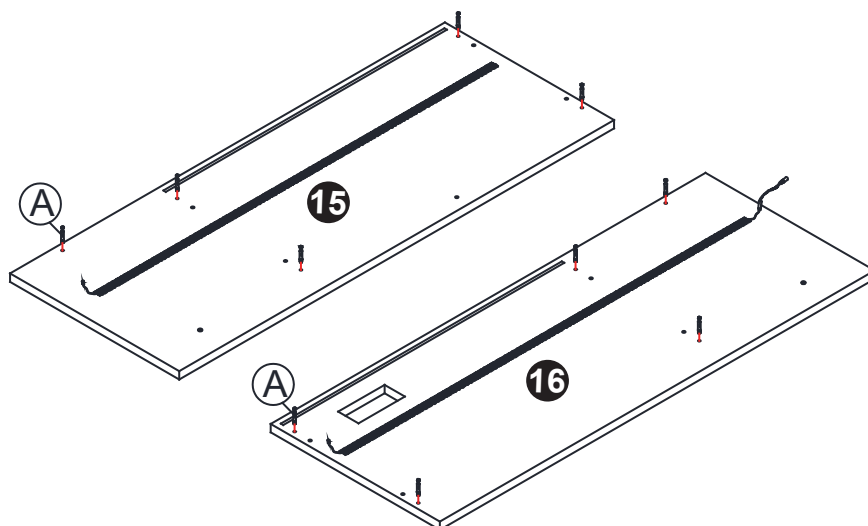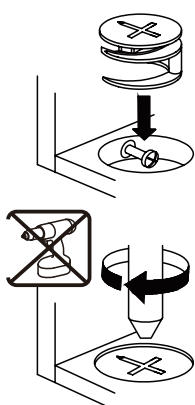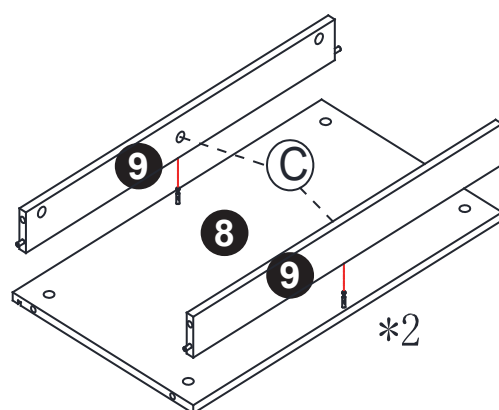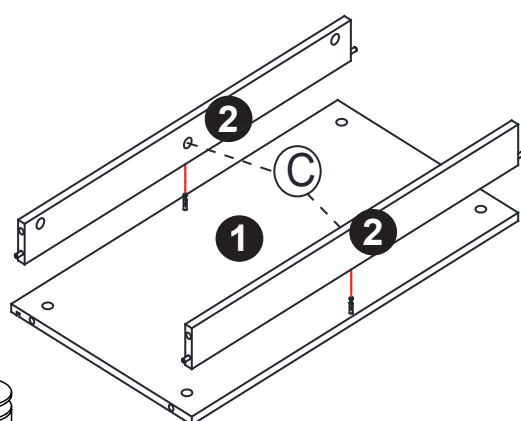F x04**G** x08**U** x04**T** x02**C** x06


C x12

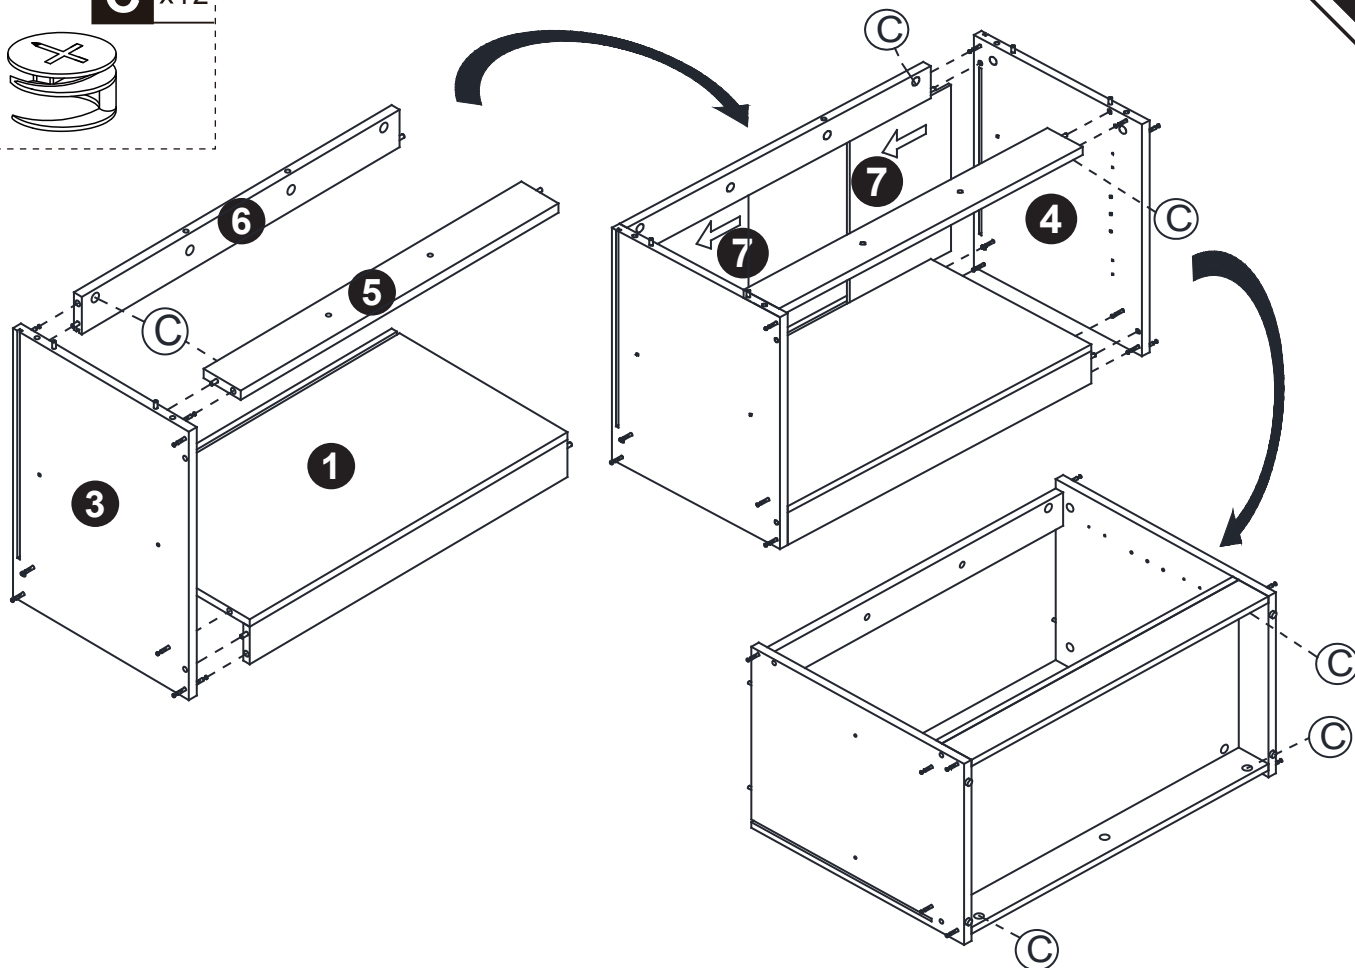


C x20


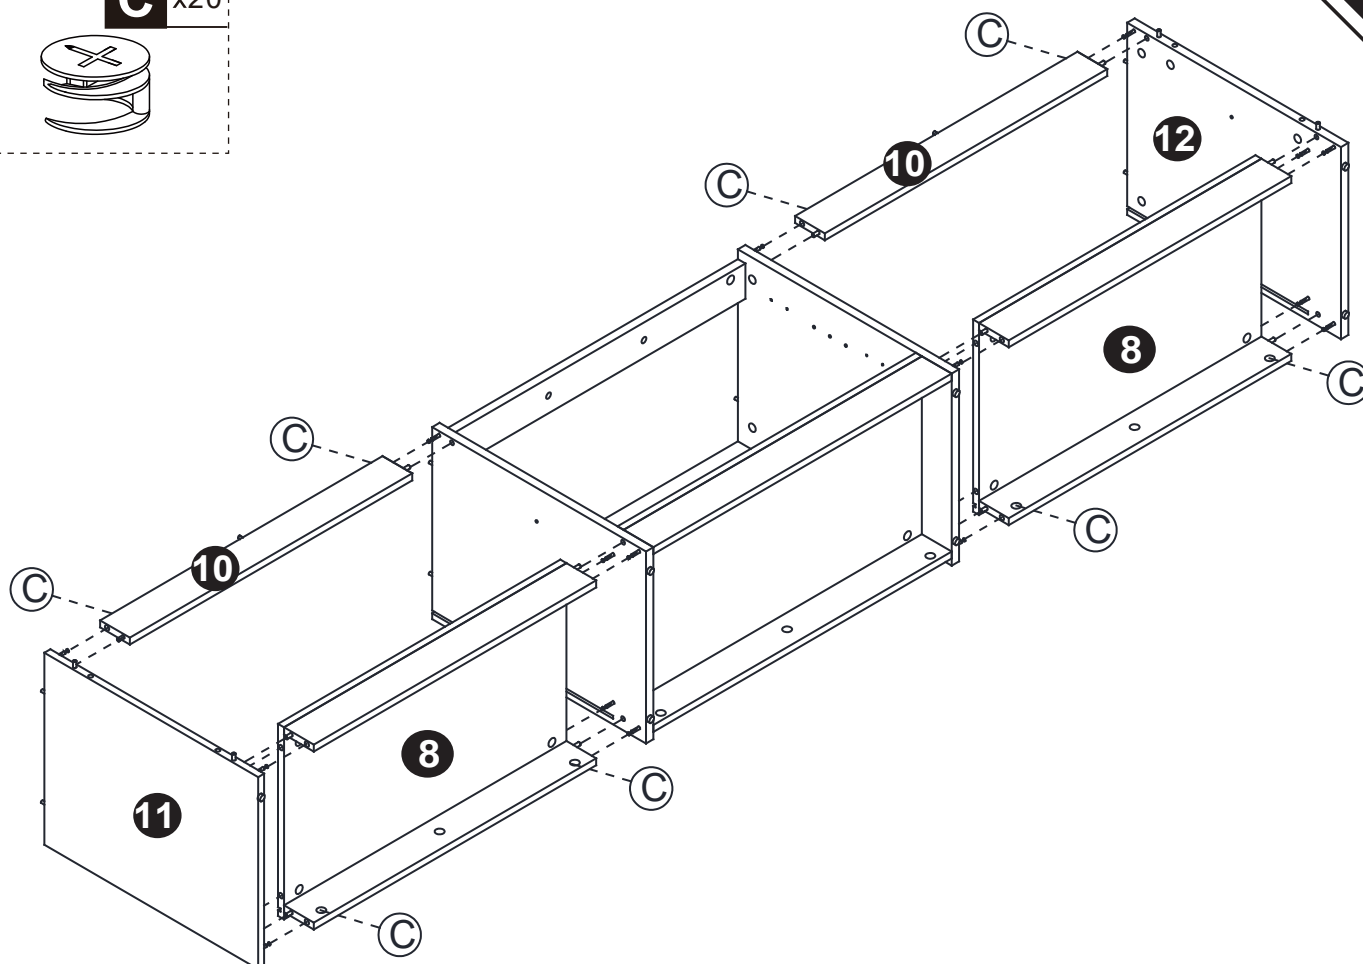


07







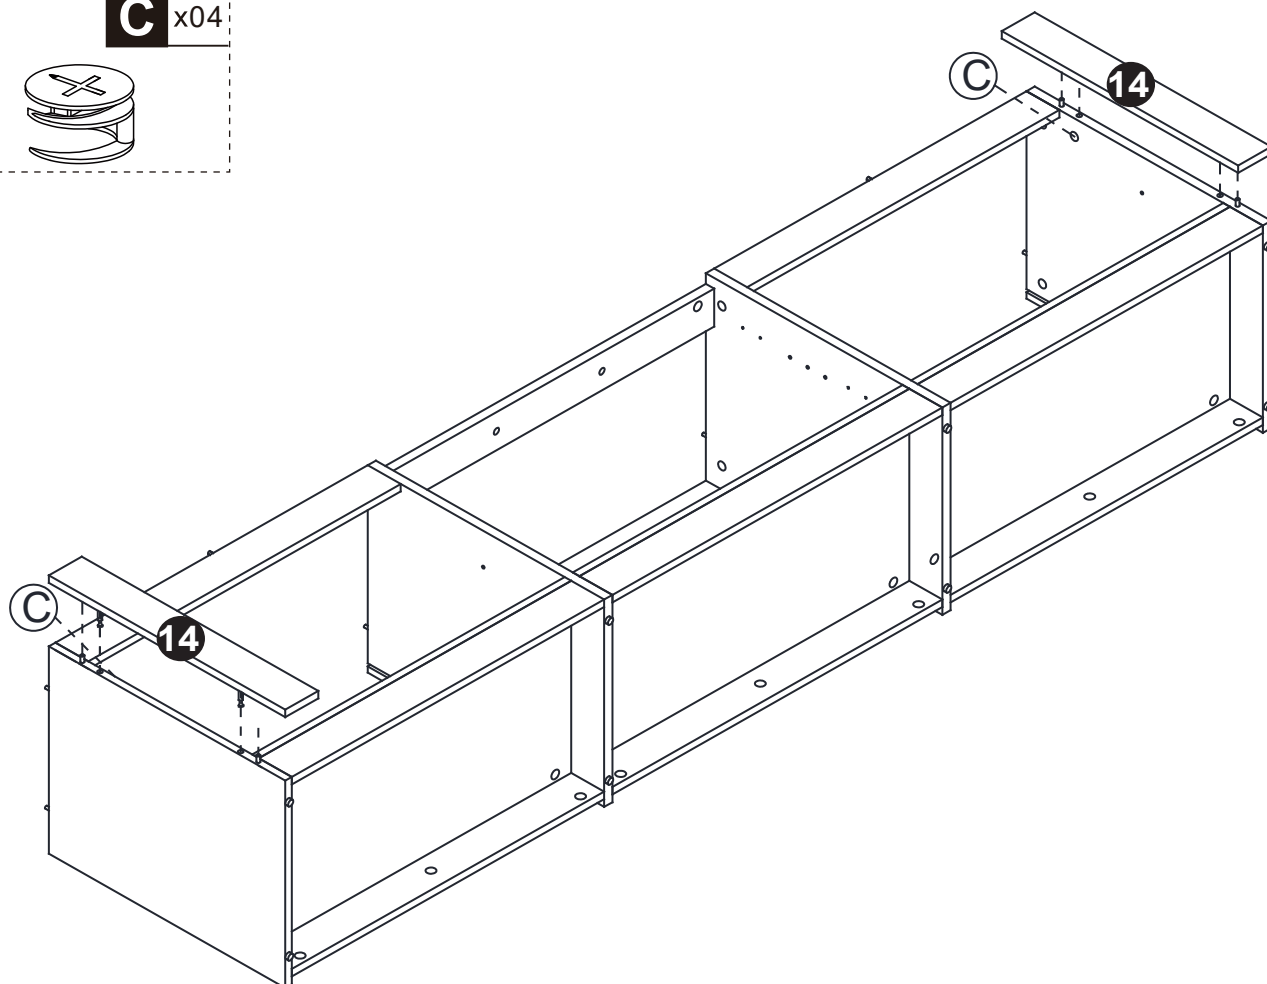
C x04

08

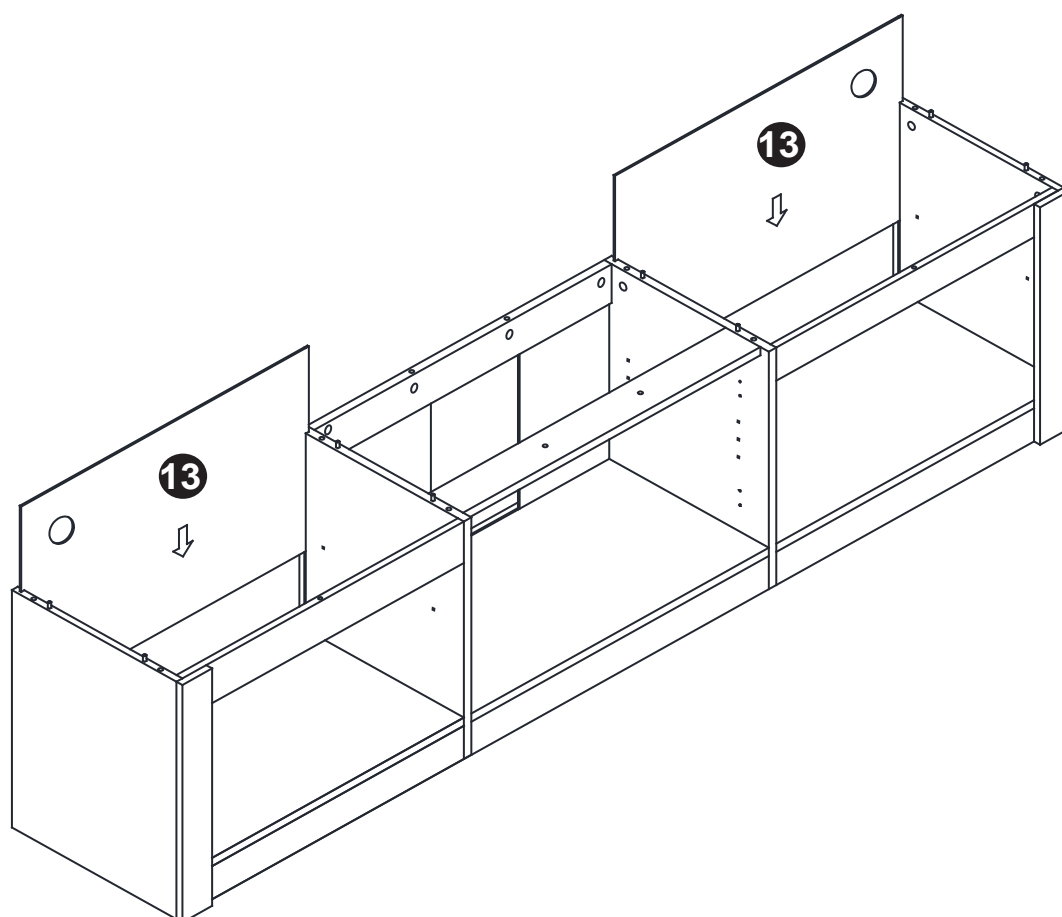

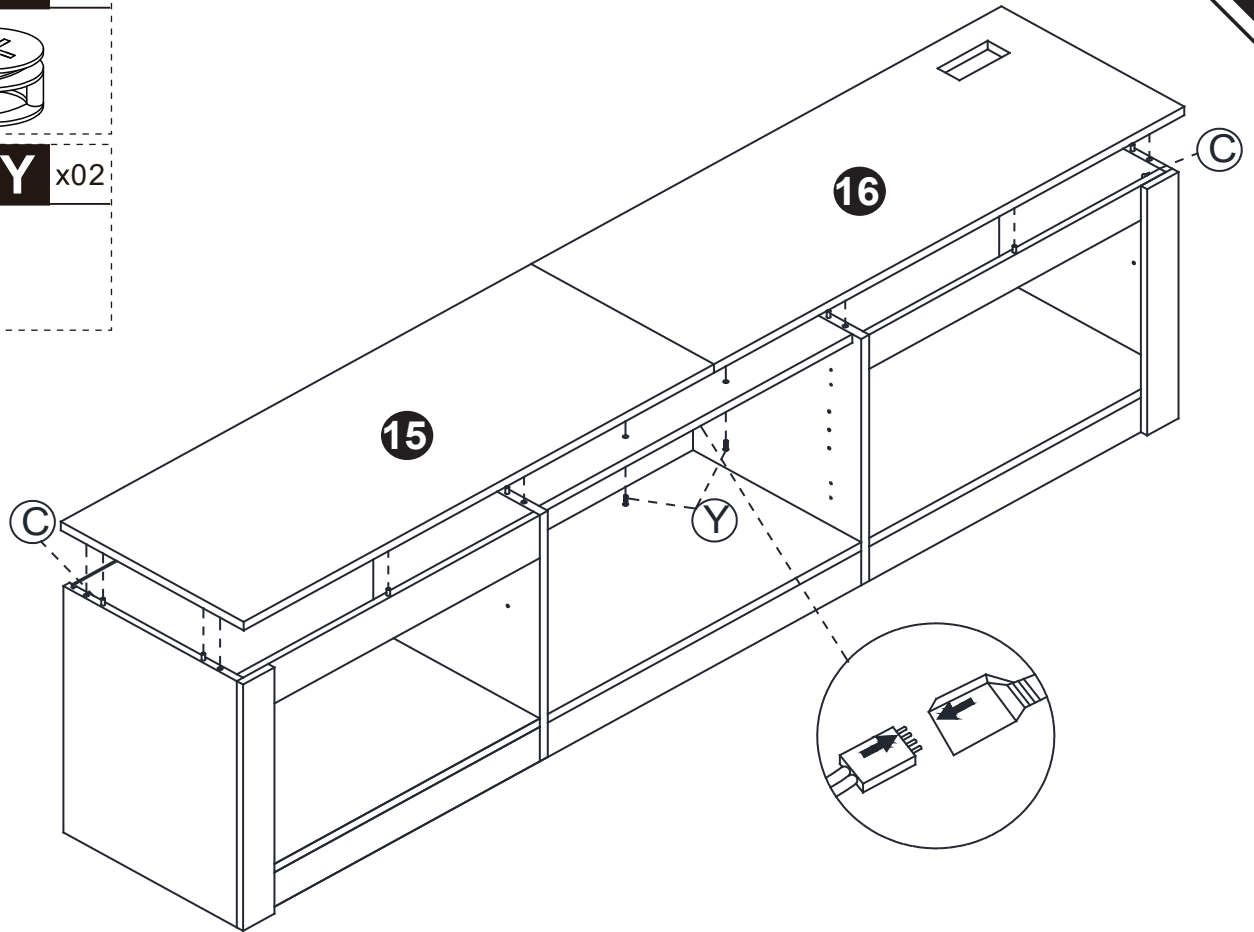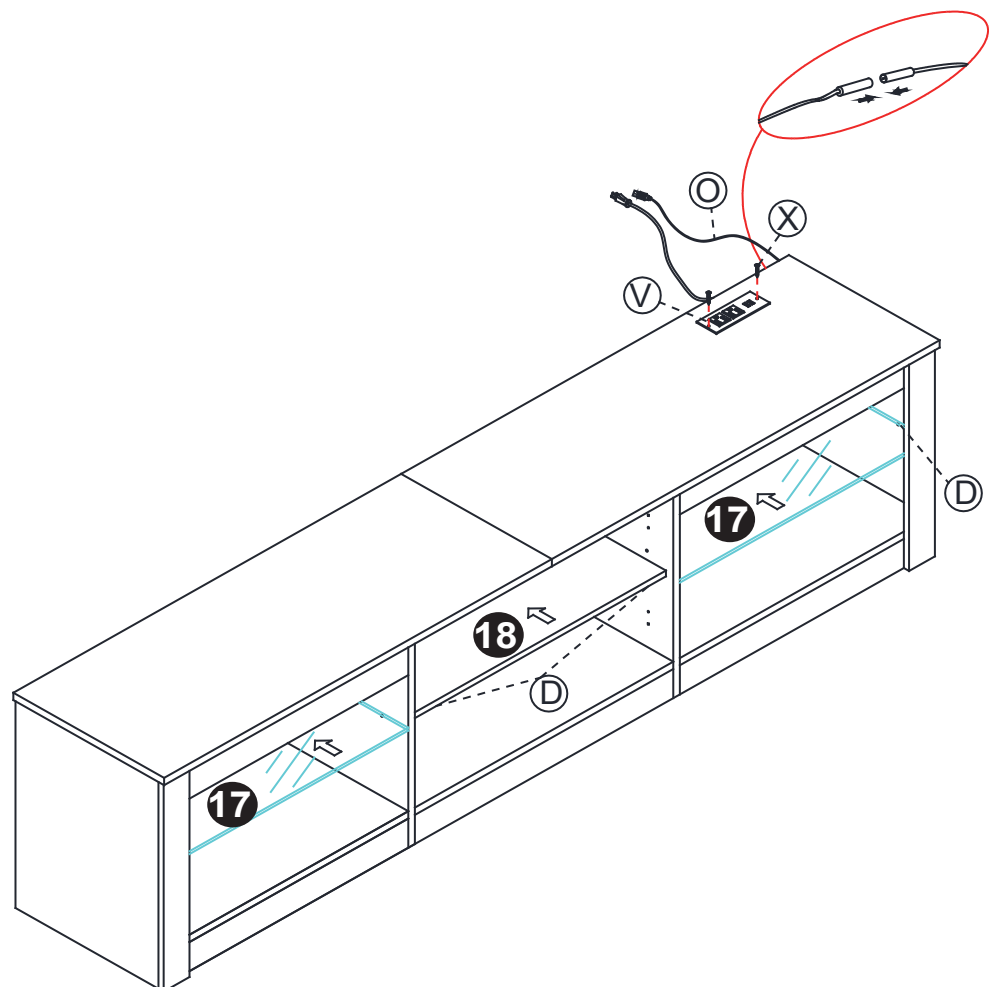C x10**Y** x02**D** x12**O** x01**V** x01**X** x02

G x16

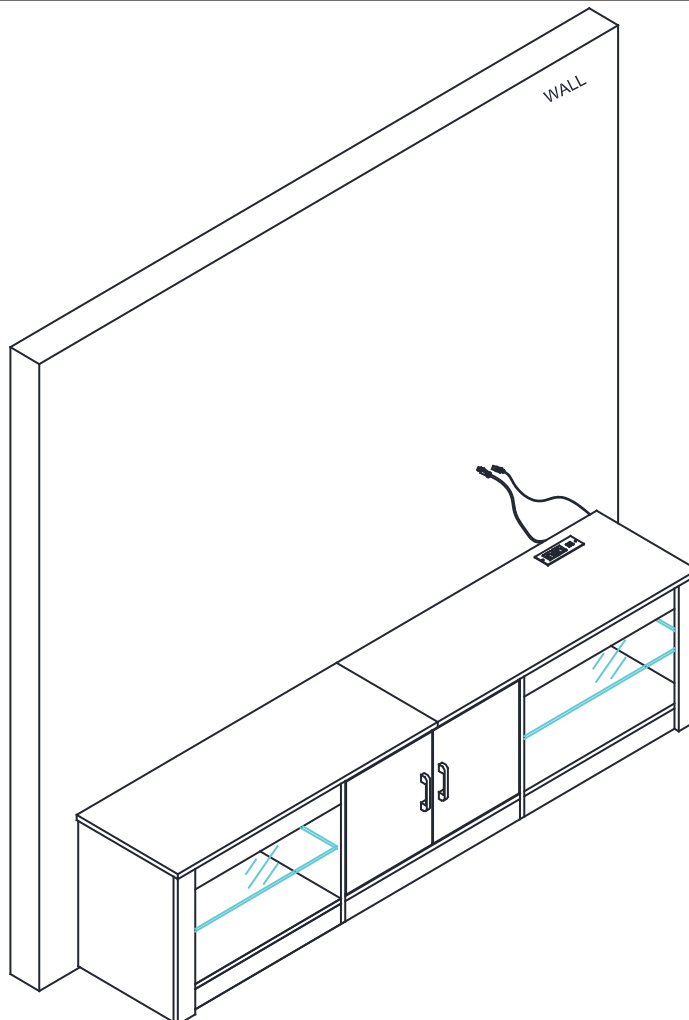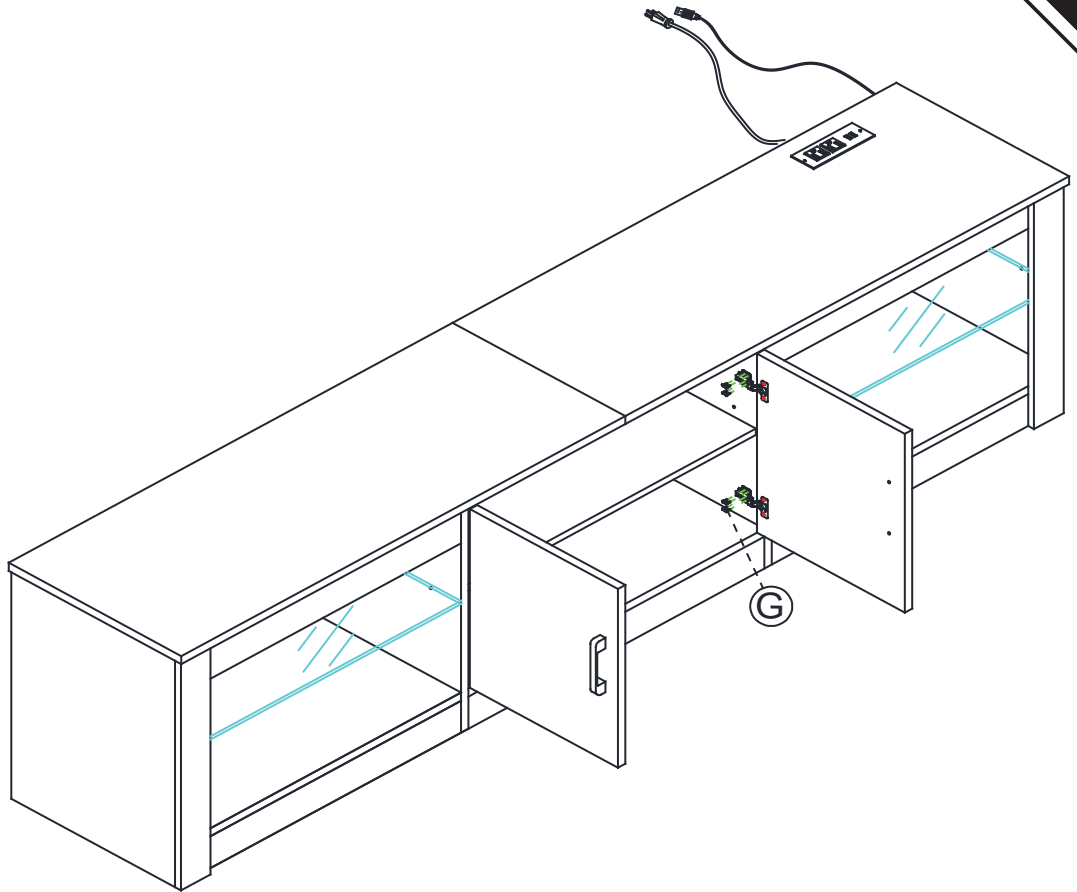

Operation Instructions of Controller

I. Specifications:

Working temperature:-20-60°C
Product size:L62xW35xH23mm
Net weight: 60g
Output:Three CMOS drain-open output
Max load current: 2 A each color


Supply voltage: DC 5V
Package size: L105xW65xH55mm
Gross weight: 70g
Connecting Mode: Common anode

II. Control Method:

Adopt IR remoter to controil the led controller, which has 24 buttons, the function of each button as the table below:

Brightness +(Speed up)	Brightness -(Speed down)	Off	On
Static red	Static green	Static blue	Static white
Static orange	Static Pea green	Static dark blue	7 color jumpy change
Static dark yellow	Static cyan	Static brown	All fade out&fade in
Static yellow	Static light blue	Static pink	7 color fade change
Static straw yellow	Static sky blue	Static purple	3 base color jumpy

III .Panel specification and connecting drawing as follows :

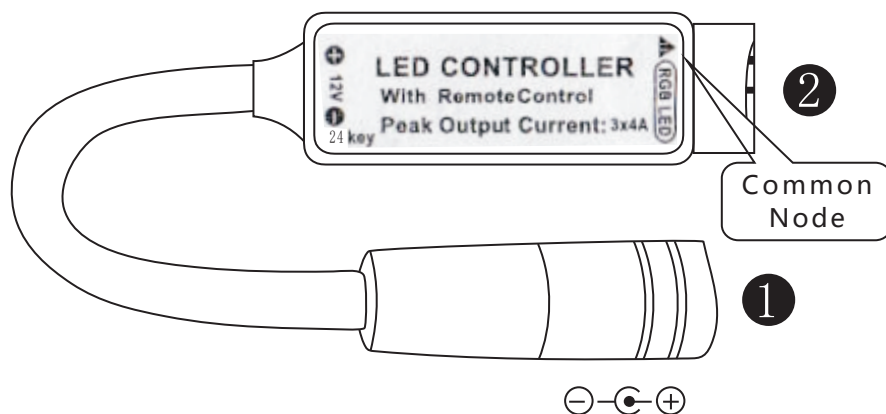

IV. Warning :

- 1 . Supply vlotage of this product is DC 5V .
- 2 . Never connect two wires directly in case of short circuit .
- 3 . Lead wire should be connected correctly according to colors that connecting diagram offers .
- 4 . Warranty of this product is one year, in this period we guarantee replace ment or repairing with no charge , but exclude the artificial situation of damaged or overload working .